

1 2 3 4 5 6 7 8

A



B

C

D

E

F

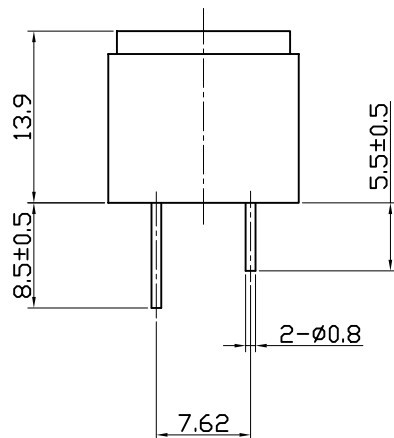

SPECIFICATION

- 1. Rated Voltage12VDC
- 2. Operating Voltage1.5~18VDC
- 3. Max. Rated Current20mA at 12VDC
- 4. Resonant Frequency4.0±0.5KHz
- 5. Min. Sound Pressure Level.....85dB at 12VDC/10cm
- 6. Tone NatureContinuous
- 7. Case Material/ColorPBT/Black
- 8. Operating Temperature-20~+80°C
- 9. Store Temperature-30~+100°C
- 10. Weight2g

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Piezo Buzzer	
				KPI-1620	
No.	DESCRIPTION	APPROVED	DATE		
TOLERANCES UNLESS NOTED OTHERWISE		APPROVALS		DATE	
X ±		DRAWN		UNIT	
.XX ±		CHECKED		mm	
.XXX ±		APPROVED		DWG NO. KP3.840.003	
90° FORMED ±2°				SCALE	
ANGLES -1°				NOT TO SCALE	
FIRST ANGLE PROJECTION				SHEET	
				VER 1.0	

1 2 3 4 5 6 7 8