

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A

B

C



D

E

F

# SPECIFICATION

- 1. Rated Voltage ..... 12 VDC
- 2. Operating Voltage ..... 3~24VDC
- 3. Max. Rated Current ..... 8mA at 12VDC
- 4. Resonant Frequency ..... 3.3±0.5KHz
- 5. Min. Sound Pressure Level..... 78dB at 12VDC/30cm
- 6. Tone Nature ..... Continuous
- 7. Shell Material/Color ..... ABS
- 8. Operating Temperature ..... -20~+60°C
- 9. Store Temperature ..... -30~+70°C
- 10. Weight ..... 2.5g

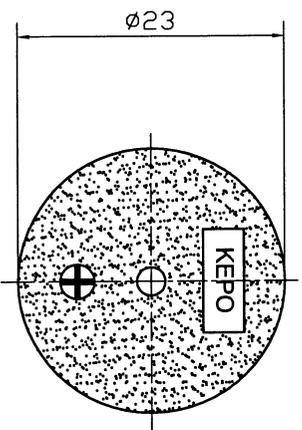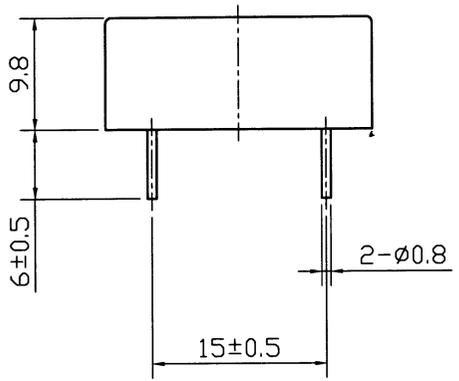

				Compliance with ROHS	
				<b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>	
No.		DESCRIPTION		APPROVED	DATE
TOLERANCES UNLESS NOTED OTHERWISE		APPROVALS		CHECKED	DATE
X *		DRAWN			
XX *		CHECKED			
XXX *		APPROVED			
90° FORMED ±1°		FIRST ANGLE PROJECTION			
ANGLES ±1°					
				UNIT	DWG NO.
				mm	KP3.840.013.01R
				SCALE	SHEET
				NOT TO SCALE	VER 1.0

1 2 3 4 5 6 7 8