

1

2

3

4

5

6

7

8

A

B

C

D

E

F

A





B

C

D

E

F

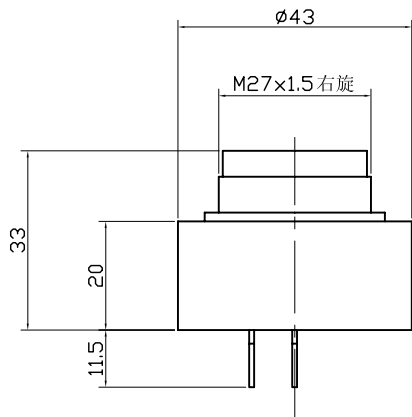

# SPECIFICATION

- 1. Rated Voltage .....230VAC
- 2. Operating Voltage .....200~240VAC
- 3. Max. Rated Current .....20mA at 230VAC
- 4. Min. Sound Pressure Level .....80dB at 230VAC/60cm
- 5. Tone Nature .....Continuous
- 6. Resonant Frequency .....2.9±0.5KHz
- 7. Case Material .....PC
- 8. Operating Temperature .....-20~+80°C
- 9. Store Temperature .....-30~+100°C
- 10. Weight .....40g

				<b>KEPO</b> NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>	
				Piezo Buzzer KPI-4310-230	
No.	DESCRIPTION	APPROVED	DATE	UNIT: mm DWG NO. KPI3.840.024.02	
<small>TOLERANCES UNLESS NOTED OTHERWISE</small> X ± .XX ± .XXX ± 90° FORWARD +1° ANGLES -1° FIRST ANGLE PROJECTION		APPROVALS	DATE		
		CHECKED		SCALE: NOT TO SCALE	SHEET: VER 1.0
		APPROVED	03.09.10		

1

2

3

4

5

6

7

8