

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D





D

E

E

F

F

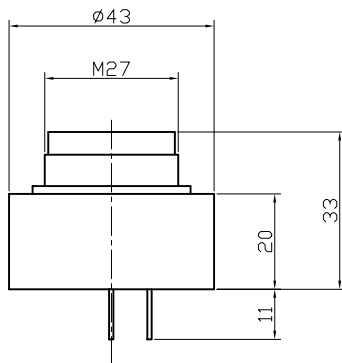

SPECIFICATION

- 1. Rated Voltage230VAC
- 2. Operating Voltage200~240VAC
- 3. Max. Rated Current20mA at 230VAC
- 4. Resonant Frequency2.9±0.5KHz
- 5. Min. Sound Pressure Level.....80dB at 230VAC/60cm
- 6. Tone NatureSlow Pulse
- 7. Case MaterialABS
- 8. Operating Temperature-20~+60°C
- 9. Store Temperature-30~+70°C
- 10. Weight40g

				KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Piezo Buzzer KPI-4311-230	
No.	DESCRIPTION	APPROVED	DATE		
<small>TOLERANCES UNLESS NOTED OTHERWISE X ± .XX ± .XXX ± 90° FORMED ±2° ANGLES -1°</small>		APPROVALS		DATE	
		DRAWN			
		CHECKED		UNIT	DWG NO.
		APPROVED		mm	KP3.840.117.01
FIRST ANGLE PROJECTION			03.04.21	SCALE	SHEET
				NOT TO SCALE	VER 1.0

1

2

3

4

5

6

7

8