

1

2

3

4

5

6

7

8

A

B

C

D

E

F

A





B

C

D

E

F

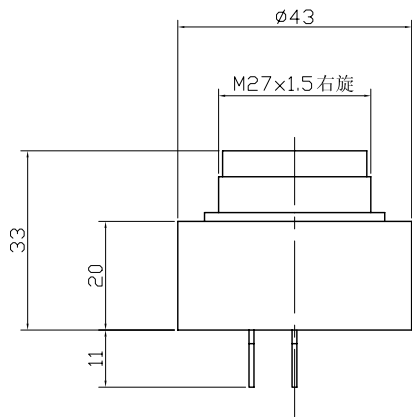

SPECIFICATION

- 1. Rated Voltage12VAC
- 2. Operating Voltage6~15VAC
- 3. Max. Rated Current20mA at 12VAC
- 4. Min. Sound Pressure Level80dB at 12VAC/60cm
- 5. Tone NatureFast pulse
- 6. Resonant Frequency2.9±0.5KHz
- 7. Case MaterialPC
- 8. Operating Temperature-20~+80°C
- 9. Store Temperature-30~+100°C
- 10. Weight40g

				KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Piezo Buzzer KPI-4312-12VAC	
No.	DESCRIPTION	APPROVED	DATE		
<small>TOLERANCES UNLESS NOTED OTHERWISE X ± .XX ± .XXX ± 90° FORWARD +2° ANGLES -1° FIRST ANGLE PROJECTION</small>		APPROVALS		DATE	
		DRAWN			
		CHECKED		UNIT	DWG NO.
		APPROVED		mm	KP3.840.113.02
			03.10.30	SCALE	SHEET
				NOT TO SCALE	VER 1.0

1

2

3

4

5

6

7

8