

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D


D

E

E



F

F



SPECIFICATION

- 1. Rated Voltage12VDC
- 2. Operating Voltage6~28VDC
- 3. Max. Rated Current20mA at 12VDC
- 4. Min. Sound Pressure Level80dB at 12VDC/60cm
- 5. Tone NatureFast pulse
- 6. Resonant Frequency2.9±0.5KHz
- 7. Case MaterialPC
- 8. Operating Temperature-20~+80°C
- 9. Store Temperature-30~+100°C
- 10. Weight40g

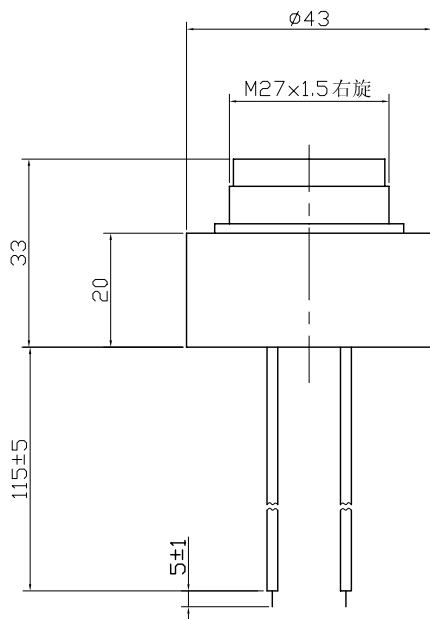

				KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Piezo Buzzer KPI-4312L	
No.	DESCRIPTION	APPROVED	DATE		
<small>TOLERANCES UNLESS NOTED OTHERWISE X ± .XX ± .XXX ± 90° FORMED ±2° ANGLES -1° FIRST ANGLE PROJECTION</small>		APPROVALS	DATE	UNIT	DWG NO.
		DRAWN		mm	KP3.840.113.03
		CHECKED		SCALE	SHEET
		APPROVED	03.10.30	NOT TO SCALE	VER 1.0

1

2

3

4

5

6

7

8