

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D





D

E

E

F

F

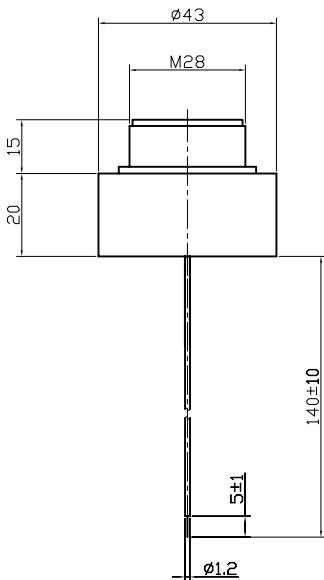

SPECIFICATION

- 1. Rated Voltage12VDC
- 2. Operating Voltage6~28VDC
- 3. Max. Rated Current20mA at 12VDC
- 4. Resonant Frequency2.9±0.5KHz
- 5. Min. Sound Pressure Level.....80dB at 12VDC/60cm
- 6. Tone NatureContinuous
- 7. Case MaterialPC
- 8. Operating Temperature-20~+80°C
- 9. Store Temperature-30~+100°C
- 10. Weight40g

				KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Piezo Buzzer KPI-4320L	
No.	DESCRIPTION	APPROVED	DATE		
<small>TOLERANCES UNLESS NOTED OTHERWISE X = ± .XX = ± .XXX = ± 90° FORWARD +2° ANGLES -1° FIRST ANGLE PROJECTION</small>		APPROVALS		DATE	
		DRAWN			
		CHECKED		UNIT	DWG NO.
		APPROVED		mm	KP3.840.027
			03.05.05	SCALE	SHEET
				NOT TO SCALE	VER 1.1

1

2

3

4

5

6

7

8