


KPI-G432X SERIES PIEZO BUZZER



DIMENSIONS

color Black
PBT Housing Material
Pin Terminal

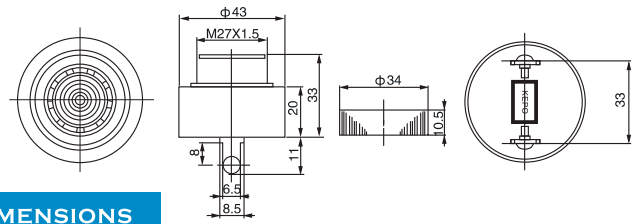

KPI-G4323/KPI-G4324

color Black
PBT Housing Material
Pin Terminal

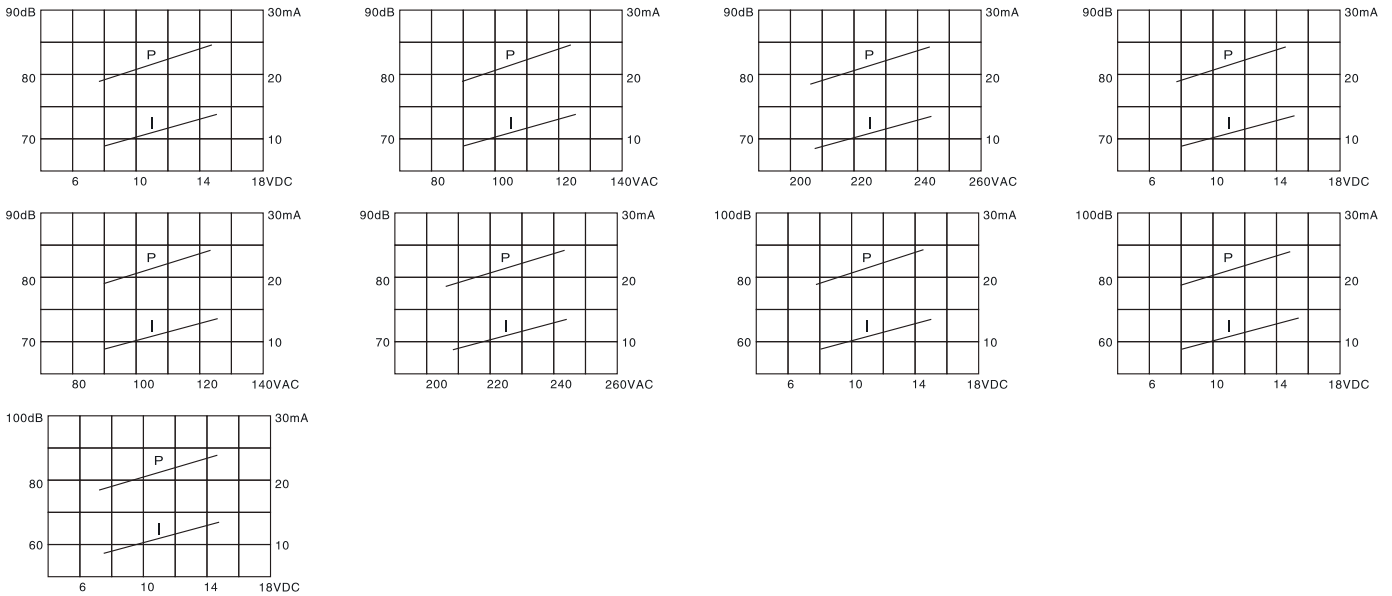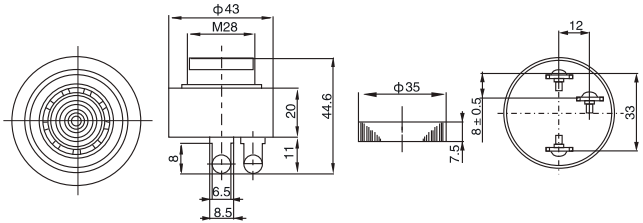

Model No	KPI-G4320	KPI-G4320-110VAC	KPI-G4320-230VAC	KPI-G4321	KPI-G4321-110VAC
Rated Voltage	12VDC	110VAC	230VAC	12VDC	110VAC
Max Allowable Voltage	6-28VDC	80-130VAC	200-240VAC	6-28VDC	100-140VAC
Max Rated Current	20mA				
Min Sound Pressure Level	80dB/12VDC/60cm	85dB/110VAC/60cm	80dB/230VAC/60cm	80dB/12VDC/60cm	80dB/110VAC/60cm
Resonant Frequency	2.9 ± 0.5KHz				
Tone Nature	Continuous			Slow Pulse	
Operating Temperature	-20 ~ +80°C				
Storage Temperature	-30 ~ +100°C				
Weight	40g				

Model No	KPI-G4321-230VAC	KPI-G4322	KPI-G4323	KPI-G4324
Rated Voltage	230VAC		12VDC	
Max Allowable Voltage	200-240VAC		6-28VDC	
Max Rated Current	20mA			
Min Sound Pressure Level	80dB/230VAC/60cm		80dB/12VDC/60cm	
Resonant Frequency	2.9 ± 0.5KHz			
Tone Nature	Slow Pulse	Fast Pulse	Continuous+Slow Pulse	Continuous+Fast Pulse
Operating Temperature	-20 ~ +80°C			
Storage Temperature	-30 ~ +100°C			
Weight	40g			