

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D




D

E

E

F

F

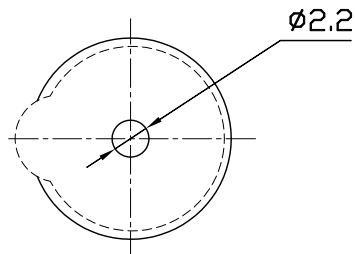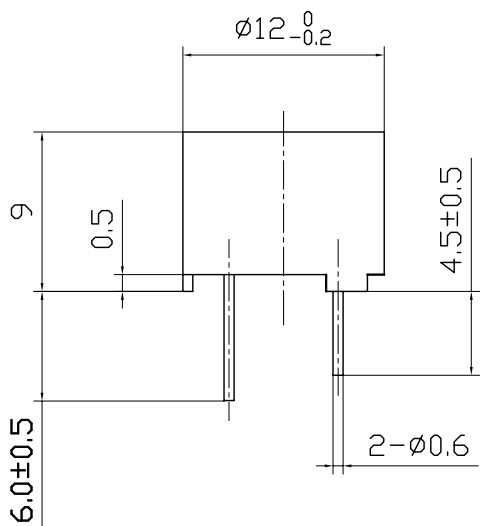

SPECIFICATION

- 1. Rated Voltage 1.5V
- 2. Operating Voltage 1~2V
- 3. Max. Rated Current 10mA
- 4. Coil Resistance 45±5 Ω
- 5. Coil Impedance 125 Ω
- 6. Min. Sound Pressure Level 80dB/10cm
- 7. Resonant Frequency 2048Hz
- 8. Case Material PBT
- 9. Operating Temperature -20~+70°C
- 10. Store Temperature -30~+80°C
- 11. Weight 2g

				KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Magnetic Buzzer KPM-1201A9	
No.	DESCRIPTION	APPROVED	DATE		
<small>TOLERANCES UNLESS NOTED OTHERWISE X ± .XX ± .XXX ± 90° FORMED ±1° ANGLES -1° FIRST ANGLE PROJECTION</small>		APPROVALS		DATE	
		DRAWN			
		CHECKED		UNIT	DWG NO.
		APPROVED		mm	KP3.840.721
			04.08.09	SCALE	SHEET
				NOT TO SCALE	VER 1.2