

1

2

3

4

5

6

7

8

A

B

C

D

E

F

A




B

C

D

E

F

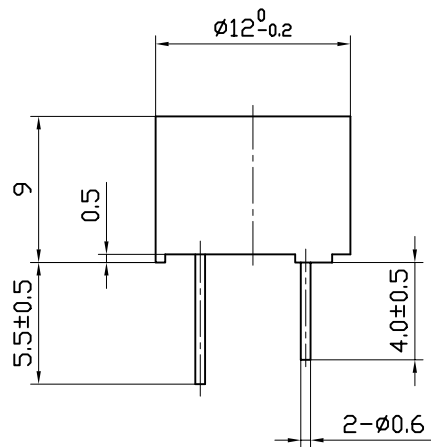

Specifications

- 1.Rated Voltage.....3V
- 2.Operating Voltage.....2~5V
- 3.Max. Rated Current.....90mA
- 4.Coil Resistance.....16±4 Ω
- 5.Coil Impedance.....40 Ω
- 4.Min. Sound Pressure Level.....85dB /10cm
- 5.Resonant Frequency.....2400Hz
- 7.Case Material.....PBT
- 8.Operating Temperature.....-20~+70℃
- 9.Store Temperature.....-30~+80℃
- 10.Weight.....2g

				KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
No.	DESCRIPTION	APPROVED	DATE	KPM-1203A	
<small>TOLERANCES UNLESS NOTED OTHERWISE X = .XX = .XXX = 90° FORWARD +2° ANGLES -1° FIRST ANGLE PROJECTION</small>		APPROVALS	DATE		
		DRAWN		UNIT	DWG NO.
	CHECKED			mm	KP3.843.662
	APPROVED		03.04.30	SCALE	NOT TO SCALE
				SHEET	VER 1.1

1

2

3

4

5

6

7

8