

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D




D

E

E


F

F

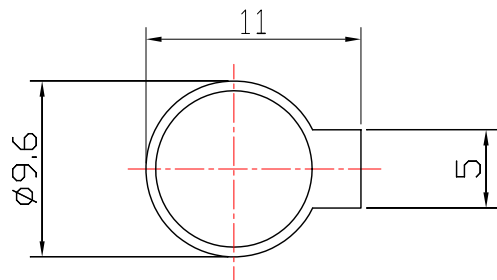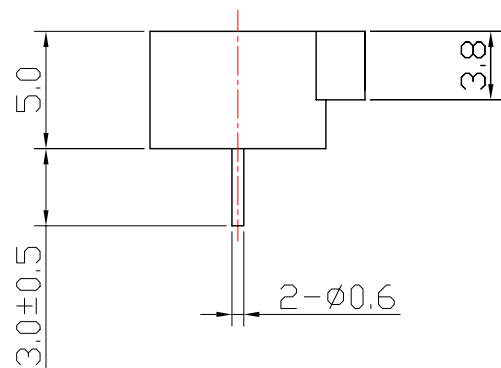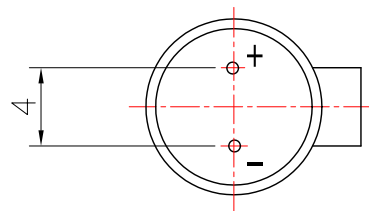

SPECIFICATION

- 1. Rated Voltage 1.5V
- 2. Operating Voltage 1~2V
- 3. Max. Rated Current 80mA
- 4. Coil Resistance 5.5±1 Ω
- 5. Coil Impedance 9.5±3 Ω
- 6. Min. Sound Pressure Level 85dB/10cm
- 7. Resonant Frequency 2731Hz
- 8. Case Material PBT
- 9. Operating Temperature -20~+70°C
- 10. Store Temperature -30~+80°C
- 11. Weight 2g

| | | | | | |
|--|-------------|-----------|----------|---|-------------|
| | | | | KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com | |
| | | | | Magnetic Buzzer KPM09-04B8 | |
| No. | DESCRIPTION | APPROVED | DATE | | |
| <small>TOLERANCES UNLESS NOTED OTHERWISE X = ± .XX = ± .XXX = ± 90° FORWARD ±2° ANGLES -1°</small> | | APPROVALS | | DATE | |
| | | DRAWN | | | |
| <small>FIRST ANGLE PROJECTION</small>  | | CHECKED | | UNIT | DWG NO. |
| | | APPROVED | | mm | KP3.840.674 |
| | | | 03.09.04 | SCALE | SHEET |
| | | | | NOT TO SCALE | VER 1.0 |