

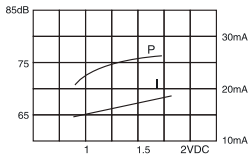
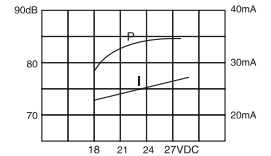
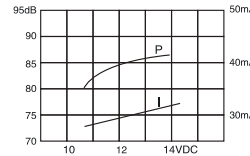
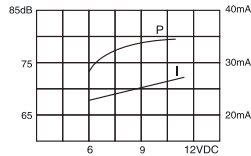
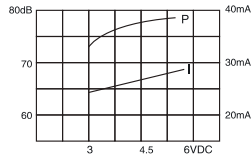


KPMB-G23XXL1 (NOTCH) SERIES MECHANICAL BUZZER

DIMENSIONS

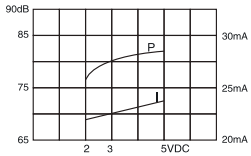

color Black
ABS Housing Material
Wire Terminal

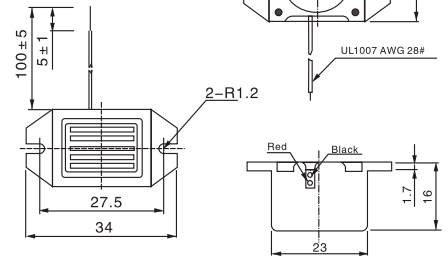

Model No	KPMB-G2315L1(Notch)	KPMB-G2303L1(Notch)	KPMB-G2345L1(Notch)	KPMB-G2309L1(Notch)	KPMB-G2312L1(Notch)	KPMB-G2324L1(Notch)
Rated Voltage	1.5VDC	3VDC	4.5VDC	9VDC	12VDC	24VDC
Operating Voltage	1.3~2VDC	2~5VDC	3~6VDC	6~12VDC	9~15VDC	15~27VDC
Max Rated Current	20mA	25mA	30mA			
Min.Sound Pressure Level	70dB/1.5VDC/20cm	75dB/3VDC/20cm	70dB/4.5VDC/20cm	75dB/9VDC/20cm	80dB/12VDC/20cm	80dB/24VDC/20cm
Resonant Frequency	400 ± 100Hz					
Operating Temperature	-20~+60°C					
Storage Temperature	-30~+70°C					
Weight	10g					