

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D




D

E

E

F

F

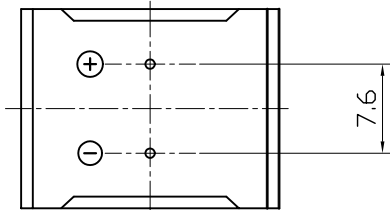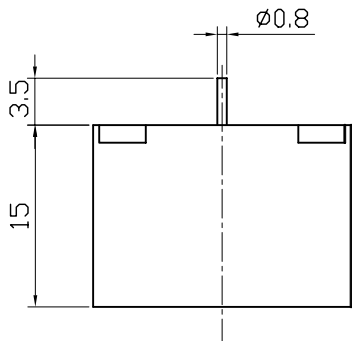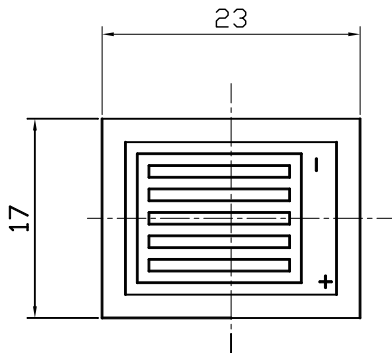

SPECIFICATION

- 1. Rated Voltage24VDC
- 2. Operating Voltage15~27VDC
- 3. Max. Rated Current25mA at 24VDC
- 4. Resonant Frequency400±100Hz
- 5. Min. Sound Pressure Level.....75dB at 24VDC/20cm
- 6. Case MaterialABS
- 7. Operating Temperature-20~+60°C
- 8. Store Temperature-30~+70°C
- 9. Weight10g

				KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Magnetic Buzzer KPMB-2324P	
No.	DESCRIPTION	APPROVED	DATE		
<small>TOLERANCES UNLESS NOTED OTHERWISE X = .XX = .XXX = 90° FILLETED ±2° ANGLES -1°</small>		DRAWN		UNIT	DWG NO.
		CHECKED		mm	KP3.840.637
FIRST ANGLE PROJECTION		APPROVED	03.09.01	SCALE	SHEET
					VER 1.1

1

2

3

4

5

6

7

8