

1

2

3

4

5

6

7


8

A

A

B

B

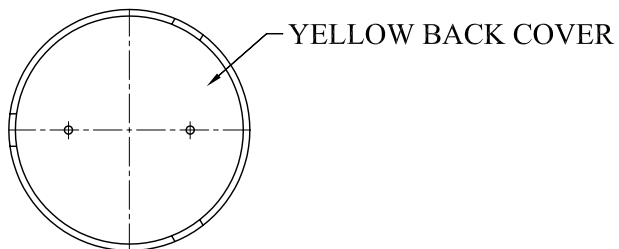


# SPECIFICATION

- 1. Rated Noise Power .....0.15W
- 2. Max. Input Power .....0.3W
- 3. Rated Frequency Range .....500~5000Hz
- 4. Rated Frequency .....1100±15%Hz
- 5. Rated Impedance.....8 Ω
- 6. Min. Sound Pressure Level.....85dB at 1KHz 1.1Vrms  
.....Sine Wave/10cm
- 7. Case Material/Color .....PA66/Black
- 8. Operating Temperature .....-20~+60°C
- 9. Store Temperature .....-30~+70°C
- 10. Weight .....10g


C

C

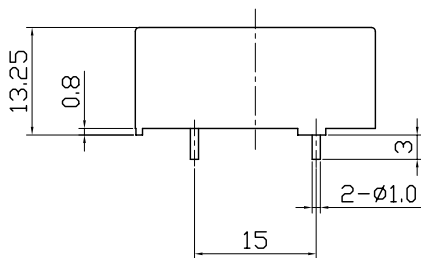

D

D

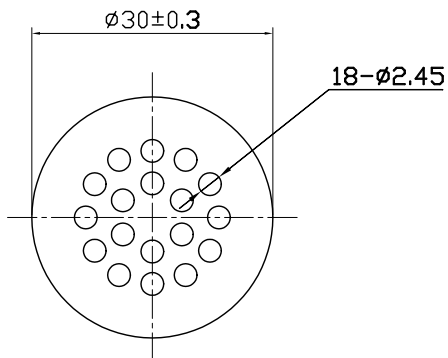

E

E

F

F

				<b>KEPO</b> NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>	
				Magnetic Buzzer KPMB-3008E	
No.	DESCRIPTION	APPROVED	DATE		
<small>TOLERANCES UNLESS NOTED OTHERWISE X = ± .XX = ± .XXX = ± 90° FORWARD ±3° ANGLES -1° FIRST ANGLE PROJECTION</small>		APPROVALS	DATE	UNIT	DWG NO.
		DRAWN		mm	KP3.840.618.04
		CHECKED		SCALE	SHEET
		APPROVED	03.09.27		VER 1.0

1

2

3

4

5

6

7

8