

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D


D

E

E


F

F

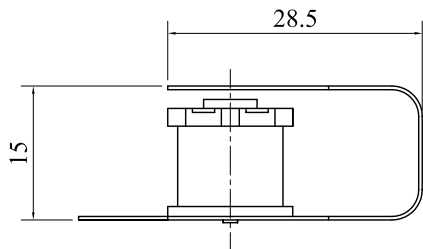

## SPECIFICATION

- 1. Rated Voltage .....12VAC/50Hz
- 2. Operating Voltage .....10.5~13.5VAC/50Hz
- 3. Max. Rated Current .....250mA at 12VAC
- 4. Coil Resistance .....54.5 Ω±10%
- 5. Min. Sound Pressure Level.....75dB at 12VAC/20cm
- 6. Shell Material .....ABS
- 7. Operating Temperature .....-20~+60°C
- 8. Store Temperature .....-30~+70°C
- 9. Weight .....11g

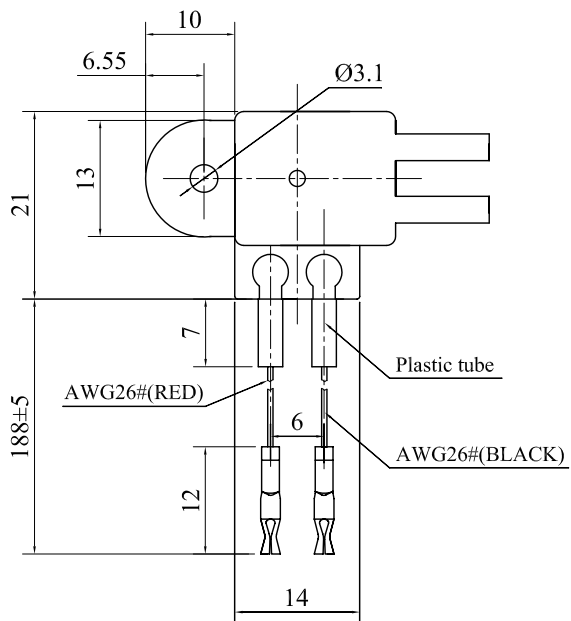

				<b>KEPO</b> NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>	
				<b>Magnetic Buzzer</b> <b>KPMB-38012LC</b>	
No.	DESCRIPTION	APPROVED	DATE		
TOLERANCES UNLESS NOTED OTHERWISE X = .XX ± .XXX ± 90° FORMED ±2° ANGLES -1°		DRAWN	CHECKED	APPROVALS	DATE
FIRST ANGLE PROJECTION				UNIT	DWG NO.
				mm	KP3.841.603
		APPROVED	03.01.15	SCALE	SHEET
				VER	1.0

1

2

3

4

5

6

7

8