


1 2 3 4 5 6 7 8

A

A

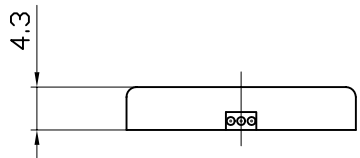

B


B

Specifications

C


C

- 1. Rated Voltage.....6 VDC
- 2. Operating Voltage.....3~18 VDC
- 3. Max. Rated Current.....5mA at 6 VDC
- 4. Min. Sound Pressure Level.....80dB at 6VDC/30cm
- 5. Resonant Frequency.....4.0±0.5KHz
- 6. Tone Nature.....Continuous
- 7. Case Material.....ABS
- 8. Operating Temperature.....-20~+60 °C
- 9. Store Temperature.....-30~+70 °C
- 10. Weight.....2g



D

D

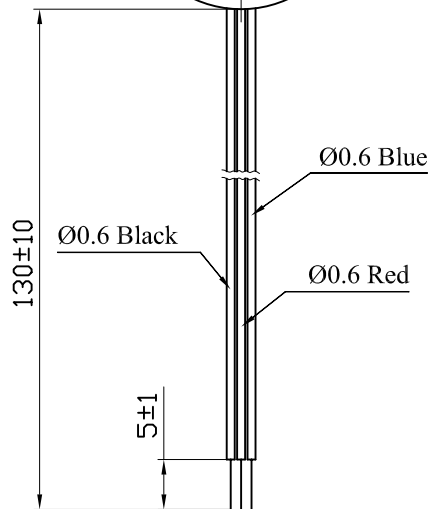

E

E

F

F

| | | | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------|----------|---------------------------------------------------------------------------------------------------------------------------------|-------------|
| | | | | KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com | |
| | | | | KPR3-2313 | |
| No. | DESCRIPTION | APPROVED | DATE | | |
| <small>TOLERANCES UNLESS NOTED OTHERWISE X = .XX ± .XXX ± 90° FORWARD +2° ANGLES -1° FIRST ANGLE PROJECTION</small> | | APPROVALS | | DATE | |
| | | DRAWN | | | |
| | | CHECKED | | UNIT | DWG NO. |
| | | APPROVED | | mm | KP3.840.312 |
| | | | 03.04.23 | SCALE | SHEET |
| | | | | NOT TO SCALE | VER 1.1 |

1 2 3 4 5 6 7 8