

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D



D

E

E

F

F

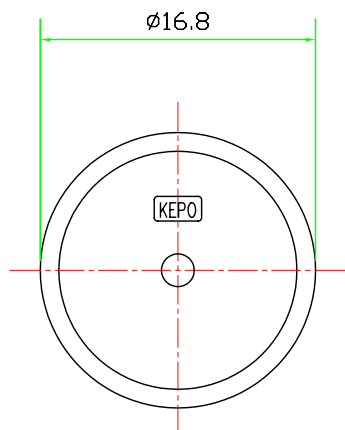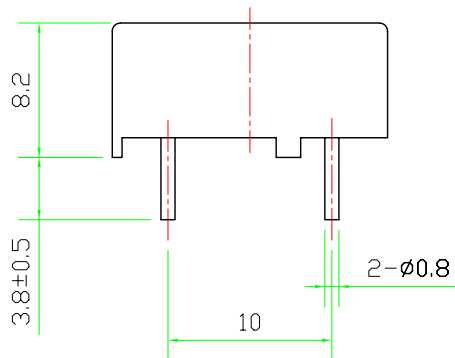

## SPECIFICATION

- 1. Rated Voltage .....12Vp-p Square Wave
- 2. Operating Voltage .....30Vp-p Square Wave
- 3. Max. Rated Current .....3mA/4.0KHz/12Vp-p Square Wave
- 4. Resonant Frequency .....4.0±0.5KHz
- 5. Min. Sound Pressure Level.....85dB/4.0KHz/12p-p Square Wave/10cm
- 6. Capacitance at 100Hz.....14000pF±30%
- 7. Shell Material/Color .....PC/Black
- 8. Operating Temperature .....-20~+85°C
- 9. Store Temperature .....-30~+85°C
- 10. Weight .....2g

				<b>KEPO</b> NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>	
				Piezo Buzzer KPT-1720	
No.	DESCRIPTION	APPROVED	DATE		
<small>TOLERANCES UNLESS NOTED OTHERWISE  X = ±  .XX = ±  .XXX = ±  90° FORWARD ±3°  ANGLES -1°</small>		APPROVALS		DATE	
		DRAWN			
		CHECKED		UNIT	DWG NO.
		APPROVED		mm	KP3.840.205
FIRST ANGLE PROJECTION 			03.01.15	SCALE	SHEET
				NOT TO SCALE	VER 1.0

1

2

3

4

5

6

7

8