

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D



D

E

E

F

F

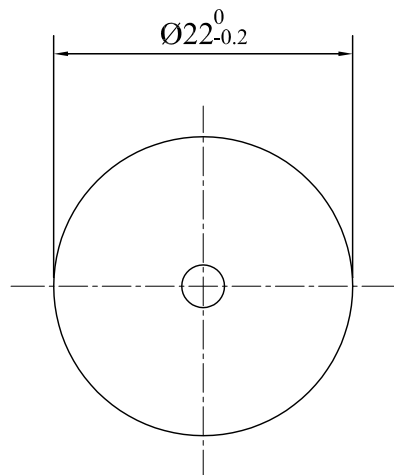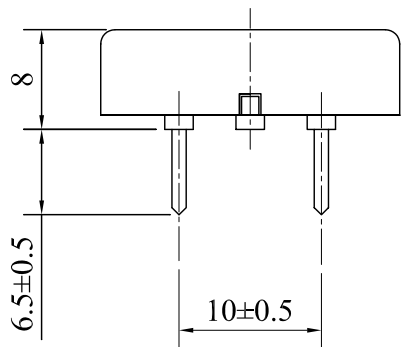

## SPECIFICATION

- 1. Rated Voltage .....12Vp-p Square Wave
- 2. Operating Voltage .....3~30Vp-p Square Wave
- 3. Max. Rated Current .....3mA/12Vp-p Square Wave/4KHz
- 4. Resonant Frequency .....4.0±0.5KHz
- 5. Min. Sound Pressure Level.....88dB/12p-p Square Wave/10cm
- 6. Capacitance at 100Hz.....15000pF±30%
- 7. Shell Material/Color .....PA/Black
- 8. Operating Temperature .....-20~+80℃
- 9. Store Temperature .....-30~+100℃
- 10. Weight .....2.5g

				<b>KEPO</b> NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>	
				Piezo Buzzer KPT-2210A	
No.	DESCRIPTION	APPROVED	DATE		
<small>TOLERANCES UNLESS NOTED OTHERWISE  X = ±  .XX = ±  .XXX = ±  90° FORMED ±2°  ANGLES -1°  FIRST ANGLE PROJECTION</small>		APPROVALS		DATE	
		DRAWN			
		CHECKED			
		APPROVED	03.01.16	UNIT: mm	DWG NO. KP3.840.269
				SCALE	SHEET
					VER 1.0

1

2

3

4

5

6

7

8