
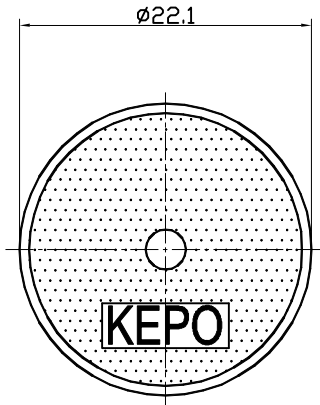


SPECIFICATION

- 1. Rated Voltage10Vp-p Square Wave
- 2. Max. Allowable Voltage30Vp-p Square Wave
- 3. Max. Rated Current6mA at 4.0KHz/10Vp-p Square Wave
- 4. Resonant Frequency4.0±0.5KHz
- 5. Min. Sound Pressure Level.....84dB at 4.0KHz/10Vp-p Square Wave/10cm
- 6. Capacitance at 100Hz12000pF±30%
- 7. Shell Material/ColorABS(Black)
- 8. Operating Temperature-30~+85°C
- 9. Store Temperature-40~+95°C
- 10. Weight2.5g

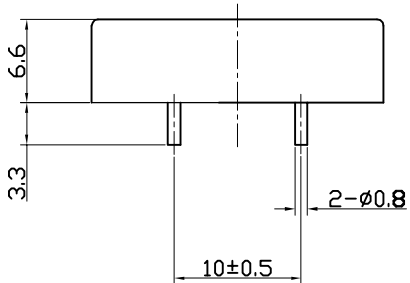

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
		Piezo Transducer			
		KPT-2260			
TOLERANCES UNLESS NOTED OTHERWISE .X * .XX * .XXX * 90° FORMED ±2° ANGLES ±1° FIRST ANGLE PROJECTION		APPROVALS	DATE	UNIT	DWG NO.
		DRAWN	CHECKED	mm	KP3.842.203
		APPROVED	05.06.22	SCALE	SHEET
				VER	1.3