




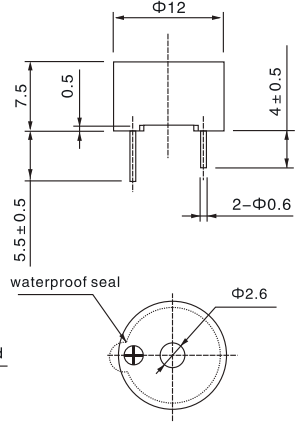



KPX-G 12XXUB SERIES MAGNETIC BUZZER

DIMENSIONS

color Black
PBT Housing Material
Pin Terminal



Model No	KPX-G1201UB	KPX-G1203UB	KPX-G1205UB	KPX-G1212UB
Rated Voltage	1.5VDC	3VDC	5VDC	12VDC
Operating Voltage	1~2VDC	2~5VDC	4~8VDC	8~15VDC
Max Rated Current	30mA			
Min.Sound Pressure Level	75dB/1.5VDC/10cm	85dB/3VDC/10cm	85dB/5VDC/10cm	85dB/12VDC/10cm
Resonant Frequency	2.3 ± 0.5 KHz			
Tone Nature	Continuous			
Operating Temperature	-20~+70°C			
Storage Temperature	-30~+80°C			
Weight	2g			

RoHS
Compliant