


# SPECIFICATION

1. Rated Voltage.....15Vp-p Square Wave
2. Max. Rated Input Voltage.....60Vp-p Square Wave
3. Min. Sound Pressure Level.....100dB at 15Vp-p Square Wave/3.3KHz/50cm
4. Capacitance at 100Hz .....200000pF±30%
5. Resonant Frequency.....2~4KHz
6. Shell Material/Color.....PA6/Black
7. Operating Temperature.....-20~+105°C
8. Store Temperature.....-30~+105°C
9. Weight.....14g

dB SPL

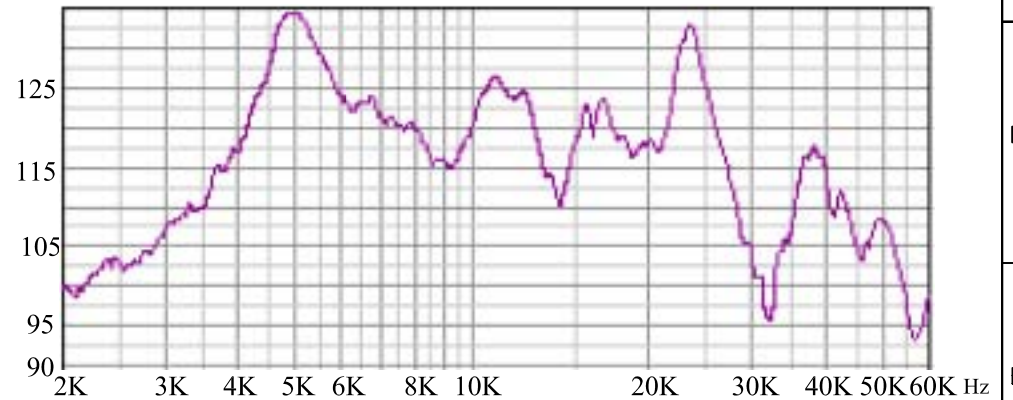

				<b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>	
				Ultra Sonic Transducer PCT-5700	
No.	DESCRIPTION	APPROVED	DATE	UNIT DWG NO.	
TOLERANCES UNLESS NOTED OTHERWISE X ± .XX ± .XXX ± 90° FORMED ±2° ANGLES -1° FIRST ANGLE PROJECTION		APPROVALS		mm KP3.840.526	
		CHECKED		SCALE SHEET VER	
		APPROVED	04.12.22	NOT TO SCALE 1.4	