

1

2

3

4

5

6

7

8


A

A

B

B

SPECIFICATION

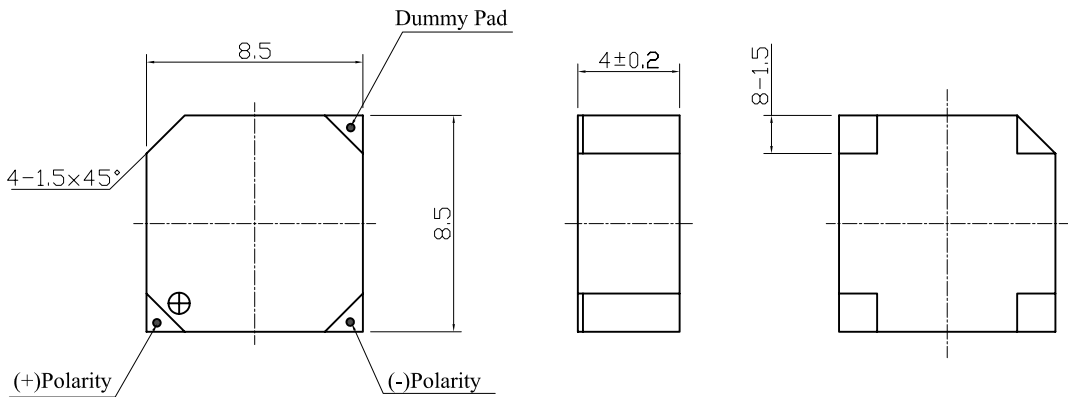


- 1. Rated Voltage3.6V
- 2. Operating Voltage2.0~5.0V
- 3. Max. Rated Current90mA
- 4. Resonant Frequency2400Hz
- 5. Min. Sound Pressure Level.....85dB/10cm
- 6. Coil Resistance16±3 Ω
- 7. Case MaterialPPS
- 8. Operating Temperature-30~+70℃
- 9. Store Temperature-40~+85℃

C

C

D

D

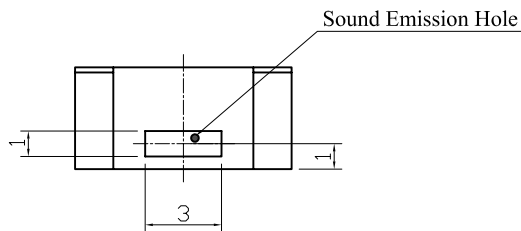

E

E

F

F

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Magnetic Buzzer SMT-8540A	
No.	DESCRIPTION	APPROVED	DATE		
TOLERANCES UNLESS NOTED OTHERWISE X ± .XX ± .XXX ± 90° FORMED +1° ANGLES -1° FIRST ANGLE PROJECTION		APPROVALS	DATE	UNIT	DWG NO.
		CHECKED		mm	KP3.840.859
		APPROVED	04.11.08	SCALE	SHEET
				NOT TO SCALE	VER 1.0

1

2

3

4

5

6

7

8