

CATALOG



Cable Gland

R&R
YUNHE ELECTRIC

PRODUCTS



- 1** Plastic fixed cable gland PG type
- 2** Plastic fixed cable gland M type
- 3** Plastic fixed cable gland PG-L type long thread
- 4** Plastic fixed cable gland M-L type long thread
- 5** Plastic fixed cable gland NPT type
- 6** Plastic fixed cable gland G type



- 7** Plastic fixed cable gland PG-P type
- 8** Plastic fixed cable gland M-P type
- 9** Plastic fixed cable gland PG-LP type long thread
- 10** Plastic fixed cable gland M-LP type long thread



- 11** Plastic fixed cable gland PG/M-R type
- 12** Plastic fixed cable gland PG/M-LR type long thread
- 13** Plastic fixed cable gland NPT/G-R type



- 16** Plastic fixed cable gland PGL type
- 17** Plastic fixed cable gland ML type



- 18** Plastic fixed cable gland PG-A type
- 19** Plastic fixed cable gland MG-A type
- 20** Plastic fixed cable gland PG-B type
- 21** Plastic fixed cable gland M-B type
- 22** Plastic fixed cable gland PG-ST/M-ST type




- 23** Plastic threaded plug PG/M-T type

Plastic fixed cable gland PG type

CE SGS IP68

A 螺帽 Lock Nut
B 平垫 Washer
C 主体 Body
D 防水圈 Seal
E 迫紧螺帽 Sealing Nut



■ 产品材质: A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。

■ 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ 工作温度: 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。

■ 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ 颜色种类: 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ Material: Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).

■ Thread spec.: Metric, PG, G, NPT.

■ Working temperature: -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.


■ Characteristics: Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

■ Color: Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
PG7	PG7	3~6.5	12.5	9	18/16	100
PG7	PG7	2~5	12.5	9	18/16	100
PG9	PG9	4~8	15.2	9	22/19	100
PG9	PG9	2~6	15.2	9	22/19	100
PG11	PG11	5~10	18.6	9	24/22	100
PG11	PG11	3~7	18.6	9	24/22	100
PG13.5	PG13.5	6~11	20.4	10	27/24	100
PG13.5	PG13.5	5~9	20.4	10	27/24	100
PG16	PG16	10~13	22.5	10	30/27	100
PG16	PG16	7~12	22.5	10	30/27	100
PG19	PG19	12~15	24	10	30/28	100
PG19	PG19	10~12	24	10	30/28	100
PG21	PG21	13~18	28.3	12	35/33	100
PG21	PG21	9~16	28.3	12	35/33	100
PG25	PG25	16~21	30	12	37/35	50
PG25	PG25	13~18	30	12	37/35	50
PG29	PG29	18~25	37	12	45/42	50
PG29	PG29	13~20	37	12	45/42	50
PG36	PG36	22~32	47	15	58/52	20
PG36	PG36	20~26	47	15	58/52	20
PG42	PG42	32~38	54	18	62/58	20
PG42	PG42	25~31	54	18	62/58	20
PG48	PG48	37~44	59.3	18	70/64	20
PG48	PG48	29~35	59.3	18	70/64	20
PG63	PG63	42~50	71	30	83/77	10
PG63	PG63	32~40	71	30	83/77	10

2 Plastic fixed cable gland M type


CE SGS IP68

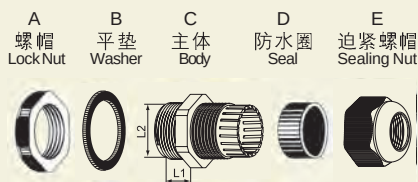

- **产品材质:** A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。
- **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
- **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。
- **产品特性:** 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。
- **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

- **Material:** Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).
- **Thread spec.:** Metric, PG, G, NPT.
- **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.
- **Characteristics:** Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.
- **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.


产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
M8	M8x1.25	2.5~4.5	8	8	13/12	100
M8	M8x1.25	1~2.5	8	8	13/12	100
M10	M10x1.5	3~6	10	8	15/13	100
M10	M10x1.5	1.5~3	10	8	15/13	100
M12	M12x1.5	3~6.5	12	9	18/16	100
M12	M12x1.5	2~5	12	9	18/16	100
M16	M16x1.5	4~8	16	9	22/19	100
M16	M16x1.5	2~6	16	9	22/19	100
M18	M18x1.5	5~10	18	9	24/22	100
M18	M18x1.5	3~7	18	9	24/22	100
M20	M20x1.5	6~11	20	10	27/24	100
M20	M20x1.5	5~9	20	10	27/24	100
M22	M22x1.5	10~13	22	10	30/27	100
M22	M22x1.5	7~12	22	10	30/27	100
M24	M24x1.5	12~15	24	10	30/28	100
M24	M24x1.5	10~12	24	10	30/28	100
M25	M25x1.5	12~15	25	11	31/28	100
M25	M25x1.5	10~12	25	11	31/28	100
M27	M27x1.5	13~18	27	12	35/33	100
M27	M27x1.5	9~16	27	12	35/33	100
M28	M28x1.5	13~18	28	12	35/33	100
M28	M28x1.5	9~16	28	12	35/33	100
M30	M30x1.5	16~21	30	12	37/35	50
M30	M30x1.5	13~18	30	12	37/35	50
M32	M32x1.5	16~21	32	12	38/35	50
M32	M32x1.5	13~18	32	12	38/35	50
M36	M36x1.5	18~25	36	12	45/42	50
M36	M36x1.5	13~20	36	12	45/42	50
M40	M40x1.5	22~32	40	15	52/52	20
M40	M40x1.5	20~26	40	15	52/52	20
M46	M46x1.5	22~32	46	15	58/52	20
M46	M46x1.5	20~26	46	15	58/52	20
M50	M50x1.5	32~38	50	18	62/58	20
M50	M50x1.5	25~31	50	18	62/58	20
M58	M58x1.5	37~44	58	18	70/64	20
M58	M58x1.5	29~35	58	18	70/64	20
M63	M63x1.5	37~44	63	18	72/64	20
M63	M63x1.5	29~35	63	18	72/64	20
M71	M71x1.5	42~50	71	30	83/77	10
M71	M71x1.5	32~40	71	30	83/77	10

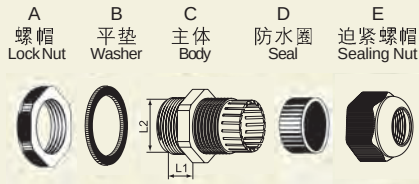

- **产品材质:** A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。
- **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
- **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。
- **产品特性:** 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。
- **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

- **Material:** Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).
- **Thread spec.:** Metric, PG, G, NPT.
- **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.
- **Characteristics:** Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.
- **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1(mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
PG7-L	PG7	3~6.5	12.5	15	18/16	100
PG7-L	PG7	2~5	12.5	15	18/16	100
PG9-L	PG9	4~8	15.2	15	22/19	100
PG9-L	PG9	2~6	15.2	15	22/19	100
PG11-L	PG11	5~10	18.6	15	24/22	100
PG11-L	PG11	3~7	18.6	15	24/22	100
PG13.5-L	PG13.5	6~11	20.4	15	27/24	100
PG13.5-L	PG13.5	5~9	20.4	15	27/24	100
PG16-L	PG16	10~13	22.5	15	30/27	100
PG16-L	PG16	7~12	22.5	15	30/27	100
PG19-L	PG19	12~15	24	15	30/28	100
PG19-L	PG19	10~12	24	15	30/28	100
PG21-L	PG21	13~18	28.3	15	35/33	100
PG21-L	PG21	9~16	28.3	15	35/33	100
PG25-L	PG25	16~21	30	15	37/35	50
PG25-L	PG25	13~18	30	15	37/35	50
PG29-L	PG29	18~25	37	15	45/42	50
PG29-L	PG29	13~20	37	15	45/42	50
PG36-L	PG36	22~32	47	18	58/52	20
PG36-L	PG36	20~26	47	18	58/52	20
PG42-L	PG42	32~38	54	20	62/58	20
PG42-L	PG42	25~31	54	20	62/58	20
PG48-L	PG48	37~44	59.3	20	70/64	20
PG48-L	PG48	29~35	59.3	20	70/64	20

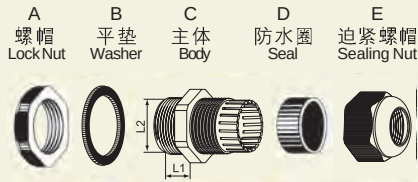

■ **产品材质:** A.C. E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。

■ **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。

■ **产品特性:** 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ **Material:** Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).


■ **Thread spec.:** Metric, PG, G, NPT.

■ **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.

■ **Characteristics:** Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

■ **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
M12-L	M12x1.5	3~6.5	12	15	18/16	100
M12-L	M12x1.5	2~5	12	15	18/16	100
M16-L	M16x1.5	4~8	16	15	22/19	100
M16-L	M16x1.5	2~6	16	15	22/19	100
M18-L	M18x1.5	5~10	18	15	24/22	100
M18-L	M18x1.5	3~7	18	15	24/22	100
M20-L	M20x1.5	6~11	20	15	27/24	100
M20-L	M20x1.5	5~9	20	15	27/24	100
M22-L	M22x1.5	10~13	22	15	30/27	100
M22-L	M22x1.5	7~12	22	15	30/27	100
M24-L	M24x1.5	12~15	24	15	30/28	100
M24-L	M24x1.5	10~12	24	15	30/28	100
M25-L	M25x1.5	12~15	25	15	31/28	100
M25-L	M25x1.5	10~12	25	15	31/28	100
M27-L	M27x1.5	13~18	27	15	35/33	100
M27-L	M27x1.5	9~16	27	15	35/33	100
M28-L	M28x1.5	13~18	28	15	35/33	100
M28-L	M28x1.5	9~16	28	15	35/33	100
M30-L	M30x1.5	16~21	30	15	37/35	50
M30-L	M30x1.5	13~18	30	15	37/35	50
M32-L	M32x1.5	16~21	32	15	38/35	50
M32-L	M32x1.5	13~18	32	15	38/35	50
M36-L	M36x1.5	18~25	36	15	45/42	50
M36-L	M36x1.5	13~20	36	15	45/42	50
M40-L	M40x1.5	22~32	40	18	52/52	20
M40-L	M40x1.5	20~26	40	18	52/52	20
M46-L	M46x1.5	22~32	46	18	58/52	20
M46-L	M46x1.5	20~26	46	18	58/52	20
M50-L	M50x1.5	32~38	50	20	62/58	20
M50-L	M50x1.5	25~31	50	20	62/58	20
M58-L	M58x1.5	37~44	58	20	70/64	20
M58-L	M58x1.5	29~35	58	20	70/64	20
M63-L	M63x1.5	37~44	63	20	72/64	20
M63-L	M63x1.5	29~35	63	20	72/64	20

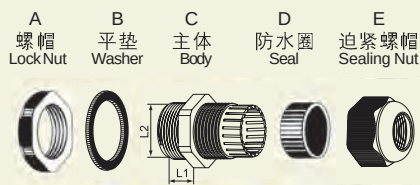

■ **产品材质:** A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。

■ **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。

■ **产品特性:** 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ **Material:** Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).

■ **Thread spec.:** Metric, PG, G, NPT.

■ **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.


■ **Characteristics:** Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

■ **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
NPT3/8"	NPT3/8"	6~10	17.1	15	22	100
NPT3/8"	NPT3/8"	4~8	17.1	15	22	100
NPT1/2"	NPT1/2"	8~14	21.3	15	27	100
NPT1/2"	NPT1/2"	6~11	21.3	15	27	100
NPT3/4"	NPT3/4"	12~18	26.6	15	33	100
NPT3/4"	NPT3/4"	10~16	26.6	15	33	100
NPT1"	NPT1"	18~25	33.5	17	41	20
NPT1"	NPT1"	16~22	33.5	17	41	20
NPT1 1/4"	NPT1 1/4"	24~32	42	17	50	20
NPT1 1/4"	NPT1 1/4"	20~25	42	17	50	20
NPT1 1/2"	NPT1 1/2"	22~32	48	17	57	20
NPT1 1/2"	NPT1 1/2"	20~26	48	17	57	20

6 Plastic fixed cable gland G type


CE SGS IP68

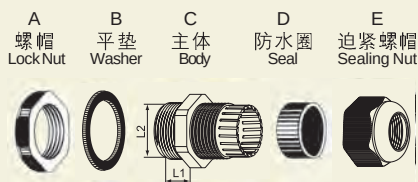

- **产品材质:** A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。
- **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
- **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。
- **产品特性:** 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。
- **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

- **Material:** Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).
- **Thread spec.:** Metric, PG, G, NPT.
- **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.
- **Characteristics:** Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.
- **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
G1/4	G1/4	4.5~8	13.1	9	19/19	100
G1/4	G1/4	3~5.3	13.1	9	19/19	100
G3/8	G3/8	6~10	16.6	10	22/22	100
G3/8	G3/8	4~7	16.6	10	22/22	100
G1/2	G1/2	9~14	20.9	10	27/27	100
G1/2	G1/2	6~11	20.9	10	27/27	100
G3/4	G3/4	13~18	26.4	12	33/33	100
G3/4	G3/4	10~16	26.4	12	33/33	100
G1	G1	18~25	33.2	15	43/41	20
G1	G1	15~22	33.2	15	43/41	20
G1 1/4	G1 1/4	24~30	41.9	15	55/50	20
G1 1/4	G1 1/4	20~25	41.9	15	55/50	20
G1 1/2	G1 1/2	31~41	48	20	57/62	20
G1 1/2	G1 1/2	26~32	48	20	57/62	20
G2	G2	44~51	60	20	70/75	20
G2	G2	40~46	60	20	70/75	20
G3	G3	66~77	88	25	110/110	5
G3	G3	58~68	88	25	110/110	5

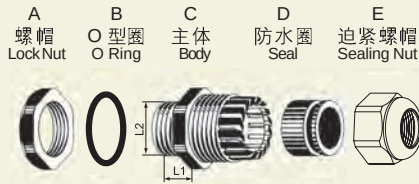


- **产品材质:** A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。
- **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
- **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。
- **产品特性:** 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。
- **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

- **Material:** Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).
- **Thread spec.:** Metric, PG, G, NPT.
- **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.
- **Characteristics:** Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.
- **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
PG7-P	PG7	3~6.5	12.5	9	18/16	100
PG7-P	PG7	2~5	12.5	9	18/16	100
PG9-P	PG9	4~8	15.2	9	22/19	100
PG9-P	PG9	2~6	15.2	9	22/19	100
PG11-P	PG11	5~10	18.6	9	24/22	100
PG11-P	PG11	3~7	18.6	9	24/22	100
PG13.5-P	PG13.5	6~11	20.4	10	27/24	100
PG13.5-P	PG13.5	5~9	20.4	10	27/24	100
PG16-P	PG16	10~13	22.5	10	30/27	100
PG16-P	PG16	7~12	22.5	10	30/27	100
PG19-P	PG19	12~15	24	10	30/28	100
PG19-P	PG19	10~12	24	10	30/28	100
PG21-P	PG21	13~18	28.3	12	35/33	100
PG21-P	PG21	9~16	28.3	12	35/33	100
PG25-P	PG25	16~21	30	12	37/35	50
PG25-P	PG25	13~18	30	12	37/35	50
PG29-P	PG29	18~25	37	12	45/42	50
PG29-P	PG29	13~20	37	12	45/42	50
PG36-P	PG36	22~32	47	15	58/52	20
PG36-P	PG36	20~26	47	15	58/52	20
PG42-P	PG42	32~38	54	18	62/58	20
PG42-P	PG42	25~31	54	18	62/58	20
PG48-P	PG48	37~44	59.3	18	70/64	20
PG48-P	PG48	29~35	59.3	18	70/64	20

A 螺帽 Lock Nut
B O型圈 O Ring
C 主体 Body
D 防水圈 Seal
E 迫紧螺帽 Sealing Nut



■ 产品材质: A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。

■ 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ 工作温度: 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。

■ 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ 颜色种类: 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ Material: Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).

■ Thread spec.: Metric, PG, G, NPT.

■ Working temperature: -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.

■ Characteristics: Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.



■ Color: Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
M12-P	M12x1.5	3~6.5	12	9	18/16	100
M12-P	M12x1.5	2~5	12	9	18/16	100
M16-P	M16x1.5	4~8	16	9	22/19	100
M16-P	M16x1.5	2~6	16	9	22/19	100
M18-P	M18x1.5	5~10	18	9	24/22	100
M18-P	M18x1.5	3~7	18	9	24/22	100
M20-P	M20x1.5	6~11	20	10	27/24	100
M20-P	M20x1.5	5~9	20	10	27/24	100
M22-P	M22x1.5	10~13	22	10	30/27	100
M22-P	M22x1.5	7~12	22	10	30/27	100
M25-P	M25x1.5	12~15	25	11	31/28	100
M25-P	M25x1.5	10~12	25	11	31/28	100
M28-P	M28x1.5	13~18	28	12	35/33	100
M28-P	M28x1.5	9~16	28	12	35/33	100
M30-P	M30x1.5	16~21	30	12	37/35	50
M30-P	M30x1.5	13~18	30	12	37/35	50
M32-P	M32x1.5	16~21	32	12	38/35	50
M32-P	M32x1.5	13~18	32	12	38/35	50
M36-P	M36x1.5	18~25	36	12	45/42	50
M36-P	M36x1.5	13~20	36	12	45/42	50
M40-P	M40x1.5	22~32	40	15	52/52	20
M40-P	M40x1.5	20~26	40	15	52/52	20
M46-P	M46x1.5	22~32	46	15	58/52	20
M46-P	M46x1.5	20~26	46	15	58/52	20
M50-P	M50x1.5	32~38	50	18	62/58	20
M50-P	M50x1.5	25~31	50	18	62/58	20
M58-P	M58x1.5	37~44	58	18	70/64	20
M58-P	M58x1.5	29~35	58	18	70/64	20
M63-P	M63x1.5	37~44	63	18	72/64	20
M63-P	M63x1.5	29~35	63	18	72/64	20

9 Plastic fixed cable gland PG-LP type long thread (Section plane)

CE SGS IP68


A 螺帽
Lock Nut
B O型圈
O Ring
C 主体
Body
D 防水圈
Seal
E 迫紧螺帽
Sealing Nut



- 产品材质: A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。
- 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
- 工作温度: 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。
- 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。
- 颜色种类: 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

- Material: Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).
- Thread spec.: Metric, PG, G, NPT.
- Working temperature: -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.
- Characteristics: Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.
- Color: Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1(mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
PG7-LP	PG7	3~6.5	12.5	15	18/16	100
PG7-LP	PG7	2~5	12.5	15	18/16	100
PG9-LP	PG9	4~8	15.2	15	22/19	100
PG9-LP	PG9	2~6	15.2	15	22/19	100
PG11-LP	PG11	5~10	18.6	15	24/22	100
PG11-LP	PG11	3~7	18.6	15	24/22	100
PG13.5-LP	PG13.5	6~11	20.4	15	27/24	100
PG13.5-LP	PG13.5	5~9	20.4	15	27/24	100
PG16-LP	PG16	10~13	22.5	15	30/27	100
PG16-LP	PG16	7~12	22.5	15	30/27	100
PG19-LP	PG19	12~15	24	15	30/28	100
PG19-LP	PG19	10~12	24	15	30/28	100
PG21-LP	PG21	13~18	28.3	15	35/33	100
PG21-LP	PG21	9~16	28.3	15	35/33	100
PG25-LP	PG25	16~21	30	15	37/35	50
PG25-LP	PG25	13~18	30	15	37/35	50
PG29-LP	PG29	18~25	37	15	45/42	50
PG29-LP	PG29	13~20	37	15	45/42	50
PG36-LP	PG36	22~32	47	18	58/52	20
PG36-LP	PG36	20~26	47	18	58/52	20
PG42-LP	PG42	32~38	54	20	62/58	20
PG42-LP	PG42	25~31	54	20	62/58	20
PG48-LP	PG48	37~44	59.3	20	70/64	20
PG48-LP	PG48	29~35	59.3	20	70/64	20

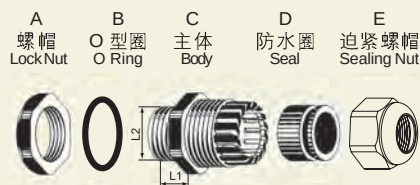

■ **产品材质:** A.C. E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。

■ **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。

■ **产品特性:** 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ **Material:** Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).


■ **Thread spec.:** Metric, PG, G, NPT.

■ **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.

■ **Characteristics:** Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

■ **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
M12-LP	M12x1.5	3~6.5	12	15	18/16	100
M12-LP	M12x1.5	2~5	12	15	18/16	100
M16-LP	M16x1.5	4~8	16	15	22/19	100
M16-LP	M16x1.5	2~6	16	15	22/19	100
M18-LP	M18x1.5	5~10	18	15	24/22	100
M18-LP	M18x1.5	3~7	18	15	24/22	100
M20-LP	M20x1.5	6~11	20	15	27/24	100
M20-LP	M20x1.5	5~9	20	15	27/24	100
M22-LP	M22x1.5	10~13	22	15	30/27	100
M22-LP	M22x1.5	7~12	22	15	30/27	100
M25-LP	M25x1.5	12~15	25	15	31/28	100
M25-LP	M25x1.5	10~12	25	15	31/28	100
M28-LP	M28x1.5	13~18	28	15	35/33	100
M28-LP	M28x1.5	9~16	28	15	35/33	100
M30-LP	M30x1.5	16~21	30	15	37/35	50
M30-LP	M30x1.5	13~18	30	15	37/35	50
M32-LP	M32x1.5	16~21	32	15	38/35	50
M32-LP	M32x1.5	13~18	32	15	38/35	50
M36-LP	M36x1.5	18~25	36	15	45/42	50
M36-LP	M36x1.5	13~20	36	15	45/42	50
M40-LP	M40x1.5	22~32	40	18	52/52	20
M40-LP	M40x1.5	20~26	40	18	52/52	20
M46-LP	M46x1.5	22~32	46	18	58/52	20
M46-LP	M46x1.5	20~26	46	18	58/52	20
M50-LP	M50x1.5	32~38	50	20	62/58	20
M50-LP	M50x1.5	25~31	50	20	62/58	20
M58-LP	M58x1.5	37~44	58	20	70/64	20
M58-LP	M58x1.5	29~35	58	20	70/64	20
M63-LP	M63x1.5	37~44	63	20	72/64	20
M63-LP	M63x1.5	29~35	63	20	72/64	20

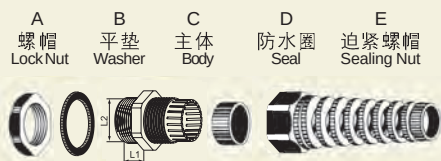

■ **产品材质:** A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。

■ **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。

■ **产品特性:** 特殊的夹紧爪与迫紧螺帽, 橡胶件设计, 可耐扭曲延长电缆寿命。夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ **Material:** Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).

■ **Thread spec.:** Metric, PG, G, NPT.

■ **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.


■ **Characteristics:** Special design of clamping die, sealing nut and rubber part, twisting resistance, prolonging cable life. Large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

■ **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.



产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
PG7-R	PG7	3~6.5	12.5	9	18/16	100
PG7-R	PG7	2~5	12.5	9	18/16	100
PG9-R	PG9	4~8	15.2	9	22/19	100
PG9-R	PG9	2~6	15.2	9	22/19	100
PG11-R	PG11	5~10	18.6	9	24/22	100
PG11-R	PG11	3~7	18.6	9	24/22	100
PG13.5-R	PG13.5	6~12	20.4	10	27/24	50
PG13.5-R	PG13.5	5~9	20.4	10	27/24	50
PG16-R	PG16	10~14	22.5	10	30/27	50
PG16-R	PG16	7~12	22.5	10	30/27	50
PG21-R	PG21	13~18	28.3	12	35/33	50
PG21-R	PG21	9~16	28.3	12	35/33	50

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
M12-R	M12x1.5	3~6.5	12	9	18/16	100
M12-R	M12x1.5	2~5	12	9	18/16	100
M16-R	M16x1.5	4~8	16	9	22/19	100
M16-R	M16x1.5	2~6	16	9	22/19	100
M18-R	M18x1.5	5~10	18	9	24/22	100
M18-R	M18x1.5	3~7	18	9	24/22	100
M20-R	M20x1.5	6~12	20	10	27/24	50
M20-R	M20x1.5	5~9	20	10	27/24	50
M22-R	M22x1.5	10~14	22	10	30/27	50
M22-R	M22x1.5	7~12	22	10	30/27	50
M25-R	M25x1.5	13~18	25	12	35/33	50
M25-R	M25x1.5	9~16	25	12	35/33	50
M27-R	M27x1.5	13~18	27	12	35/33	50
M27-R	M27x1.5	9~16	27	12	35/33	50

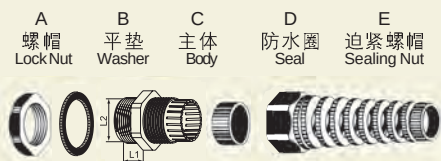

■ **产品材质:** A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。

■ **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。

■ **产品特性:** 特殊的夹紧爪与迫紧螺帽, 橡胶件设计, 可耐扭曲延长电缆寿命。夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ **Material:** Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).

■ **Thread spec.:** Metric, PG, G, NPT.

■ **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.


■ **Characteristics:** Special design of clamping die, sealing nut and rubber part, twisting resistance, prolonging cable life. Large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

■ **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.



产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
PG7-LR	PG7	3~6.5	12.5	15	18/16	100
PG7-LR	PG7	2~5	12.5	15	18/16	100
PG9-LR	PG9	4~8	15.2	15	22/19	100
PG9-LR	PG9	2~6	15.2	15	22/19	100
PG11-LR	PG11	5~10	18.6	15	24/22	100
PG11-LR	PG11	3~7	18.6	15	24/22	100
PG13.5-LR	PG13.5	6~12	20.4	15	27/24	50
PG13.5-LR	PG13.5	5~9	20.4	15	27/24	50
PG16-LR	PG16	10~14	22.5	15	30/27	50
PG16-LR	PG16	7~12	22.5	15	30/27	50
PG21-LR	PG21	13~18	28.3	15	35/33	50
PG21-LR	PG21	9~16	28.3	15	35/33	50

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
M12-LR	M12x1.5	3~6.5	12	15	18/16	100
M12-LR	M12x1.5	2~5	12	15	18/16	100
M16-LR	M16x1.5	4~8	16	15	22/19	100
M16-LR	M16x1.5	2~6	16	15	22/19	100
M18-LR	M18x1.5	5~10	18	15	24/22	100
M18-LR	M18x1.5	3~7	18	15	24/22	100
M20-LR	M20x1.5	6~12	20	15	27/24	50
M20-LR	M20x1.5	5~9	20	15	27/24	50
M22-LR	M22x1.5	10~14	22	15	30/27	50
M22-LR	M22x1.5	7~12	22	15	30/27	50
M25-LR	M25x1.5	13~18	25	15	35/33	50
M25-LR	M25x1.5	9~16	25	15	35/33	50
M27-LR	M27x1.5	13~18	27	15	35/33	50
M27-LR	M27x1.5	9~16	27	15	35/33	50

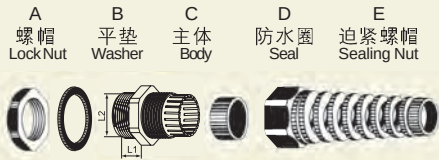

■ **产品材质:** A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。

■ **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。

■ **产品特性:** 特殊的夹紧爪与迫紧螺帽, 橡胶件设计, 可耐扭曲延长电缆寿命。夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ **Material:** Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).

■ **Thread spec.:** Metric, PG, G, NPT.


■ **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.

■ **Characteristics:** Special design of clamping die, sealing nut and rubber part, twisting resistance, prolonging cable life. Large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

■ **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
NPT3/8" -R	NPT3/8"	6~10	17.1	15	22/22	50
NPT3/8" -R	NPT3/8"	4~8	17.1	15	22/22	50
NPT1/2" -R	NPT1/2"	8~14	21.3	15	27/27	50
NPT1/2" -R	NPT1/2"	6~11	21.3	15	27/27	50
NPT3/4" -R	NPT3/4"	12~18	26.6	15	33/33	50
NPT3/4" -R	NPT3/4"	10~16	26.6	15	33/33	50


产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
G1/4-R	G1/4	4.5~8	13.1	9	19/19	50
G1/4-R	G1/4	3~5.3	13.1	9	19/19	50
G3/8-R	G3/8	6~10	16.6	10	22/22	50
G3/8-R	G3/8	4~7	16.6	10	22/22	50
G1/2-R	G1/2	9~14	20.9	10	27/27	50
G1/2-R	G1/2	6~11	20.9	10	27/27	50
G3/4-R	G3/4	13~18	26.4	12	33/33	50
G3/4-R	G3/4	10~16	26.4	12	33/33	50

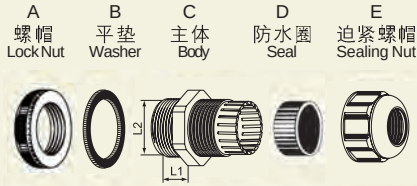

- **产品材质:** A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。
- **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
- **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。
- **产品特性:** 特殊的夹爪与迫紧螺帽, 橡胶件设计, 适合振动机械使用。夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。
- **颜色种类:** 黑色(RAL9005), 浅灰(RAL7035), 银色(RAL7001), 特殊颜色可定做。

- **Material:** Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).
- **Thread spec.:** Metric, PG, G, NPT.
- **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.
- **Characteristics:** Special design of clamping die, sealing nut and rubber part, applicable for vibrating machine. Large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.
- **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
PG7-S	PG7	3~6.5	12.5	11	19/16	100
PG7-S	PG7	2~5	12.5	11	19/16	100
PG9-S	PG9	4~8	15.2	11	22/19	100
PG9-S	PG9	2~6	15.2	11	22/19	100
PG11-S	PG11	5~10	18.6	12	24/22	100
PG11-S	PG11	3~7	18.6	12	24/22	100
PG13.5-S	PG13.5	6~11	20.4	13	26/24	100
PG13.5-S	PG13.5	5~9	20.4	13	26/24	100
PG16-S	PG16	10~13	22.5	13	30/27	100
PG16-S	PG16	7~12	22.5	13	30/27	100
PG19-S	PG19	12~15	24	15	33/32	100
PG19-S	PG19	10~12	24	15	33/32	100
PG21-S	PG21	13~18	28.3	16	36/33	100
PG21-S	PG21	9~16	28.3	16	36/33	100
PG25-S	PG25	16~21	30	16	37/35	50
PG25-S	PG25	13~18	30	16	37/35	50
PG29-S	PG29	18~25	37	16	46/42	50
PG29-S	PG29	13~20	37	16	46/42	50
PG36-S	PG36	22~32	47	17	56/53	20
PG36-S	PG36	20~26	47	17	56/53	20
PG42-S	PG42	32~38	54	17	65/60	20
PG42-S	PG42	25~31	54	17	65/60	20
PG48-S	PG48	37~44	59.3	18	70/68	20
PG48-S	PG48	29~35	59.3	18	70/68	20

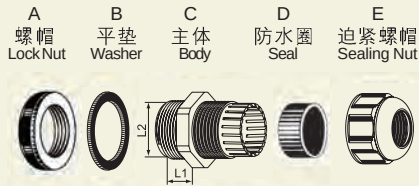


- **产品材质:** A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。
- **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
- **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。
- **产品特性:** 特殊的夹紧爪与迫紧螺帽, 橡胶件设计, 适合振动机械使用。夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。
- **颜色种类:** 黑色(RAL9005), 浅灰(RAL7035), 银色(RAL7001), 特殊颜色可定做。

- **Material:** Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).
- **Thread spec.:** Metric, PG, G, NPT.
- **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.
- **Characteristics:** Special design of clamping die, sealing nut and rubber part, applicable for vibrating machine. Large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.
- **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
M12-S	M12x1.5	3~6.5	12	11	19/16	100
M12-S	M12x1.5	2~5	12	11	19/16	100
M16-S	M16x1.5	4~8	16	11	22/19	100
M16-S	M16x1.5	2~6	16	11	22/19	100
M18-S	M18x1.5	5~10	18	12	24/22	100
M18-S	M18x1.5	3~7	18	12	24/22	100
M20-S	M20x1.5	6~11	20	13	26/24	100
M20-S	M20x1.5	5~9	20	13	26/24	100
M22-S	M22x1.5	10~13	22	13	30/27	100
M22-S	M22x1.5	7~12	22	13	30/27	100
M25-S	M25x1.5	12~15	25	15	33/32	100
M25-S	M25x1.5	10~12	25	15	33/32	100
M28-S	M28x1.5	13~18	28	16	36/33	100
M28-S	M28x1.5	9~16	28	16	36/33	100
M30-S	M30x1.5	16~21	30	16	37/35	50
M30-S	M30x1.5	13~18	30	16	37/35	50
M32-S	M32x1.5	16~21	32	16	38/35	50
M32-S	M32x1.5	13~18	32	16	38/35	50
M36-S	M36x1.5	18~25	36	16	46/42	50
M36-S	M36x1.5	13~20	36	16	46/42	50
M40-S	M40x1.5	22~32	40	17	53/53	20
M40-S	M40x1.5	20~26	40	17	53/53	20
M46-S	M46x1.5	22~32	46	17	56/53	20
M46-S	M46x1.5	20~26	46	17	56/53	20
M50-S	M50x1.5	32~38	50	17	65/60	20
M50-S	M50x1.5	25~31	50	17	65/60	20
M58-S	M58x1.5	37~44	58	18	68/68	20
M58-S	M58x1.5	29~35	58	18	68/68	20
M63-S	M63x1.5	37~44	63	18	70/68	20
M63-S	M63x1.5	29~35	63	18	70/68	20

A 螺帽 Lock Nut
B 平垫 Washer
C 主体 Body
D 防水圈 Seal
E 铁圈 Iron Washer
F 迫紧螺帽 Sealing Nut



■ **产品材质:** A.C.F 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶, E 部位采用铁皮。

■ **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。

■ **产品特性:** 特殊的夹紧爪与迫紧螺帽, 橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ **Material:** Parts A, C, F are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR), and part E are made of iron sheet.

■ **Thread spec.:** Metric, PG, G, NPT.


■ **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.

■ **Characteristics:** Special design of clamping die, sealing nut rubber part, large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

■ **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & F (mm)	数量 / 袋 Qty/bag
PGL7	PG7	5~7	12.5	8	19/13	100
PGL7	PG7	3~5	12.5	8	19/13	100
PGL9	PG9	5~9	15.2	8	22/16	100
PGL9	PG9	3~6	15.2	8	22/16	100
PGL11	PG11	7~11	18.6	8	24/19	100
PGL11	PG11	5~8	18.6	8	24/19	100
PGL13.5	PG13.5	8~12	20.4	9	26/21	100
PGL13.5	PG13.5	6~9	20.4	9	26/21	100
PGL16	PG16	11~15	22.5	11	30/23	100
PGL16	PG16	7~12	22.5	11	30/23	100
PGL19	PG19	12~18	24	11	33/29	100
PGL19	PG19	7~13	24	11	33/29	100
PGL21	PG21	15~20	28.3	11	36/30	100
PGL21	PG21	11~16	28.3	11	36/30	100
PGL25	PG25	18~25	30	11	37/35	50
PGL25	PG25	15~22	30	11	37/35	50
PGL29	PG29	22~27	37	11	46/40	50
PGL29	PG29	17~22	37	11	46/40	50
PGL36	PG36	26~33	47	13	56/50	20
PGL36	PG36	20~27	47	13	56/50	20
PGL42	PG42	30~38	54	14	65/55	20
PGL42	PG42	23~31	54	14	65/55	20
PGL48	PG48	40~44	59.3	14	70/60	20
PGL48	PG48	32~36	59.3	14	70/60	20

A 螺帽 Lock Nut
B 平垫 Washer
C 主体 Body
D 防水圈 Seal
E 铁圈 Iron Washer
F 迫紧螺帽 Sealing Nut



■ **产品材质:** A.C.F 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶, E 部位采用铁皮。

■ **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。

■ **产品特性:** 特殊的夹紧爪与迫紧螺帽, 橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ **Material:** Parts A, C, F are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR), and part E are made of iron sheet.


■ **Thread spec.:** Metric, PG, G, NPT.

■ **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.

■ **Characteristics:** Special design of clamping die, sealing nut rubber part, large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

■ **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & F (mm)	数量 / 袋 Qty/bag
ML12	M12x1.5	5~7	12	8	19/13	100
ML12	M12x1.5	3~5	12	8	19/13	100
ML16	M16x1.5	5~9	16	8	22/16	100
ML16	M16x1.5	3~6	16	8	22/16	100
ML18	M18x1.5	7~11	18	8	24/19	100
ML18	M18x1.5	5~8	18	8	24/19	100
ML20	M20x1.5	8~12	20	9	26/21	100
ML20	M20x1.5	6~9	20	9	26/21	100
ML22	M22x1.5	11~15	22	11	30/23	100
ML22	M22x1.5	7~12	22	11	30/23	100
ML25	M25x1.5	12~18	25	11	33/29	100
ML25	M25x1.5	7~13	25	11	33/29	100
ML28	M28x1.5	15~20	28	11	36/30	100
ML28	M28x1.5	11~16	28	11	36/30	100
ML30	M30x1.5	18~25	30	11	37/35	50
ML30	M30x1.5	15~22	30	11	37/35	50
ML32	M32x1.5	18~25	32	11	37/35	50
ML32	M32x1.5	15~22	32	11	37/35	50
ML36	M36x1.5	22~27	36	11	46/40	50
ML36	M36x1.5	17~22	36	11	46/40	50
ML40	M40x1.5	26~33	40	13	52/50	20
ML40	M40x1.5	20~27	40	13	52/50	20
ML46	M46x1.5	26~33	46	13	56/50	20
ML46	M46x1.5	20~27	46	13	56/50	20
ML50	M50x1.5	30~38	50	14	65/55	20
ML50	M50x1.5	23~31	50	14	65/55	20
ML63	M63x1.5	40~44	63	14	70/60	20
ML63	M63x1.5	32~36	63	14	70/60	20

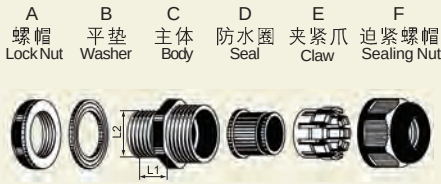

■ **产品材质:** A.C.E.F部位采用UL认可的尼龙PA66, B.D 部位采用丁腈橡胶。

■ **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。

■ **产品特性:** 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ **Material:** Parts A, C, E, F are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).

■ **Thread spec.:** Metric, PG, G, NPT.


■ **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.

■ **Characteristics:** Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

■ **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.



产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & F (mm)	数量 / 袋 Qty/bag
PG7A	PG7	4.5~8	12.5	9	18/19	100
PG7A	PG7	3~5.3	12.5	9	18/19	100
PG9A	PG9	6~10	15.2	15	22/22	100
PG9A	PG9	4~7	15.2	15	22/22	100
PG11A	PG11	7~12	18.6	15	24/22	100
PG11A	PG11	5~10	18.6	15	24/22	100
PG13.5A	PG13.5	9~14	20.4	15	27/27	100
PG13.5A	PG13.5	6~11	20.4	15	27/27	100
PG16A	PG16	13~18	22.5	15	33/33	100
PG16A	PG16	10~16	22.5	15	33/33	100
PG21A	PG21	18~25	28.3	15	41/41	20
PG21A	PG21	15~22	28.3	15	41/41	20
PG29A	PG29	24~30	37	20	50/50	20
PG29A	PG29	20~25	37	20	50/50	20
PG36A	PG36	31~41	47	22	60/62	20
PG36A	PG36	26~32	47	22	60/62	20
PG42A	PG42	36~45	54	22	64/62	20
PG42A	PG42	30~35	54	22	64/62	20
PG48A	PG48	44~51	59.3	25	75/75	20
PG48A	PG48	40~46	59.3	25	75/75	20

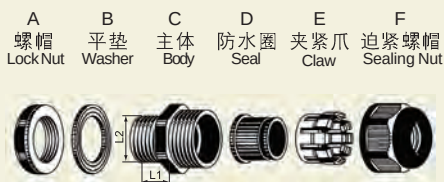

■ **产品材质:** A.C.E.F部位采用UL认可的尼龙PA66, B.D部位采用丁腈橡胶。

■ **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ **工作温度:** 静态-40℃至100℃, 瞬时耐热至120℃, 动态-20℃至80℃, 瞬间耐热至100℃。

■ **产品特性:** 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ **Material:** Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).

■ **Thread spec.:** Metric, PG, G, NPT.

■ **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.


■ **Characteristics:** Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

■ **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.



产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & F (mm)	数量 / 袋 Qty/bag
MG12A	M12x1.5	4.5~8	12	9	18/19	100
MG12A	M12x1.5	3~5.3	12	9	18/19	100
MG16A	M16x1.5	6~10	16	15	22/22	100
MG16A	M16x1.5	4~7	16	15	22/22	100
MG20A	M20x1.5	9~14	20	15	27/27	100
MG20A	M20x1.5	6~11	20	15	27/27	100
MG25A	M25x1.5	13~18	25	15	33/33	100
MG25A	M25x1.5	10~16	25	15	33/33	100
MG32A	M32x1.5	18~25	32	15	41/41	20
MG32A	M32x1.5	15~22	32	15	41/41	20
MG40A	M40x1.5	24~30	40	20	50/50	20
MG40A	M40x1.5	20~25	40	20	50/50	20
MG50A	M50x1.5	31~41	50	22	60/62	20
MG50A	M50x1.5	26~32	50	22	60/62	20
MG63A	M63x1.5	44~51	63	25	75/75	20
MG63A	M63x1.5	40~46	63	25	75/75	20
MG90A	M90x2	66~77	90	25	110/110	5
MG90A	M90x2	58~68	90	25	110/110	5

A 螺帽 Lock Nut
B 平垫 Washer
C 主体 Body
D 防水圈 Seal
E 迫紧螺帽 Sealing Nut



■ 产品材质: A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。

■ 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ 工作温度: 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。

■ 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ 颜色种类: 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ Material: Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).

■ Thread spec.: Metric, PG, G, NPT.


■ Working temperature: -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.

■ Characteristics: Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

■ Color: Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
PG7B	PG7	4~6.8	12.5	8	17/15	100
PG7B	PG7	3~5.5	12.5	8	17/15	100
PG9B	PG9	4.5~8	15.2	9	22/19	100
PG9B	PG9	3~5.5	15.2	9	22/19	100
PG11B	PG11	6~10	18.6	9	24/22	100
PG11B	PG11	4~7	18.6	9	24/22	100
PG13.5B	PG13.5	7~12.5	20.4	10	27/24	100
PG13.5B	PG13.5	5~9	20.4	10	27/24	100
PG16B	PG16	8.5~14	22.5	10	30/27	100
PG16B	PG16	7~11	22.5	10	30/27	100
PG21B	PG21	14~18	28.3	12	36/33	100
PG21B	PG21	12~16	28.3	12	36/33	100
PG29B	PG29	18~25	37	15	46/42	50
PG29B	PG29	16~22	37	15	46/42	50
PG36B	PG36	24~32	47	15	57/52	20
PG36B	PG36	21~26	47	15	57/52	20
PG42B	PG42	31~41	54	16	64/62	20
PG42B	PG42	26~32	54	16	64/62	20
PG48B	PG48	35~45	59.3	16	70/65	20
PG48B	PG48	30~38	59.3	16	70/65	20

A 螺帽 Lock Nut
B 平垫 Washer
C 主体 Body
D 防水圈 Seal
E 迫紧螺帽 Sealing Nut



■ 产品材质: A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。

■ 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ 工作温度: 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。

■ 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ 颜色种类: 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ Material: Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).


■ Thread spec.: Metric, PG, G, NPT.

■ Working temperature: -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.

■ Characteristics: Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

■ Color: Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
M12B	M12x1.5	4~6.8	12	8	17/15	100
M12B	M12x1.5	3~5.5	12	8	17/15	100
M16B	M16x1.5	4.5~8	16	9	22/19	100
M16B	M16x1.5	3~5.5	16	9	22/19	100
M18B	M18x1.5	6~10	18	9	24/22	100
M18B	M18x1.5	4~7	18	9	24/22	100
M20B	M20x1.5	7~12.5	20	10	27/24	100
M20B	M20x1.5	5~9	20	10	27/24	100
M22B	M22x1.5	8.5~14	22	10	30/27	100
M22B	M22x1.5	7~11	22	10	30/27	100
M28B	M28x1.5	14~18	28	12	36/33	100
M28B	M28x1.5	12~16	28	12	36/33	100
M36B	M36x1.5	18~25	36	15	46/42	50
M36B	M36x1.5	16~22	36	15	46/42	50
M46B	M46x1.5	24~32	46	15	57/52	20
M46B	M46x1.5	21~26	46	15	57/52	20
M50B	M50x1.5	31~41	50	16	64/62	20
M50B	M50x1.5	26~32	50	16	64/62	20
M58B	M58x1.5	35~45	58	16	70/65	20
M58B	M58x1.5	30~38	58	16	70/65	20

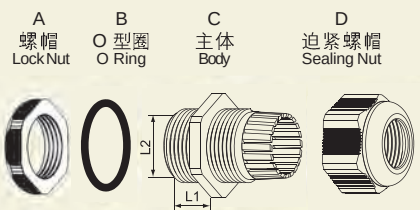

■ **产品材质:** A.C.D 部位采用 UL 认可的尼龙 PA66, B 部位采用丁腈橡胶。

■ **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。

■ **产品特性:** 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

■ **Material:** Parts A, C, D are made of UL approved nylon PA66, parts B are made of nitrile butadiene rubber (NBR).

■ **Thread spec.:** Metric, PG, G, NPT.


■ **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.

■ **Characteristics:** Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

■ **Color:** Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
PG7-ST	PG7	5~8	12.5	9	18/16	100
PG9-ST	PG9	6~9	15.2	9	22/19	100
PG11-ST	PG11	9~12	18.6	9	24/22	100
PG13.5-ST	PG13.5	10~14	20.4	9	27/23	100
PG16-ST	PG16	12~16	22.5	10	30/27	100

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
M12-ST	M12x1.5	5~8	12	9	18/16	100
M16-ST	M16x1.5	6~9	16	9	22/19	100
M18-ST	M18x1.5	9~12	18	9	24/22	100
M20-ST	M20x1.5	10~14	20	9	27/23	100
M22-ST	M22x1.5	12~16	22	10	30/27	100




- 材料: 采用 UL 认可的尼龙 PA66
- O-密封件: 丁腈橡胶
- 工作温度: -40℃至 100℃
- 颜色种类: 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

- Material: Made of UL approved nylon PA66.
- O-sealing element: Made of nitrile butadiene rubber (NBR).
- Working temperature: -40℃to100℃.
- Color: Black(RAL9005), light grey (RAL7035), silver(RAL7001) as well as special colors that can be designed at request.



产品型号 Model	螺纹规格 Thread Size	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	主体尺寸 Main body Dimensions L (mm)	盖帽尺寸 Cover Dimensions D (mm)
PG7-T	PG7	12.5	8.5	12.5	15
PG9-T	PG9	15.2	8.5	13	19
PG11-T	PG11	18.6	9	13	22
PG13.5-T	PG13.5	20.4	9	13	25
PG16-T	PG16	22.5	10.5	15	27
PG21-T	PG21	28.3	10.5	15.5	33
PG29-T	PG29	37	11.5	16	44
PG36-T	PG36	47	13.5	18	55
PG42-T	PG42	54	13.5	18.5	62
PG48-T	PG48	59.3	14.5	19.5	68

产品型号 Model	螺纹规格 Thread Size	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	主体尺寸 Main body Dimensions L (mm)	盖帽尺寸 Cover Dimensions D (mm)
M12-T	M12x1.5	12	8.5	12.5	15
M16-T	M16x1.5	16	8.5	13	19
M18-T	M18x1.5	18	9	13	22
M20-T	M20x1.5	20	9	13	25
M22-T	M22x1.5	22	10.5	15	27
M25-T	M25x1.5	25	10.5	15.5	29
M27-T	M27x1.5	27	10.5	15.5	33
M28-T	M28x1.5	28	10.5	15.5	33
M32-T	M32x1.5	32	10.5	16	38
M40-T	M40x1.5	40	11.5	18	46
M50-T	M50x1.5	50	13.5	18	56
M63-T	M63x1.5	63	14	19	68

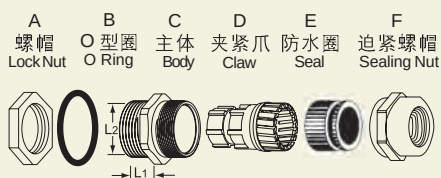

■ **产品材质:** A.C.F 部位采用黄铜镀镍, D 部位采用 UL 认可的尼龙 PA66, B.E 部位采用丁腈橡胶。

■ **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ **工作温度:** -40℃ 至 100℃, 瞬时耐热至 120℃。


■ **产品特性:** 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ **Material:** Parts A, C, F are made of brass plated with nickel, part D is made of UL approved nylon PA66, parts B and E are made of nitrile butadiene rubber (NBR).

■ **Thread spec.:** Metric, PG, G, NPT.

■ **Working temperature:** -40℃ to 100℃, instantaneous heat resistance up to 120℃.


■ **Characteristics:** Special design of clamping die and rubber part, large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.



产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size (mm)
PG7-M	PG7	3~6.5	12.5	6	14
PG7-M	PG7	2~5	12.5	6	14
PG9-M	PG9	4~8	15.2	7	18
PG9-M	PG9	2~6	15.2	7	18
PG11-M	PG11	5~10	18.6	7	20
PG11-M	PG11	3~7	18.6	7	20
PG13.5-M	PG13.5	6~12	20.4	7.5	22
PG13.5-M	PG13.5	5~9	20.4	7.5	22
PG16-M	PG16	10~14	22.5	7.5	24
PG16-M	PG16	6~12	22.5	7.5	24
PG21-M	PG21	13~18	28.3	8	30
PG21-M	PG21	9~16	28.3	8	30
PG29-M	PG29	18~25	37	9	40
PG29-M	PG29	13~20	37	9	40
PG36-M	PG36	22~33	47	9	50
PG36-M	PG36	20~26	47	9	50
PG42-M	PG42	32~38	54	10	57
PG42-M	PG42	25~31	54	10	57
PG48-M	PG48	37~44	59.3	11	64
PG48-M	PG48	29~35	59.3	11	64

25 Metallic fixed cable gland M-M type


CE SGS IP68

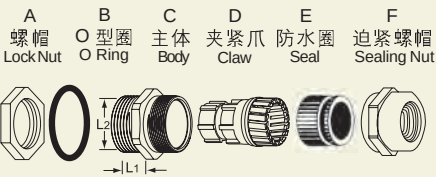

- 产品材质: A.C.F 部位采用黄铜镀镍, D 部位采用 UL 认可的尼龙 PA66, B.E 部位采用丁腈橡胶。
 - 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
 - 工作温度: -40℃ 至 100℃, 瞬时耐热至 120℃。
 - 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。
- Material: Parts A, C, F are made of brass plated with nickel, part D is made of UL approved nylon PA66, parts B and E are made of nitrile butadiene rubber (NBR).
 - Thread spec.: Metric, PG, G, NPT.
 - Working temperature: -40℃ to 100℃, instantaneous heat resistance up to 120℃.
 - Characteristics: Special design of clamping die and rubber part, large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.




产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size (mm)
M12-M	M12x1.5	3~6.5	12	6	14
M14-M	M14x1.5	3~6.5	14	6	17
M16-M	M16x1.5	4~8	16	7	18
M18-M	M18x1.5	5~10	18	7	20
M20-M	M20x1.5	6~12	20	7.5	22
M22-M	M22x1.5	10~14	22	7.5	24
M24-M	M24x1.5	10~14	24	8	30
M25-M	M25x1.5	10~14	25	9	30
M27-M	M27x1.5(2)	13~18	27	9	30
M30-M	M30x1.5(2)	13~18	30	10	36
M32-M	M32x1.5(2)	15~22	32	10	36
M33-M	M33x1.5(2)	15~22	33	10	36
M36-M	M36x1.5(2)	18~25	36	10	42
M40-M	M40x1.5(2)	18~25	40	10	50
M42-M	M42x1.5(2)	22~30	42	10	50
M48-M	M48x1.5(2)	25~33	48	10	52
M50-M	M50x1.5(2)	32~38	50	10	57
M54-M	M54x1.5(2)	32~38	54	10	57
M60-M	M60x1.5(2)	37~44	60	11	64
M63-M	M63x1.5(2)	37~44	63	11	68
M64-M	M64x1.5(2)	37~44	64	11	68

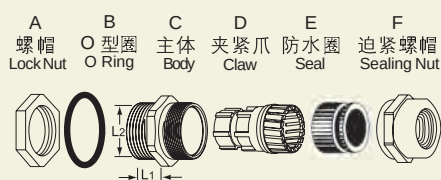


- **产品材质:** A.C.F部位采用黄铜镀镍, D部位采用UL认可的尼龙PA66, B.E部位采用丁腈橡胶。
- **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
- **工作温度:** -40℃至100℃, 瞬时耐热至120℃。
- **产品特性:** 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

- **Material:** Parts A, C, F are made of brass plated with nickel, part D is made of UL approved nylon PA66, parts B and E are made of nitrile butadiene rubber (NBR).
- **Thread spec.:** Metric, PG, G, NPT.
- **Working temperature:** -40℃ to 100℃, instantaneous heat resistance up to 120℃.
- **Characteristics:** Special design of clamping die and rubber part, large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.



产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size (mm)
PG7-LM	PG7	3~6.5	12.5	10	14
PG7-LM	PG7	2~5	12.5	10	14
PG9-LM	PG9	4~8	15.2	10	17
PG9-LM	PG9	2~6	15.2	10	17
PG11-LM	PG11	5~10	18.6	10	20
PG11-LM	PG11	3~7	18.6	10	20
PG13.5-LM	PG13.5	6~12	20.4	10	22
PG13.5-LM	PG13.5	5~9	20.4	10	22
PG16-LM	PG16	10~14	22.5	10	24
PG16-LM	PG16	6~12	22.5	10	24
PG21-LM	PG21	13~18	28.3	12	30
PG21-LM	PG21	9~16	28.3	12	30
PG29-LM	PG29	18~25	37	12	40
PG29-LM	PG29	13~20	37	12	40
PG36-LM	PG36	22~32	47	15	50
PG36-LM	PG36	20~26	47	15	50
PG42-LM	PG42	32~38	54	15	57
PG42-LM	PG42	25~31	54	15	57
PG48-LM	PG48	37~44	59.3	15	64
PG48-LM	PG48	29~35	59.3	15	64

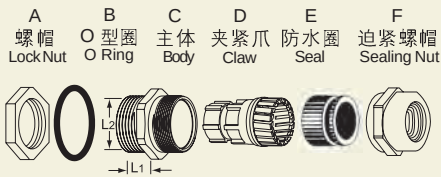

■ **产品材质:** A.C.F部位采用黄铜镀镍, D部位采用UL认可的尼龙PA66, B.E部位采用丁腈橡胶。

■ **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ **工作温度:** -40℃至100℃, 瞬时耐热至120℃。

■ **产品特性:** 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ **Material:** Parts A, C, F are made of brass plated with nickel, part D is made of UL approved nylon PA66, parts B and E are made of nitrile butadiene rubber (NBR).


■ **Thread spec.:** Metric, PG, G, NPT.

■ **Working temperature:** -40℃ to 100℃, instantaneous heat resistance up to 120℃.

■ **Characteristics:** Special design of clamping die and rubber part, large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.



产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size (mm)
M12-LM	M12x1.5	3~6.5	12	10	14
M14-LM	M14x1.5	3~6.5	14	10	17
M16-LM	M16x1.5	4~8	16	10	18
M18-LM	M18x1.5	5~10	18	10	20
M20-LM	M20x1.5	6~12	20	10	22
M22-LM	M22x1.5	10~14	22	10	24
M24-LM	M24x1.5	10~14	24	11	30
M25-LM	M25x1.5	10~14	25	12	30
M27-LM	M27x1.5(2)	13~18	27	12	30
M30-LM	M30x1.5(2)	13~18	30	14	36
M32-LM	M32x1.5(2)	15~22	32	14	36
M33-LM	M33x1.5(2)	15~22	33	14	36
M36-LM	M36x1.5(2)	18~25	36	14	42
M40-LM	M40x1.5(2)	18~25	40	15	50
M42-LM	M42x1.5(2)	22~30	42	15	50
M48-LM	M48x1.5(2)	25~33	48	15	52
M50-LM	M50x1.5(2)	32~38	50	15	57
M54-LM	M54x1.5(2)	32~38	54	15	57
M60-LM	M60x1.5(2)	37~44	60	15	64
M63-LM	M63x1.5(2)	37~44	63	15	68
M64-LM	M64x1.5(2)	37~44	64	15	68

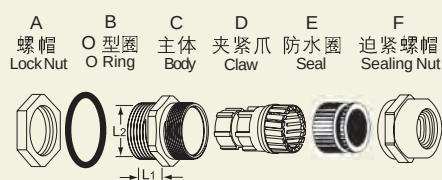

■ 产品材质: A.C.F部位采用黄铜镀镍, D部位采用UL认可的尼龙PA66, B.E部位采用丁腈橡胶。

■ 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ 工作温度: -40℃至100℃, 瞬时耐热至120℃。


■ 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ Material: Parts A, C, F are made of brass plated with nickel, part D is made of UL approved nylon PA66, parts B and E are made of nitrile butadiene rubber (NBR).


■ Thread spec.: Metric, PG, G, NPT.

■ Working temperature: -40℃ to 100℃, instantaneous heat resistance up to 120℃.

■ Characteristics: Special design of clamping die and rubber part, large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.



产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size (mm)
NPT3/8" -M	NPT3/8"	4~8	17.1	15	18
NPT3/8" -M	NPT3/8"	2~6	17.1	15	18
NPT1/2" -M	NPT1/2"	6~12	21.3	13	22
NPT1/2" -M	NPT1/2"	5~9	21.3	13	22
NPT3/4" -M	NPT3/4"	13~18	26.6	15	30
NPT3/4" -M	NPT3/4"	9~16	26.6	15	30
NPT1" -M	NPT1"	18~25	33.5	16	40
NPT1" -M	NPT1"	13~20	33.5	16	40
NPT1 1/4" -M	NPT1 1/4"	22~33	42	18	50
NPT1 1/4" -M	NPT1 1/4"	18~25	42	18	50
NPT1 1/2" -M	NPT1 1/2"	32~38	48	15	57
NPT1 1/2" -M	NPT1 1/2"	20~26	48	15	57

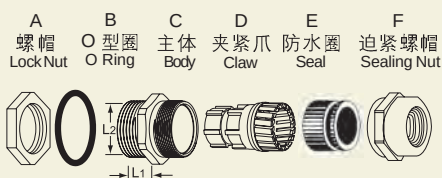

■ 产品材质: A.C.F 部位采用黄铜镀镍, D 部位采用 UL 认可的尼龙 PA66, B.E 部位采用丁腈橡胶。

■ 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ 工作温度: -40℃ 至 100℃, 瞬时耐热至 120℃。


■ 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ Material: Parts A, C, F are made of brass plated with nickel, part D is made of UL approved nylon PA66, parts B and E are made of nitrile butadiene rubber (NBR).


■ Thread spec.: Metric, PG, G, NPT.

■ Working temperature: -40℃ to 100℃, instantaneous heat resistance up to 120℃.

■ Characteristics: Special design of clamping die and rubber part, large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.



产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size (mm)
G1/4" -M	G1/4"	3~6.5	13.1	8	14
G1/4" -M	G1/4"	2~5	13.1	8	14
G3/8" -M	G3/8"	4~8	16.6	15	18
G3/8" -M	G3/8"	2~6	16.6	15	18
G1/2" -M	G1/2"	6~12	20.9	13	22
G1/2" -M	G1/2"	5~9	20.9	13	22
G3/4" -M	G3/4"	13~18	26.4	15	30
G3/4" -M	G3/4"	9~16	26.4	15	30
G1" -M	G1"	18~25	33.2	15	40
G1" -M	G1"	13~20	33.2	15	40
G1 1/4" -M	G1 1/4"	18~25	41.9	15	50
G1 1/4" -M	G1 1/4"	13~20	41.9	15	50
G1 1/2" -M	G1 1/2"	22~32	48	15	57
G1 1/2" -M	G1 1/2"	20~26	48	15	57
G2" -M	G2"	37~44	60	15	64
G2" -M	G2"	29~34	60	15	64



- 材料: 黄铜镀镍
- O-密封件: 丁腈橡胶
- 工作温度: -40℃至100℃

- Material: Made of brass plated with nickel.
- O-sealing element: Made of nitrile butadiene rubber (NBR).
- Working temperature: -40℃to100℃.

产品型号 Model	螺纹规格 Thread Size	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	主体尺寸 Main body Dimensions L (mm)	盖帽尺寸 Cover Dimensions D (mm)
PG7-TM	PG7	12.5	5	8	14
PG9-TM	PG9	15.2	6	9	17
PG11-TM	PG11	18.6	6	9	20
PG13.5-TM	PG13.5	20.4	6.5	9.5	22
PG16-TM	PG16	22.5	6.5	9.5	24
PG21-TM	PG21	28.3	7	11	30
PG29-TM	PG29	37	8	12	39
PG36-TM	PG36	47	9	15	50
PG42-TM	PG42	54	10	16	57
PG48-TM	PG48	59.3	10	16	64

产品型号 Model	螺纹规格 Thread Size	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	主体尺寸 Main body Dimensions L (mm)	盖帽尺寸 Cover Dimensions D (mm)
M12-TM	M12x1.5	12	5	8	14
M16-TM	M16x1.5	16	6	9	18
M18-TM	M18x1.5	18	6	9	20
M20-TM	M20x1.5	20	6.5	9.5	22
M22-TM	M22x1.5	22	6.5	9.5	24
M25-TM	M25x1.5	25	7	11	28
M32-TM	M32x1.5	32	8	12	35
M40-TM	M40x1.5	40	9	15	44
M50-TM	M50x1.5	50	10	16	54
M63-TM	M63x1.5	63	10	16	70