OpenView

IP67 HD IR Bullet Network Camera

The OpenView Series HD bullet camera is designed for outdoor installation for its heat dissipation. The efficient all-in-one design makes an easier installation with ultra-stable performance. The OpenView is the perfect solution for the harsh outdoor environment.

Key Features

- High Definition up to 5M
- IP67 and Vandal-Resistant Housing
- Easily Lens Adjustment
- Broad-Band Anti-Refection Optical Glass Window
- Privacy Mask
- Motion Detection
- Region of Interest
- Super Wide Dynamic Range

- IP67 Design and a Wide Temperature Range

The high level of IP67 and outdoor design strengthen the reliability of OpenView series under harsh outdoor environment

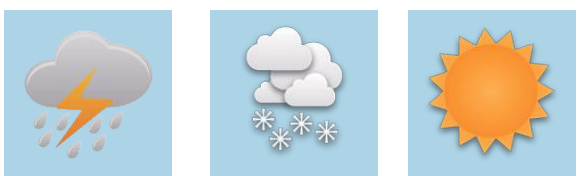

- Smart Focus System

To make an easier installation, Openview series uses a stepper motor lens, to make sure the installer can remotely control the focal length and focus accurately by adjusting the interface

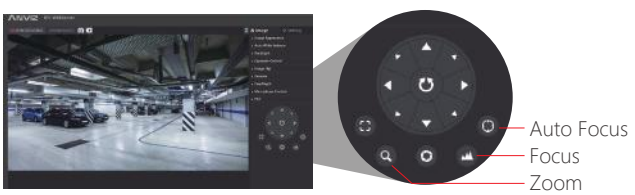

- Intelligent Infrared Technology

Built-in multi-angle infrared lights can automatically match with various focal length to ensure a perfect fill light

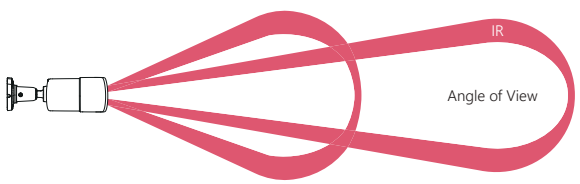

- Quick Install

With one screw to fix the rotation of all angles, the installation of the bullet camera is easier for users

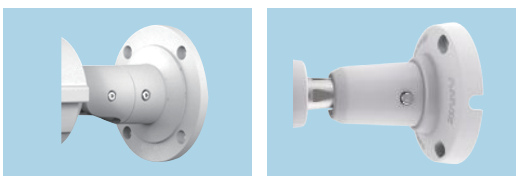

Ordinary Camera OpenView

ONVIF

ANVIZ
Intelligent . Security

Technical Specifications

Type	OP1408-IE	OP2508-IRE	OP2708-IRE
Resolution	1 Megapixel	2 Megapixel	4 Megapixel
Image Sensor	1/3" CMOS	1/2.8" CMOS	1/3" CMOS
Shutter Time	1/3s-1/10,000s	1/3s-1/10,000s	1/3s-1/10,000s
Frame rate	50HZ: 25fps(1280×720) 60HZ: 30fps(1280×720)	50HZ: 25fps(1920×1080) 60HZ: 30fps(1920×1080)	50HZ: 20fps(2560×1440) 60HZ: 20fps(2560×1440)
Minimun Illumination	0.1 Lux (Color) / 0.01 Lux(B/W)	0.01 Lux (Color) / 0.001 Lux(B/W)	
SN Ratio	>54dB		
Lens	2.8-12mm/F1.4 Φ14 / P-Iris(-Z Model)		
Horizontal Angle of View	27°- 92°		
Focus	Support auto focus, remote zoom（Optional）		

Anviz Model (Example:OP1408-IE)

OP	1	4	08	I	E
Model (OpenView)	Version	Resolution (1MP)	Lens (Vari Focus<=3X)	Built-in LED	PoE

Build-to-Order Options

Z	Motorized Lens
R	WDR

Data Transmission	Transfer Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS
	Interface Protocol	ONVIF
	Multistream	Support main stream and sub stream
Compression	Video Compression	H.264/MJPEG
	H.264 Code Type	BaseLine Profile / Main Profile / High Profile
	Compression Output Bitrate	32 Kbps~8Mbps
	Audio Compression	G.711(64Kbps)
Image	Image Settings	Rotate Mode(mirror, flip), Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
	Day/Night	IR-CUT
	BLC	Support
	WDR	Support
	DNR	3D DNR
	Privacy Mask	Support maximum 4 areas in one picture, various colors available
Smart Function (Optional)	Smart Detection	Motion detection, intrusion detection, cross-border detection, entrance detection, leaving detection, objects left detection, objects taken detection, audio anomaly detection, video mask detection
	Image Enhancement	Support defog, HSBLC, Anti Shake DSP
	Smart Encoding	Support low delay rate, ROI
	Alarm Trigger	Network disconnect, IP address conflict, Storage exception, Illeigal access

IR	IR Range	50-70m
	IR Control	Intelligently adjust the IR brightness and angle according to scene
Interface	Ethernet	RJ-45 (10/100/1000Base-T)
	Audio	1 line in/1 line out
	Alarm	1 in/1 out
	SD Card	Built-in SD card slot, supports Micro SD / SDHC / SDXC card (up to 64G)
General	Operating Conditions	-30°C to 60°C (-22°F to 140°F)
	Power Supply	DC12V/PoE(802.3af)
	Power Consumption	MAX 12W
	Protection	IP67 ESD 6000V Lightning Protection, anti-surge
	Weight	1066g (2.35pounds)
	Dimensions	Φ96*269mm (Φ3.8"*10.6")
	Safety Certifications	CE, FCC, RoHS

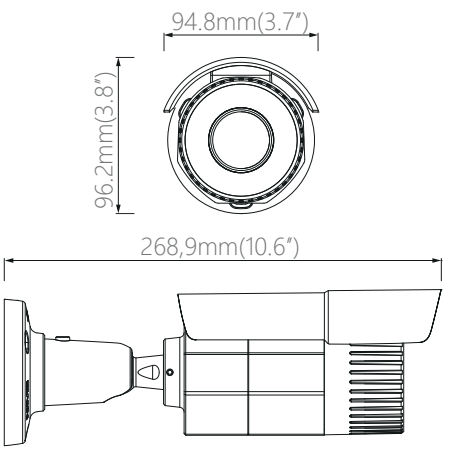

2016 © Anviz Global. All Rights Reserved. Due to the consistent improving of the product, this specification and appearance is subject to change without notice.