


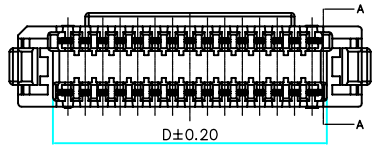


REVISION		
REV.	DESCRIPTION	DATE

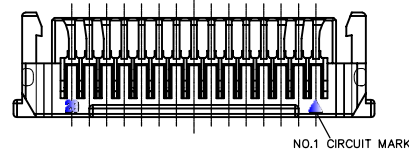


SPECIFICATION

- . Voltage Rating : 50V AC/DC
- . Current Rating : 1A AC/DC
- . Withstanding Voltage : 1,000AC/minute
- . Insulation Resistance : 1,000MΩ min
- . Temperature Range : -25°C to +85°C
- . Contact Resistance : 20mΩ max

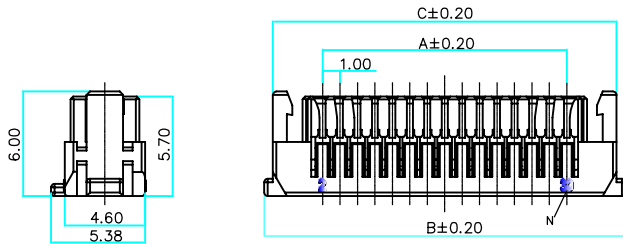

HOUSING

- . Part No : 100G3-HXX
- . Poles : 20&30&40&50
- . Material : PBT UL94V-0
- . Q'ty : 1'000pcs/Bag

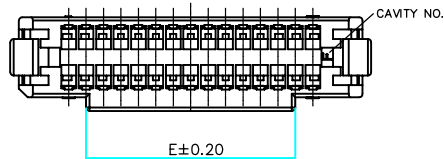

Poles	Part No.	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
20	100G3-H10x2	9.0	15.7	14.7	10.7	7.0
30	100G3-H15x2	14.0	20.7	19.7	15.7	12.0
40	100G3-H20x2	19.0	25.7	24.7	20.7	17.0
50	100G3-H25x2	24.0	30.7	29.7	25.7	22.0

GENERAL DIMENSION TOLERANCE	
	UNITS: mm

DRAWN BY:	Storm.Li	Customer:		THIRD ANGLE PROJECTION
CHECKED BY:	Simmon Zhang	Title:	Housing	
APPROVED BY:	Tony Chou	P/N0:	100G3-HXX	