
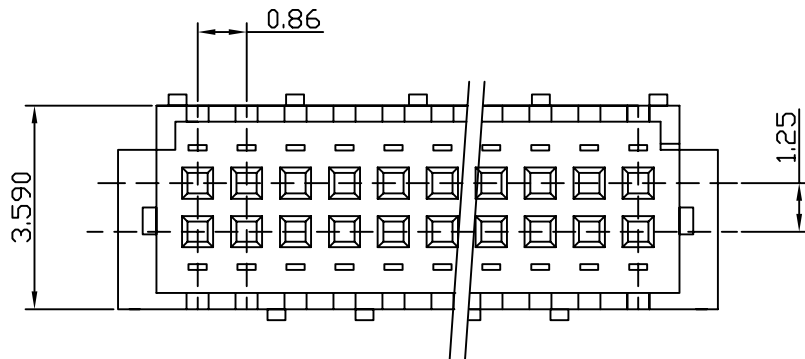


Material: Nylon 66 UL94V-0
 Accept 125G2-TP (GP)Terminal
 Mate with 125G2-2M(V)Series header
 Current Rating: 1A AC, DC
 Voltage Rating: 100V AC/ max.
 Contact Resistance: 20mΩ / max.
 Insulation Resistance: 500MΩ / min.
 Dielectric Withstanding Voltage: 500V AC/ min.
 Operating Temp.: -25°C ~ +85°C



Poles	Part No.	Dimension mm (in.)	
		A	B
10	125G2-2H10	8.00	5.00
20	125G2-2H20	14.25	11.25
30	125G2-2H30	20.50	17.50
40	125G2-2H40	26.75	23.75

Rev	Description/Date	Drawn By: Storm.li	Customer:	Third angle projection	 X.± .X±0.30 .XX±0.15 .XXX±0.08	
△		Checked By: Simmon	Part No.: 125G2-2HXX	General Dimension Tolerance		Units: mm
△		Approved By: Tony	Title: Housing			
SGS Report No.: CE/2005/91479A						