
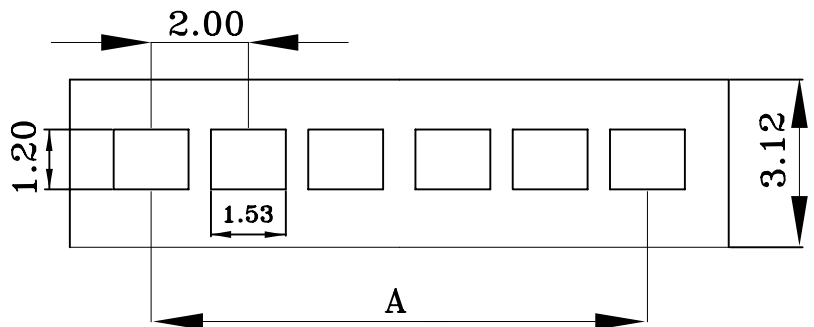
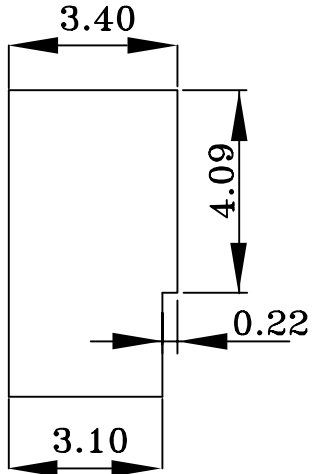
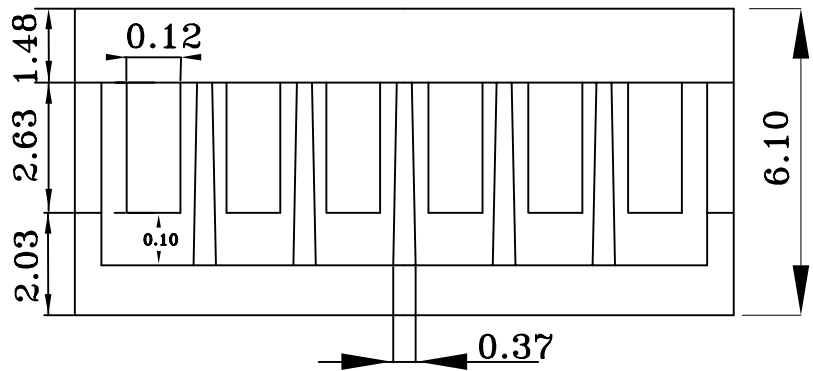


Material: PBT UL94V-0
 Accept : 200B1-T Terminal
 Current rating:2A AC,DC
 Voltage Rating:250V ACDC
 Contact resistance:20mΩMax
 Insulation resistance:1000MΩMin
 Withstanding voltage :800V AC/Minute
 Temperature range:-25°C to +85°C
 PC Board hole: 0.8mm Dia
 PC Board thickness: 1.2 to 1.6 mm



Poles	Part No.	Dimensions(mm)	
		A	B
2	200B1-H02	5.20	2.00
3	200B1-H03	7.20	4.00
4	200B1-H04	9.20	6.00
5	200B1-H05	11.20	8.00
6	200B1-H06	13.20	10.00
7	200B1-H07	15.20	12.00
8	200B1-H08	17.20	14.00
9	200B1-H09	19.20	16.00
10	200B1-H10	21.20	18.00
11	200B1-H11	23.20	20.00
12	200B1-H12	25.20	22.00
13	200B1-H13	27.20	24.00
14	200B1-H14	29.20	26.00
15	200B1-H15	31.20	28.00

Rev	Description/Date	Drawn By: Storm.li	Customer:	Third angle projection	 X.± .X±0.30 .XX±0.20 .XXX±0.10
△		Checked By:Simmon	Part No.: 200B1-HXX	General Dimension Tolerance	
△		Approved By: Tony	Title: 2.00mm pitch Housing		
SGS Report No.:					