
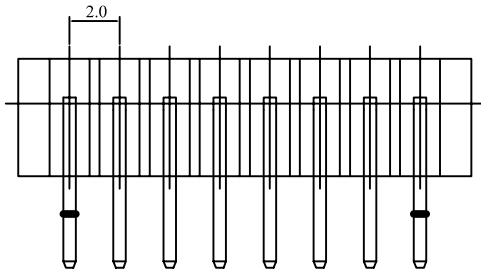



Materials: Nylon66 UL94V-0
 Pin Brass Tin-plated
 Mate with:200G1-HXX Series housing
 Current rating: 2A AC,DC
 Voltage rating: 100V AC,DC
 Contact resistance:20mΩ Max
 Insulation resistance:1000MΩ Min
 Withstanding voltage: 800V AC/Minute
 Temperature range: -25°C to +85 °C
 SQ Pin size:0.5 mm
 PC Board hole:0.8mm Dia
 PC Board thickness:0.8 to 1.6 mm

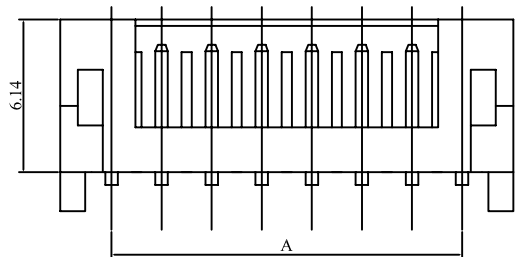

Poles	Part No.	Dimension mm (in.)	
		A	B
2	200G1-R02	2.0(0.079)	6.04(0.237)
3	200G1-R03	4.0(0.157)	8.04(0.316)
4	200G1-R04	6.0(0.236)	10.04(0.395)
5	200G1-R05	8.0(0.315)	12.04(0.473)
6	200G1-R06	10.0(0.394)	14.06(0.473)
7	200G1-R07	12.0(0.472)	16.06(0.631)
8	200G1-R08	14.0(0.551)	18.08(0.711)
9	200G1-R09	16.0(0.630)	20.08(0.790)
10	200G1-R10	18.0(0.709)	22.10(0.870)
11	200G1-R11	20.0(0.787)	24.10(0.949)
12	200G1-R12	22.0(0.886)	26.12(1.027)
13	200G1-R13	24.0(0.945)	28.12(1.106)
14	200G1-R14	26.0(1.024)	30.14(1.203)
15	200G1-R15	28.0(1.102)	32.14(1.283)

Rev	Description/Date	Drawn By: Storm.li	Customer:	Third angle projection		X.± .X±0.30 .XX±0.20 .XXX±0.10
△		Checked By:Simmon	Part No.:			
△		Approved By: Tony	Title:	2.00mm pitch 90° Wafer		
SGS Report No.:CE/2005/53726D						