


PORTS	DIM	"B" ±0.15	"A" ±0.25	"C" ±0.10
2X2		25.4	31.24	13.97
2X4		53.34	59.18	41.91
2X6		81.28	87.12	69.85

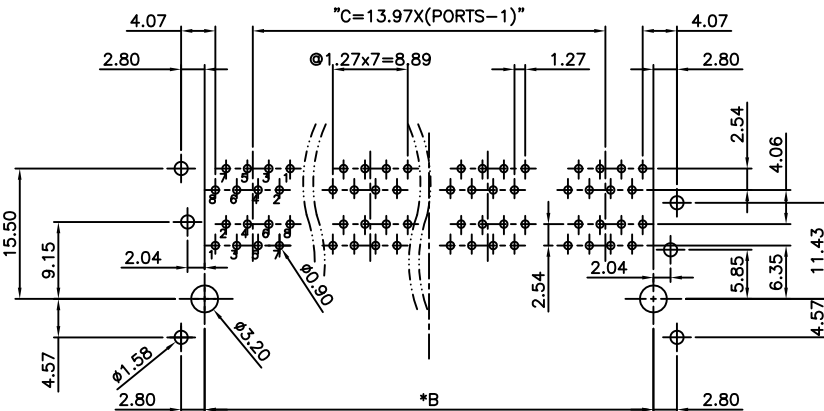

PC Board Layout Component Side Shown

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLYESTER OR HIGH TEMP. UL94V-0.
INSERT MATERIAL : GLASS FILLED POLYESTER BK. UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE, t=0.35mm.
- SHIELD MATERIAL : COPPER ALLOY, t=0.25mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: -0°C TO +70°C.
MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PRODUCT NUMBER:
210A-2X C 0 X-R
1 2 3

- No. of Contact
22:2X2 Port
24:2X4 Port
26:2X6 Port
28:2X8 Port
- Contact Plating
C:5u" Gold Plating
- EMI Tab
A:w/ EMI Tab
B:w/o EMI Tab

	Add Dimension	2014/11/27	
	Initial Release	2012/08/03	
REV.	DESCRIPTION	DATE	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANGLES	ANG.	±5°	
LINEAR	0.	±0.3	
	0.0	±0.25	
	0.00	±0.20	
SCALE	AS SHOWN	UNIT: mm	
DRAWN Fros		2014/11/27	DRAWN NAME: RJ45 Jack Shielded Type
		2014/11/27	
CHECKED Ron		2014/11/27	PRODUCT NO. 210A-2 X C 0 X-R
APPROVED Ken		2014/11/27	
	SIZE A4	SHEET 1/1	FILE NAME 210A-2XC0X-R_B_2



www.attend.com.tw