
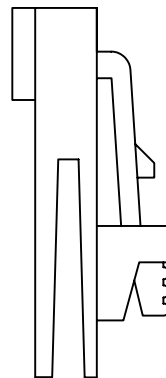


254G4-HXXL Series

- * Poles:2-25
 - * Material:PBT UL94V-0 ,BLACK
 - * Suitable 254G4-T series terminal
- #### Specifications
- * Current rating: 2.5A AC, DC
 - * Voltage rating: 250V AC, DC
 - * Temperature range: -25°C~+85°C
 - * Insulation resistance: 1,000MΩ min.
 - * Withstand voltage: 800V AC/minute

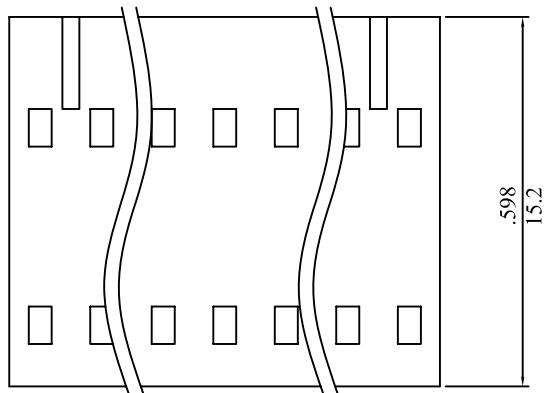

CIRCUITS	PART NO.	DIMENSION in.(mm)	
		A	B
2	254G4-H02L	0.100(2.54)	0.205(5.2)
3	254G4-H03L	0.200(5.08)	0.307(7.8)
4	254G4-H04L	0.300(7.62)	0.406(10.3)
5	254G4-H05L	0.400(10.16)	0.508(12.9)
6	254G4-H06L	0.500(12.70)	0.606(15.4)
7	254G4-H07L	0.600(15.24)	0.709(18.0)
8	254G4-H08L	0.700(17.78)	0.807(20.5)
9	254G4-H09L	0.800(20.32)	0.909(23.1)
10	254G4-H10L	0.900(22.86)	1.008(25.6)
11	254G4-H11L	1.000(25.40)	1.106(28.1)
12	254G4-H12L	1.100(27.94)	1.209(30.7)
13	254G4-H13L	1.200(30.48)	1.307(33.2)
14	254G4-H14L	1.300(33.02)	1.409(35.8)
15	254G4-H15L	1.400(35.54)	1.508(38.3)
16	254G4-H16L	1.500(38.10)	1.610(40.9)
17	254G4-H17L	1.600(40.64)	1.709(43.4)
18	254G4-H18L	1.700(43.18)	1.811(46.0)
19	254G4-H19L	1.800(45.72)	1.909(48.5)
20	254G4-H20L	1.900(48.26)	2.012(51.1)
21	254G4-H21L	2.000(50.80)	2.110(53.6)
22	254G4-H22L	2.100(53.34)	2.213(56.2)
23	254G4-H23L	2.200(55.88)	2.311(58.7)
24	254G4-H24L	2.300(58.42)	2.409(61.2)
25	254G4-H25L	2.400(60.96)	2.512(63.8)

Rev	Description/Date	Drawn By: Storm.li	Customer:	Third angle projection		Units: Inches/mm	
△		Checked By:Simmon	Part No.:	254G4-HXXL		TOLERANCE X.XX±0.10 X.X ±0.25	ANGLE TOLERANCE±
△		Approved By: Tony	Title:	.100"(2.54mm) pitch FFC/FPC Housing Connectors			
SGS Report No.:							