


### SPECIFICATIONS


Current Rating: 3A AC, DC  
 Temperature Range: -40°C to +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1000V AC/minute  
 Material: PBT+30%G.F, UL94V-0

### ORDER INFORMATION

5 H 2 2 1 7 N 0 - 1 X X X B L 0 0 M 0 1




PIN	Dim. A	Dim. B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
12	27.94	30.48
15	35.56	38.10
18	43.18	45.72
20	48.26	50.80

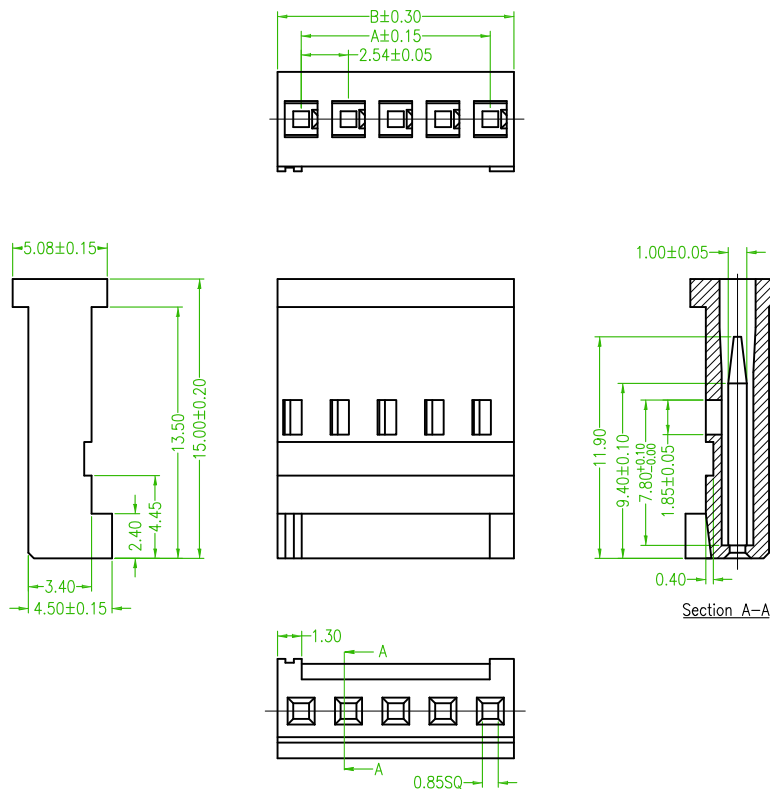

Old Part No.: 2217H-1XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm HOUSING			頁數 Page	1/1
	品號 PART NO.	5H2217N0-1XXXBL00M01			繪圖 DRAWN	Jeff 2016/08/30
	圖號 DRAWING NO.	版本 REV.	A	核對 CHECKED	Johnny 2016/08/30	
	客戶品號 CUSTOMER P/N	比例 SCALE	None	承認 APPROVED	Aaron 2016/08/30	
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	