

SWITCH CIRCUIT

MATERIAL AND FINISH AS BELOW

WHEN CARD IS EJECTED

WHEN CARD IS INSERTED

A	Housing	LCP UL94V-0 Black	E	
B	Contact	Phosphor Bronze C5210, Contact Area: Gold Flash	F	
C	Latch	Stainless Steel SUS301	G	
D			H	

NOTES:

DATE CODE 2202 (YWWDD)
 Y: 2 YEAR(2012)
 WW:20 WEEK(01~52)
 D: 2 DAY(01~07)

SPECIFICATION:

1. ELECTRICAL

- 1.1 Current Rating: 0.5A per pin
- 1.2 Voltage Rating: 25V AC/DC
- 1.3 Contact Resistance: 60mΩ
- 1.4 Insulation Resistance: 500MΩ
- 1.5 Dielectric Withstanding Voltage: 125VAC

2. MECHANICAL





- 2.1 Durability: 25 Cycle
- 2.2 Latch Retention Force: 8 N/Pos. Min

3. ENVIRONMENTAL

- 3.1 Operating temperature range: -40°C~+85°C
- 3.2 Storage temperature range: -40°C~+85°C

4. SOLDER ABILITY

- 4.1 Recommended IR Reflow Temperature: 255°C 10Sec

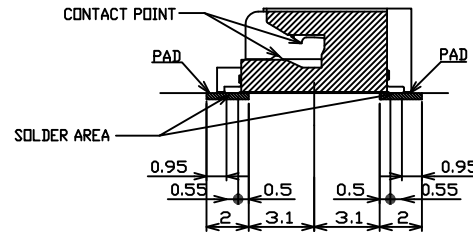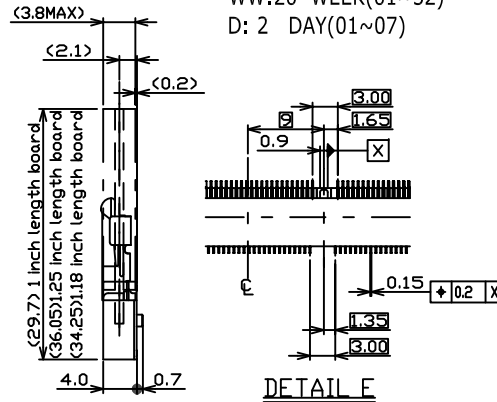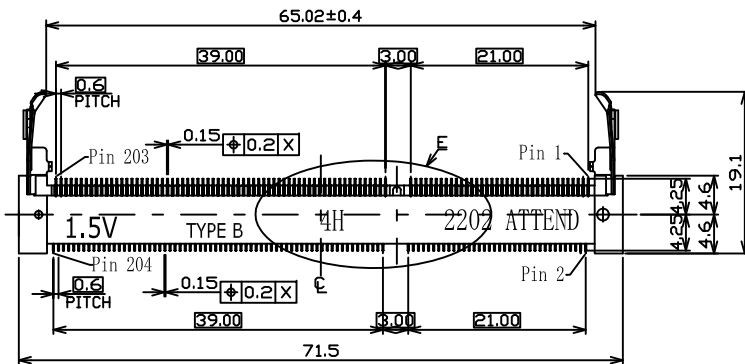

P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12
----	----	----	----	----	----	----	----	----	-----	-----	-----

PIN ASSIGNMENT

122A-40A10	SO DIMM DDR3 Socket 1.5V 204Pin Reverse Type 4.0H, Contact Area: Gold Flash
------------	---

PRODUCT NO.	DESCRIPTION
-------------	-------------

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20

SCALE AS SHOWN UNIT: mm

DRAWN Willis 2012/12/05

CHECKED Angel 2012/12/05

APPROVED Ken 2012/12/05



www.attend.com.tw

DRAWN NAME: SO DIMM DDR3 Socket 1.5V 204Pin 4.0H Reverse Type

PRODUCT NO. 122A-40A10


FILE NAME 122A-40A10_B_1

Revise:

Revise:

Revise:

REV. DESCRIPTION DATE REV. DESCRIPTION DATE

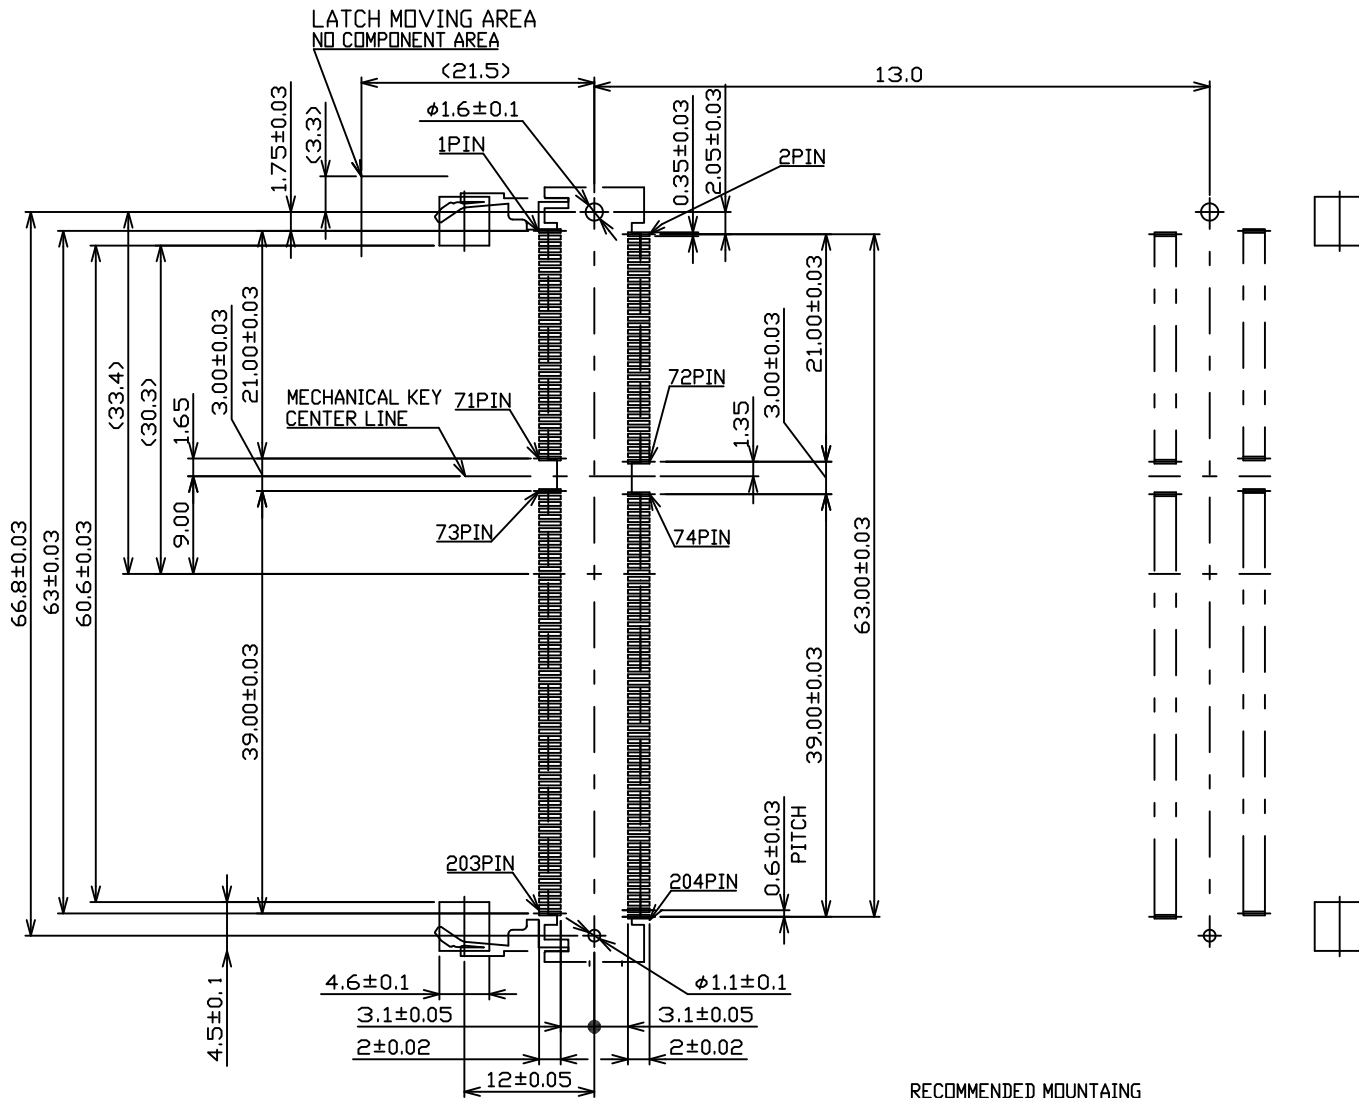

RECOMMENDED MOUNTING
P.C. BOARD PATTERN LAYOUT DIM.

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2012/12/05
CHECKED	Angel	2012/12/05
APPROVED	Ken	2012/12/05



www.attend.com.tw









DRAWN NAME:
SO DIMM DDR3 Socket
1.5V 204Pin 4.0H Reverse Type

PRODUCT NO. 122A-40A10

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE

SIZE A4 REV. 1.0

FILE NAME 122A-40A10_B_1

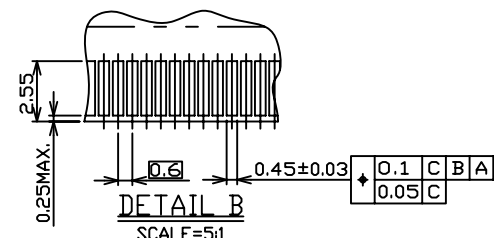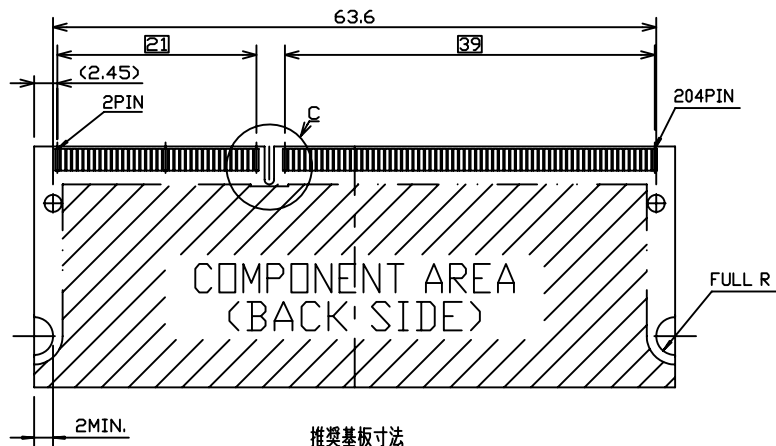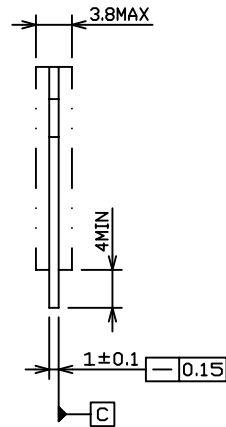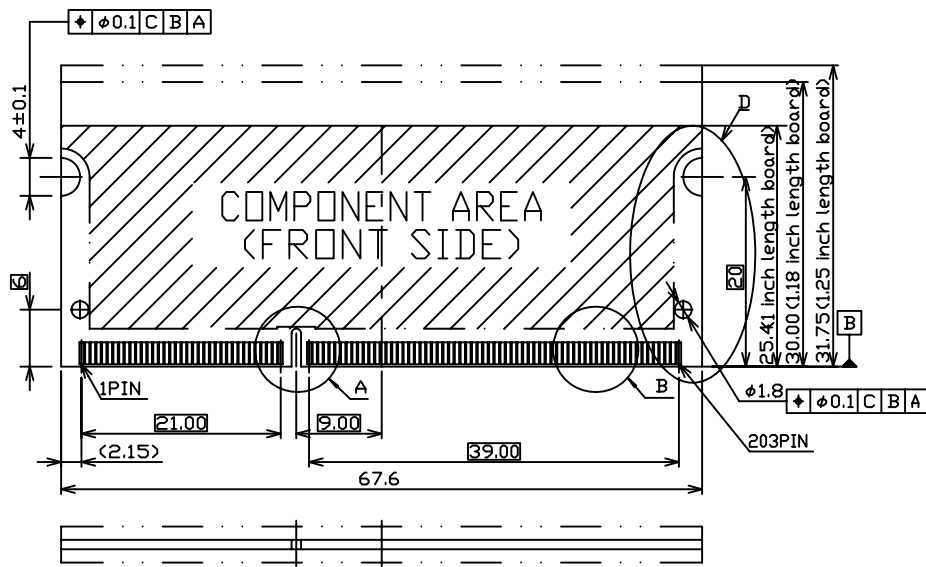

推薦基板寸法
RECOMMENDED MATING
P.C. BOARD DIM.

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2012/12/05
CHECKED	Angel	2012/12/05
APPROVED	Ken	2012/12/05




www.attend.com.tw

DRAWN NAME: SO DIMM DDR3 Socket
1.5V 204Pin 4.0H Reverse Type

PRODUCT NO. 122A-40A10


FILE NAME 122A-40A10_B_1

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE
1			1		
2			2		
3			3		
4			4		
5			5		
6			6		
7			7		



SIZE A4


REV. 1.0

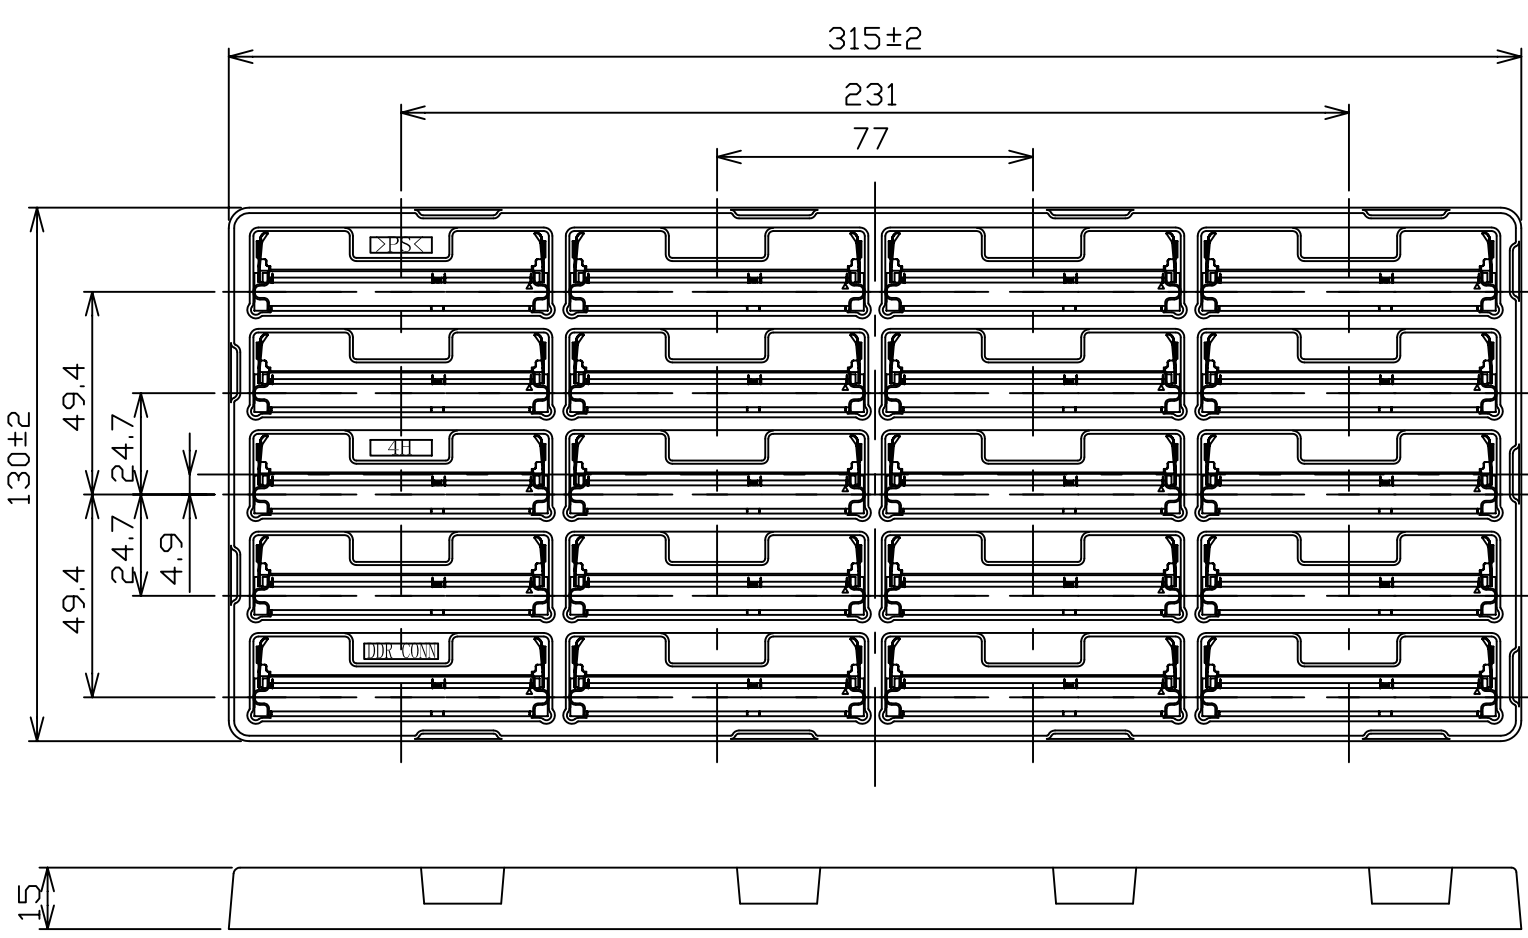

PACKAGING SPECIFICATION:

- 1. PACKING**
- 1.1 Quantity:**

 - 20Piece/Tray
 - 220Piece/Inner Carton
 - 660Piece/Outer Carton



SOFT TRAY PACKAGING

						UNLESS OTHERWISE SPECIFIED TOLERANCE			 www.attend.com.tw	
						ANGLES	ANG.	±5°		
						LINEAR	0.	±0.3		
							0.00	±0.25		
						SCALE	AS SHOWN	UNIT: mm		
						DRAWN	Willis	2012/12/05	DRAWN NAME: SO DIMM DDR3 Socket	
						CHECKED	Angel	2012/12/05	1.5V 204Pin 4.0H Reverse Type	
						APPROVED	Ken	2012/12/05	PRODUCT NO.	122A-40A10
REV.	DESCRIPTION		DATE	REV.	DESCRIPTION		DATE	SIZE	REV.	FILE NAME
1				4				A4	1.0	122A-40A10_D_1