


Industrial Ethernet Cable – Connection Cable, M12 D-Code, Male, 4pin, Shielding

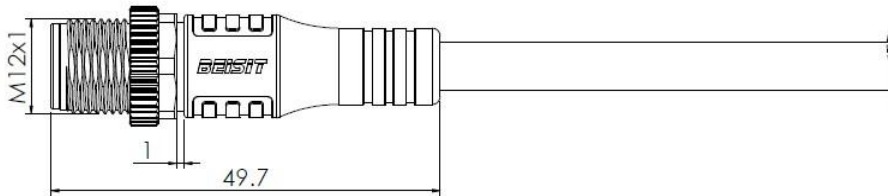

Typecode M12D04CZM1ZU010E31
ID 1006190000669

Technical Data*

Connector A	
Connector	M12, Male, D-Code, Straight
Number of pins	4
Contacts	Brass, Gold-plated
Coupling nut/screw	Zinc, Nickel-plated
Contact carriers	PA
Seal	No
Connector body	PUR, black
LED	No
Mechanical lifespan	≥ 100 Mating cycles
Protection class	IP67, Only in screwed condition
Locking mode	Screw, M12 x 1
Standard	IEC 61076-2


Cable	
Cable diameter	Ø 6.70 mm ± 0.30 mm
Cable length	5 m
Cable jacket	PUR, Green
Core insulation	PVC
Core cross-section	4 x 0.34 mm ²
Shielding	Yes
Core colors	1-YE, 2-WH, 3-OG, 4-BU

Electrical properties	
Connector rated voltage	250 V
Connector rated current	4 A
Overtoltage category	I
Pollution degree	II
Transport category	CAT 5E

Features

- M12×1 Male, 4Pin
- Cable jacket: Green, PUR
- Resistant to chemicals and oils
- Resistant to salt spray
- Resistance to welding sparks
- Resistant to abrasion
- Suitable for drag chain use
- Approval: CE
- RoHS-compliant
- Cable diameter: 5 m

Contact assignment



Technical Data*

Mechanical and chemical properties

Bending radius (stationary installation) 8 x OD

Bending radius (flexible use) 15 x OD

Bending cycles \geq 5 Mio.

Operation temperature

Ambient temperature range (stationary) -40 °C ... +80 °C


Ambient temperature range (in motion) -5 °C ... +80 °C

Commercial data

Country of origin CN

Packaging unit 1 pc

Connection diagram



* Please note that the data specified here were design data, and the parameters of product are subject to changes without prior notice. Matters not mentioned herein. Please contact customer service. Please also note that the user is responsible for validating functionality, conformity with applicable laws and directives, as well as for the electrical safety in the particular application.