


## Accessories for actuator/sensor receptacle – female flange with solder contacts, front-mounted

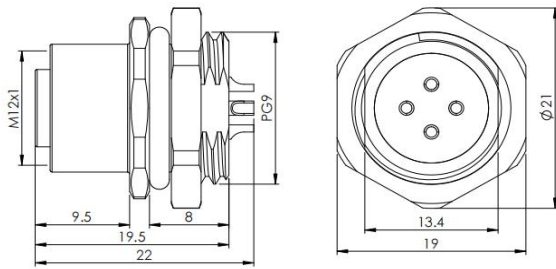

Typecode M12D04FBRF9SC011

ID 1006010000503

### Technical Data\*

| Connector A          |                                 |
|----------------------|---------------------------------|
| Connector            | M12, Female, D-Coding           |
| Number of Pins       | 4-Pin                           |
| Contacts             | Brass, Gold-plated              |
| Flange housing       | Brass, Nickel-plated            |
| Mounting type        | Front-mounted                   |
| Contact Carriers     | PA                              |
| Seal                 | FKM                             |
| Protection Class     | IP67, Only in screwed condition |
| Mechanical lifespan  | ≥ 100 Mating cycles             |
| Pollution degree     | 3                               |
| Screw-in thread      | PG9                             |
| Connection mode      | Solder contact                  |
| Wiring specification | 22 AWG                          |
| Standard             | IEC 61076-2-101                 |

| Electrical properties at +20 °C |          |
|---------------------------------|----------|
| Rated Voltage                   | 250 V    |
| Rated current                   | 4 A      |
| Rated impulse voltage           | 2.5 kV   |
| Contact resistance              | ≤ 3 mΩ   |
| Insulation resistance           | ≥ 100 MΩ |

### Mechanical and chemical properties

Ambient temperature range (stationary) -40 °C ... 120 °C

### Commercial data


|                   |      |
|-------------------|------|
| Weight            | g    |
| Country of origin | CN   |
| Packaging unit    | 1 pc |

\* Please note that the data specified here were design data, and the parameters of product are subject to changes without prior notice. Matters not mentioned herein. Please contact customer service. Please also note that the user is responsible for validating functionality, conformity with applicable laws and directives, as well as for the electrical safety in the particular application.

### Features

- M12, Female, 4-Pin
- Front-mounted
- Protection Class: IP67
- RoHS-compliant
- Metal housing
- Solder contact

### Contact assignment



### Through bore

