


Accessories for actuator/sensor flange – female with PCB, rear-mounted

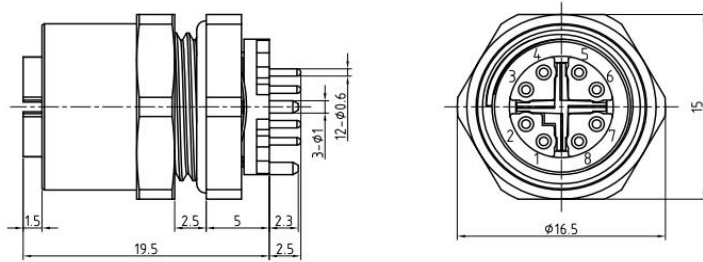

Typecode M12X08FBRB2P1011

ID 1006010000612

Technical Data*

Connector A	
Connector	M12, Female, X-Coding
Number of Pins	8-Pin
Contacts	Brass, Gold-plated
Flange housing	Brass, Nickel-plated
Contact Carriers	PA
Seal	NBR
Protection Class	IP67, Only in screwed condition
Mechanical lifespan	≥ 100 Mating cycles
Pollution degree	III
Locking mode	M12 x 1
Connection mode	PCB 180°
Screw-in thread	M12 x 1
Standard	RoHS

Electrical properties at +20 °C	
Rated Voltage	50VA.C (60V D.C)
Rated current	0.5 A
Rated impulse voltage	800 V
Contact resistance	≤ 10 mΩ
Insulation resistance	≥ 100 MΩ
transfer rate	10G bit/s

Mechanical and chemical properties	
Ambient temperature range (stationary)	-40 °C ... 85 °C


Commercial data	
Weight	20 g
Country of origin	CN
Packaging unit	1 pc

* Please note that the data specified here were design data, and the parameters of product are subject to changes without prior notice. Matters not mentioned herein. Please contact customer service. Please also note that the user is responsible for validating functionality, conformity with applicable laws and directives, as well as for the electrical safety in the particular application.


Features

- M12, Female, 8-Pin
- Protection Class: IP67
- PCB solder contact
- RoHS-compliant

Contact assignment



Through bore



PCB Layout

