


REV.	ECN NO.	DESCRIPTION	SIGN	DATE
D1	N/A	INITIAL DRAWING	Wu.Xi	2013/04/10

Table 1

Position No.	Connector Part No.	2 Housing Part No.	1 Contact		
			Contact Part No.	Q'ty	Contact Description
2	21002525-03	105-00034-00	301-00052-02	2	MZBPφ1.0
3	21003525-03	105-00039-00	301-00052-02	3	MZBPφ1.0
4	21004525-03	105-00047-00	301-00052-02	4	MZBPφ1.0
4	21004525-04	105-00045-00	301-00067-02	4	MZPφ0.8
5	21005525-03	105-00051-00	301-00067-02	5	MZPφ0.8
6	21006525-03	105-00055-00	301-00067-02	6	MZPφ0.8
2+4	21204525-03	105-00030-00	301-00052-02	2	MZBPφ1.0
			301-00067-02	4	MZPφ0.8
7	21007525-03	105-00059-00	301-00067-02	7	MZPφ0.8
8	21008525-03	105-00064-00	301-00067-02	8	MZPφ0.8

Table 2 (Hole Arrangement, Mating Face)

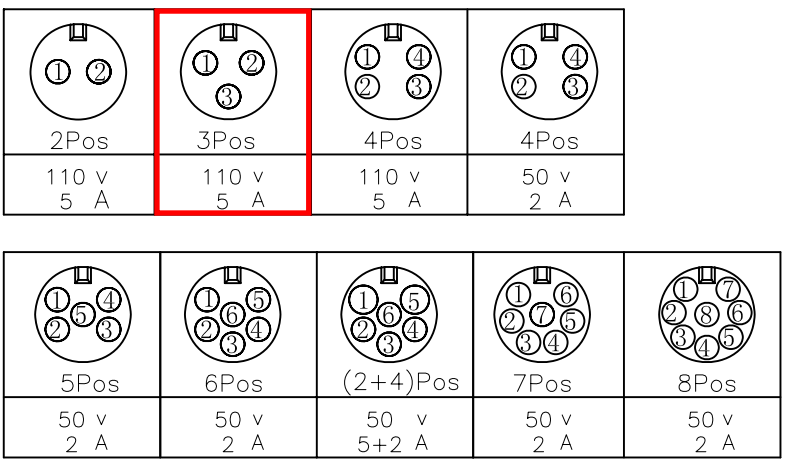

Specification:

- 1.Operation temperature: -45°C~105°C.
- 2.Insulation resistance: 100MΩ at DC500V.
- 3.Contact resistance: <10mΩ.
- 4.Waterproof: IP67.
- 5.RoHS compliant.
- 6.Mating Waterproof Cap P/N: 806-00027-00.
- 7.Mating Connector P/N: 21XXX221-XX or 21XXX223-XX-001 or 21XXX224-XX-001.

Material List				
No.	Material No.	Q'ty	Material Description	Remark
1	See above table 1		Contact	
2	See above table 1	1	Mini-XX Pos Housing	
3	112-00012-00	1	Mini Panel Nut	
4	503-00010-00	1	Mini Gasket	

PART NO	21XXX525-03(04)	DRAWN BY	Wu.Xi	DATE	2013-04-10
DWG NO		CHECKED BY		DATE	
CUSTOMER		APPROVED BY		DATE	

UNIT:mm		Description	Mini Series Lock Type, Rear Mount, Pin Solder
TOLERANCE	.X ±0.25 .XX ±0.15 .XXX ±0.05 ANGLES ±1°	SCALE: N/A	SHEET 1 OF 1
REV. D1	SIZE A4	* :Inspection Item	

**CHOGORI**

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.