
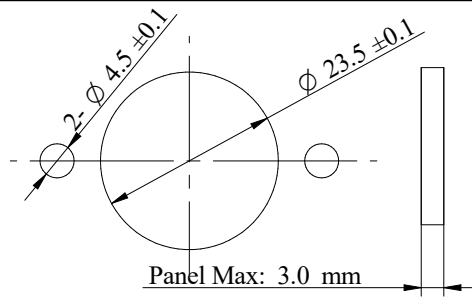

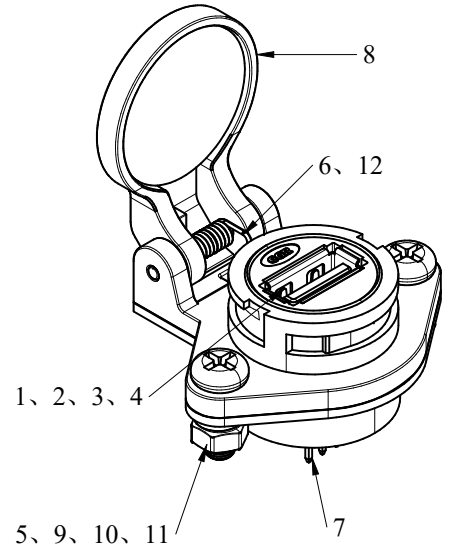
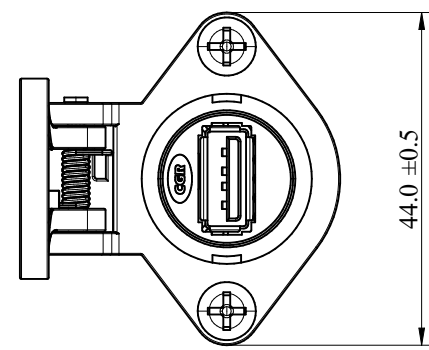


Wiring Specifications and Current Carrying Comparison Table				
Terminal Type	Wire Gauge	Wire Processing	Rated Current	Part No.
Signal	N/A	PCB	1.5A	N/A

CUSTOMER DRAWING

REV.	ECN&ECR No.	DESCRIPTION	DSN	DATE
C1	N/A	INITIAL DRAWING	麦宏发	2024/2/27

SPECIFICATION	
Rated Operating Voltage	30V AC
Rated Current	1.5A
Peak Current	N/A
Insulation Resistance	1000MΩ at 500V DC
Withstand Voltage	500V AC (Signal)
Durability	1500Cycles
IP Rating	Mated:IP67
Salt Spray	5%NaCl,48H
Flame Class	N/A
Operating Temperature	-40°C~+85°C
Environmental Requirements	RoHS&REACH
UV Resistance Grade	N/A
Recommended Screw & torque	N/A
Mating Part No.	34000000-02
Maximum Wiring Range	N/A

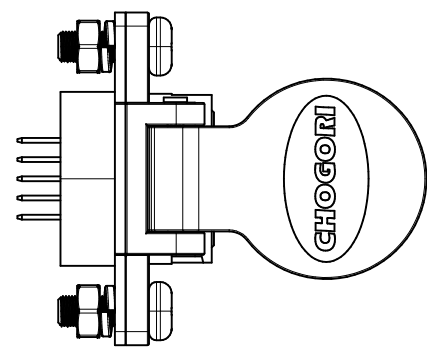

12	Spring	1	pcs	Stainless Steel
11	Spring Washer	2	pcs	Stainless Steel
10	Screw	2	pcs	Stainless Steel
9	Nut	2	pcs	Stainless Steel
8	Cap	1	pcs	Plastic
7	Pin 2.54 1*5p	1	pcs	Copper Alloy
6	Cotter Pin	1	pcs	Stainless Steel
5	Gasket	2	pcs	Silicone
4	Housing	1	pcs	Plastic
3	Glue	1	pcs	Epoxy Resin
2	PCB	1	pcs	FR-4
1	USB AF 180 L15.1	1	pcs	Copper Alloy

UNIT: mm	DESCRIPTION: USB Series Panel Front Mount Lock Bayonet Type PCB		
UNSPECIFIED TOLERANCE	SCALE: 1:1	SHEET.1 OF 1	
GB/T 1804-m ISO 2768-1 1989-m	REV.: C1	SIZE:A4	ASME Y14.5-2009

CHOGORI[®]
Chogori Technology Co., Ltd

PART NO.:	34000000-05	DRAWN:	麦宏发	DATE	2024/2/27
DWG NO.:	34000000-05	CHECKED:		DATE	
CUSTOMER NO.:	34000000-05	APPROVED:		DATE	

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.