


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 04/23/15'	~	

NOTES:

- 1.1 INSULATOR RESISTANCE: 100MΩ Min. AT 100V DC.
- 1.2 CURRENT RATING: 1.8A FOR PIN1 AND PIN5.
- 1.3 DIELECTRIC STRENGTH: AC 100V FOR 1 Minute.
- 1.4 HOUSING: THERMOPLASTIC (UL 94-0).
- 1.5 CONTACT: COPPER ALLOY
- 1.6 SHELL: STEEL.
- 1.7 HOOK: STEEL.
- 1.8 PRODUCT NUMBER CODE:

DS1105-04 - X X X - N - 025

- CONTACT PLATED:
0: Selective Gold Flash
- SHELL PLATED:
N: Nickel
- COLOR OF HOUSING:
B: Black

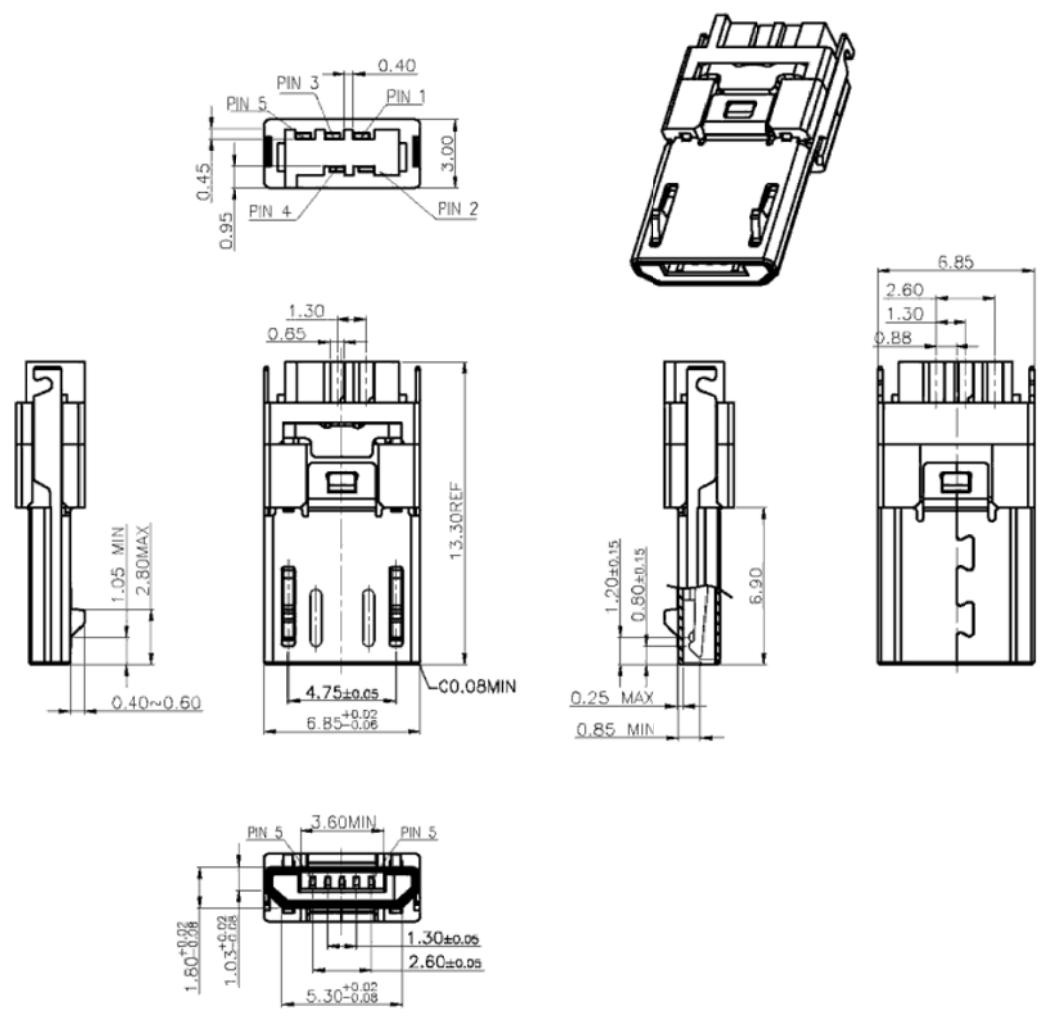

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MICRO USB MALE		
X.	±0.60	X.	±5°	UNITS	mm	5P(Front 5 Back 5) SOLDER TYPE			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1105-04 SERIES		
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER							
SCALE		1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1105-04-XXXX-N-025-A							