

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/11/14'		

Notes:

1.Material:

- 1.1. Housing: High Temperature LCP, UL94V-0 Roted Color: Black.
- 1.2. Contacts: Copper Alloy.
- 1.3. Stator: Copper Alloy.
- 1.4. Shell: Stainless Steel.



2.Specifications:

- 2.1. Operate Temperature:  $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$
- 2.2. Insulation Resistance:  $1000\text{M}\Omega$  Min.
- 2.3. Contact Resistance:  $30\text{m}\Omega$  max.
- 2.4. Withstanding Voltage:  $500\text{V AC}$  1min.
- 2.5. Operating Voltage:  $30\text{V AC/DC}$ .
- 2.6. Current Rating: 1.0A

3.Product Number Code:

DS1139-06 - XX X X X X X X

- Packing Type  
R: Tape On Reel
- Shell Plating  
S: Stainless
- Housing color  
B: Black
- Contact Plating  
4: Selective 3u" gold
- Mounting type  
S: SMT type
- Connector type  
S: Socket
- No. of contacts  
08:08pin

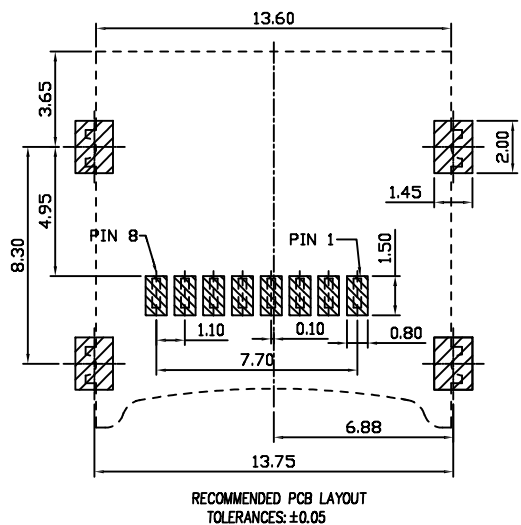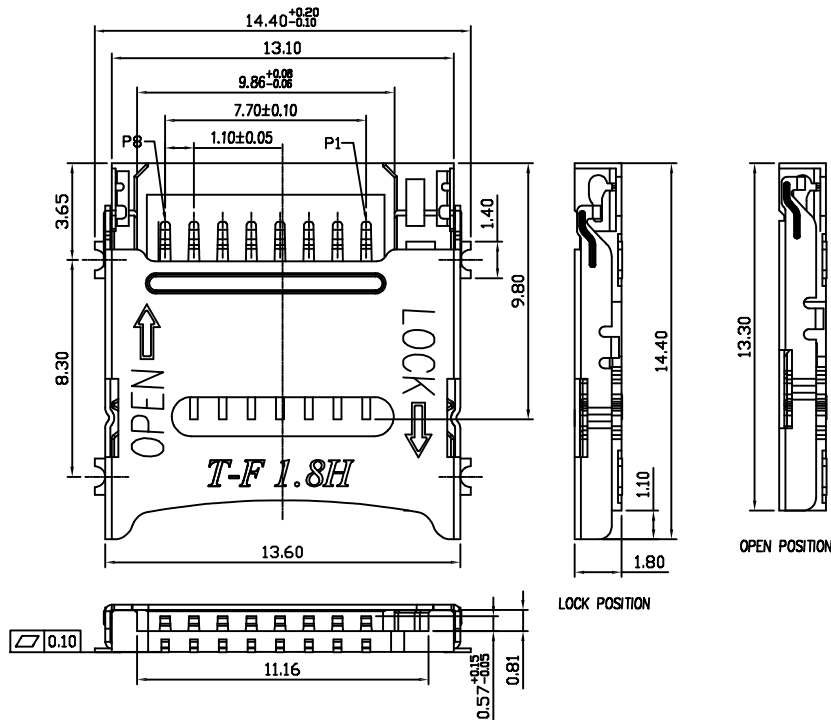

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Micro SD Card ZIF H=1.8mm SMT Type
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1139-06 SERIES
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		<b>晨翔电子有限公司</b> <b>CONNFLY® CONNFLY ELECTRONIC CO., LTD</b>			
SCALE		1:1					
DRAWING NO.		C-DS1139-06-XXXXXXX-A					