


How to order  
DY-07 - 2 T ZY

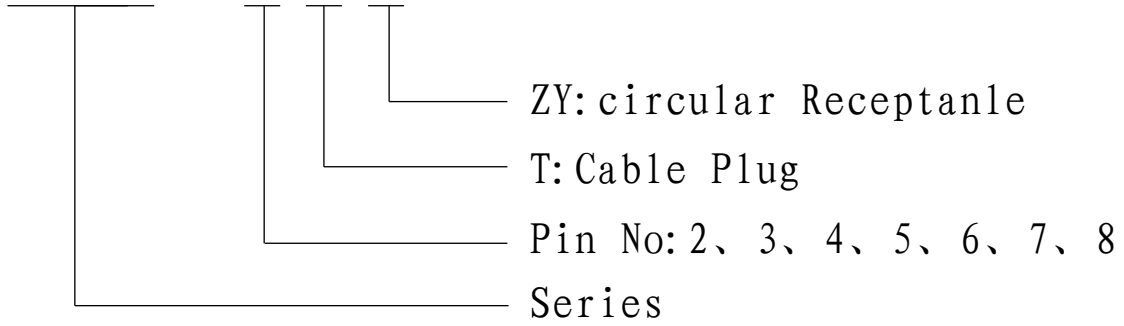

材料和技术参数  
Material and spec

接插方式 Coupling	卡扣连接 Bayonet	<p>Insert Arrangement</p>
	螺纹连接 Threaded coupling	
外壳材料 Shell material	增强尼龙 PA66+30%GF	
绝缘体 Insert material	增强尼龙 PA66+30%GF	
接触体材料 Contact material	铜(镀银/金) siverplatedcoper/gold	
接线方式 Termination	焊接 Solder	
接插次数 Mating cycle	500次 500	
温度范围 Temperature range	-40℃ — +105℃	
电缆直径 Cable diameter	∅3mm — ∅7.5mm	

芯数 Number of contact	2	3	4	2A	3A	4A	5	6	7	8	10	12
额定电流(Ac, V) Rated current/Voltage	10A260V	10A260V	10A260V	10A260V	10A260V	10A260V	10A260V	10A260V	10A260V	10A260V	10A260V	10A260V
工作电压(Ac, V) 分钟 Operation limit Voltage	200	200	200	200	200	200	200	200	200	200	200	200
耐电压(Ac, V) 分钟 Test Voltage	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500
绝缘阻抗(MΩ)dc500V Insulation resistance	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
接触电阻(mΩ)dc1A Contact resistance	6	6	6	3	3	3	3	3	3	3	3	3
接触口孔径 Contact resistance	1.7	1.7	1.7	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
接触件孔径(∅) Solder inter diameter	1.6	1.6	1.6	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0

GENERAL TOLERANCE X. ±0.60 .X ±0.38 .XX ±0.25	ANGLE TOLERANCE X. ±5° .X ±3° .XX ±2°	PROJECTION		TITLE	PRODUCT SPECIFICATION
		UNITS	mm		
		SHEET SIZE	A4	SERIES	
DRAWING TYPE	CUSTOMER				慈溪市大发精密连接器有限公司 CIXI DAFA PRECISE LINKER CO., LTD
SCALE	1:1	SHEET	1 OF 1		
DRAWING NO					