


Wiring diagram

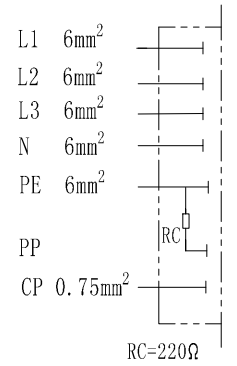


Front Note:

Front Note:

 Back Note(Arial) :
 MEAC-T-032A-V-03-5.0M-10AH
 32A 480V AC
 IEC 62196.2-2014
 IP55(mated)
 201xxxxx-000x

- NOTES:
1. Cable: prEN50620 EV 5*6mm²+1*0.75mm² Black
 2. Reference standard : IEC62196.1; IEC62196.2; IEC61851
 3. Rated voltage : 480V
 4. Rated current : 32A
 5. Operating temperature: -30° C ~ +50° C
 6. Insulation resistance: 5MΩ
 7. Withstanding voltage : 2500V
 8. Levels of protection: IP55
 9. Mechanical working life(mating cycles): 10000 TIMES
 10. Insertion and extraction force: 100N
 11. RoHS Compliance

Technical parameters	
Rated voltage	480V AC
Rated current	32A
Temperature range	-30°C ~ +50°C
Insulate resistance	>5MΩ, 500V DC
Bear voltage	L、N AND PE >2500V AC
	L AND N >2500V AC
Ingress protection	IP55 (Mated)
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Standart	IEC 62196.2-2014

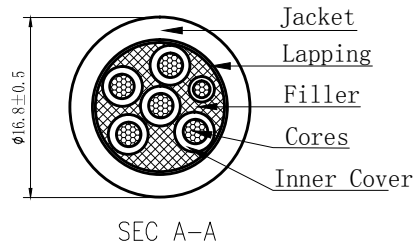

Customer Drawing

线性尺寸范围	.XX	.X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
角度尺寸范围	.XX	.X
	±0.5°	±1.0°

PART NO. :	NINGBO DEGSON ELECTRICAL CO., LTD		
APPD:	NAME: Vehicle Connector (32A AC three phase)		
CHKD:	MEAC-T-032A-V-03-5.0M-10AH		
DRFT:	TITLE: Customer Drawing	REV	D0-1
	DRAWING NO. : MEAC-T-032A-C02	SHEET	1/1
	DO NOT SCALE DRAWING	SCALE	1:3

