



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

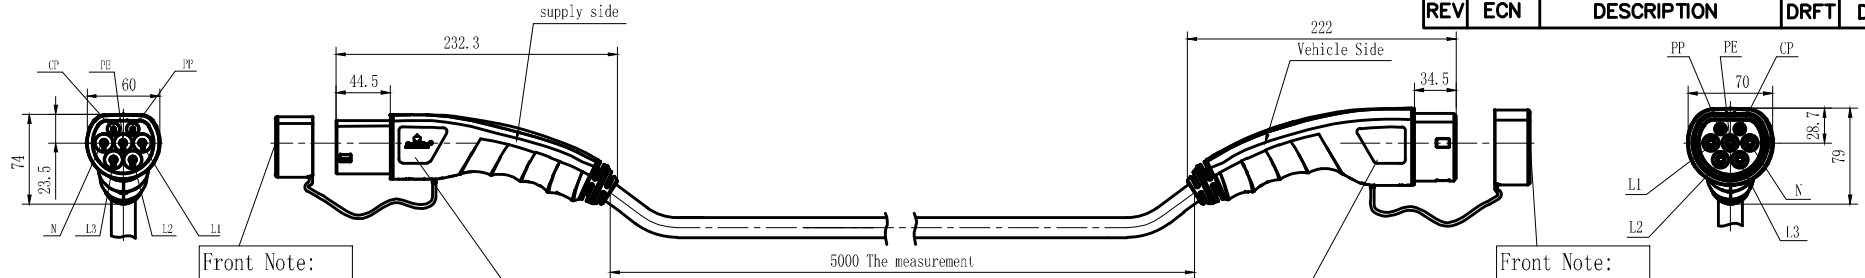

Front Note:

Front Note:

Wiring diagram

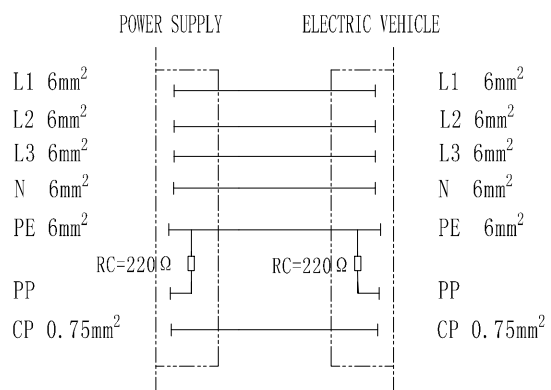

Front Note:

 Back Note(Arial) :
 MEAC-T-032A-P-03-5.0M-10AH
 32A 480V AC
 IEC 62196.2-2014
 IP55(mated)
 201xxxxx-000x

Front Note(Arial) :
 MEAC-T-032A-V-03-5.0M-10AH
 32A 480V AC
 IEC 62196.2-2014
 IP55(mated)
 201xxxxx-000x
 Back Note:

- NOTES:
1. Cable: EV 5*6mm²+1*0.75mm²
 2. Reference standard : IEC62196.1-2014; IEC62196.2-2014; IEC61851
 3. Rated voltage : 480V
 4. Rated current : 32A
 5. Operating temperature: -30° C ~ +50° C
 6. Insulation resistance: 5MΩ
 7. Withstanding voltage : 2500V
 8. Levels of protection: IP55
 9. Mechanical working life(mating cycles): 10000 TIMES
 10. Insertion and extraction force: 100N
 11. RoHS Compliance

Technical parameters

Rated voltage	480V AC
Rated current	32A
Temperature range	-30°C ~ +50°C
Insulate resistance	>5MΩ, 500V DC
Bear voltage	L, N AND PE >2500V AC
	L AND N >2500V AC
Ingress protection	IP55 (Mated)
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Standart	IEC 62196.2

Customer Drawing

DETACHED LISTS	PART NO.:	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: EV ELECTRIC VEHICLE AND EV POWER SUPPLY (32A three-phase)		
	CHKD:	MEAC-T-032A-VP-03-5.0M-10AH		
	DRFT:	TITLE: Customer Drawing	REV	DO-1
		DRAWING NO.: MEAC-T-032A-C03	SHEET	1/1
 THIRD ANGLE PROJECTION		 DO NOT SCALE DRAWING	SCALE	1:6