

SPECIFICATION



Current Rate:1 AMP
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:20m Ω Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C

MATERIAL



Insulator:Polyester,UL 94V-0
 Standard:Nylon 6T
 Contact Pin:Copper Alloy
 Contact Plating:Gold Flash all over

PLL1.27-xR

Pin Header 1.27mm SQ Pin=0.4mm 1 Row H=1.0/1.5/2.5mm Right Angle Type

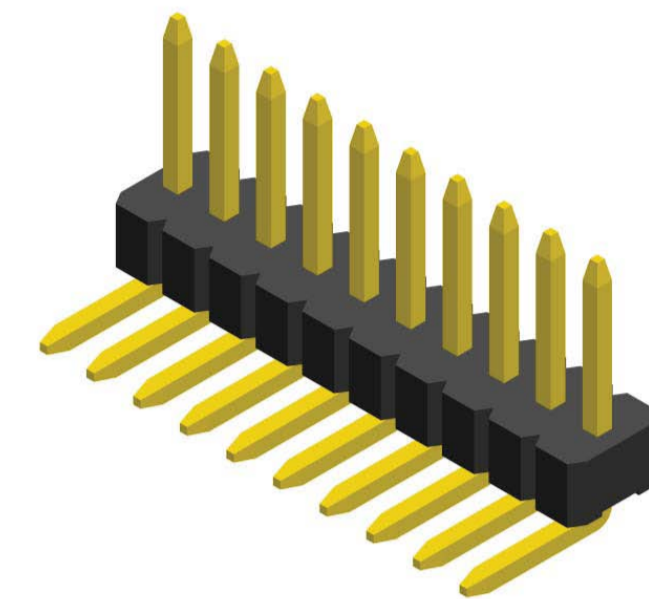
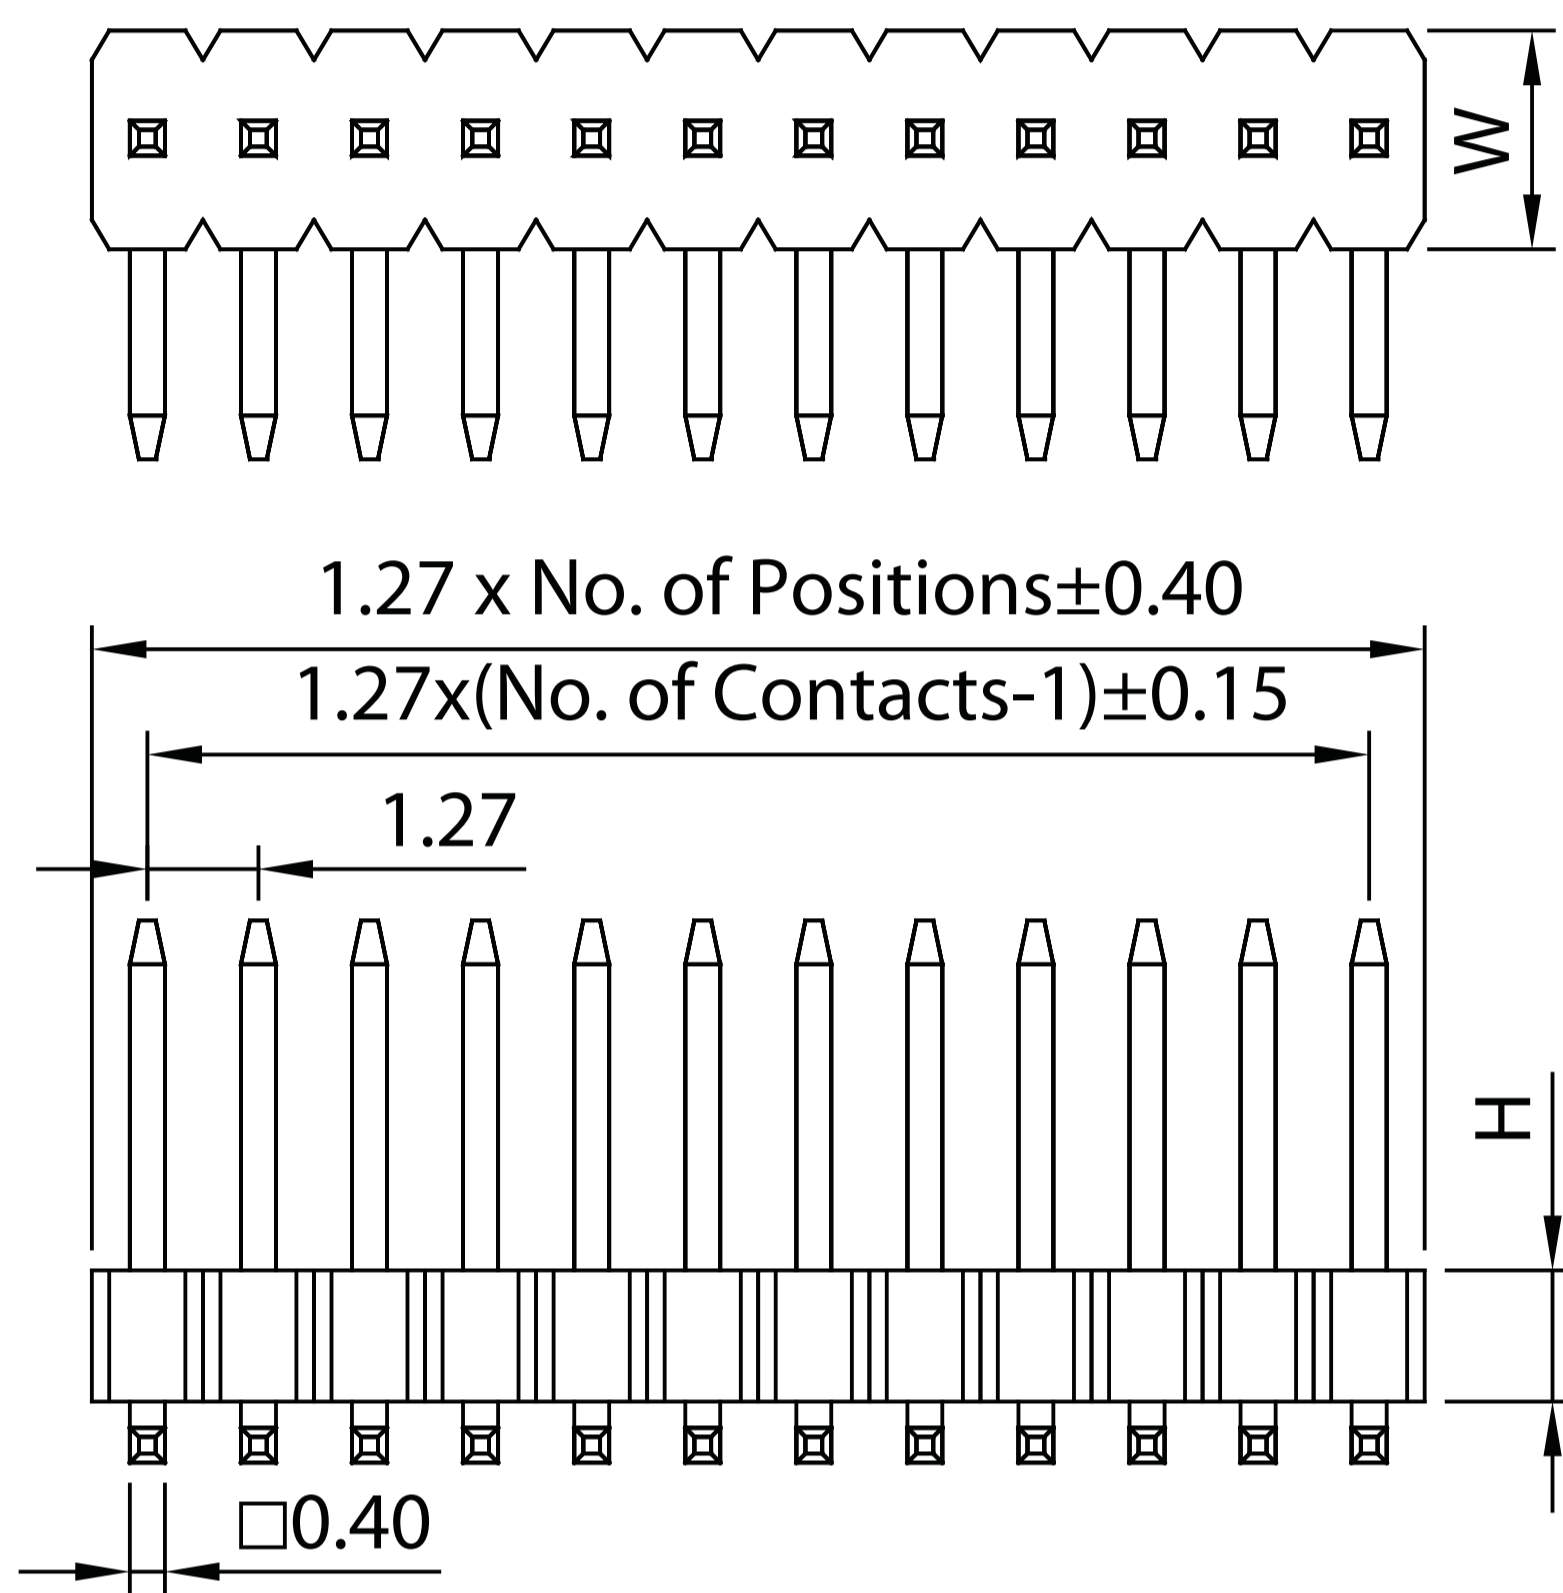


	Dim. C	Dim. W
H=1.0mm	1.50	2.10
H=1.5mm	2.00	2.10
H=2.5mm	3.00	2.50

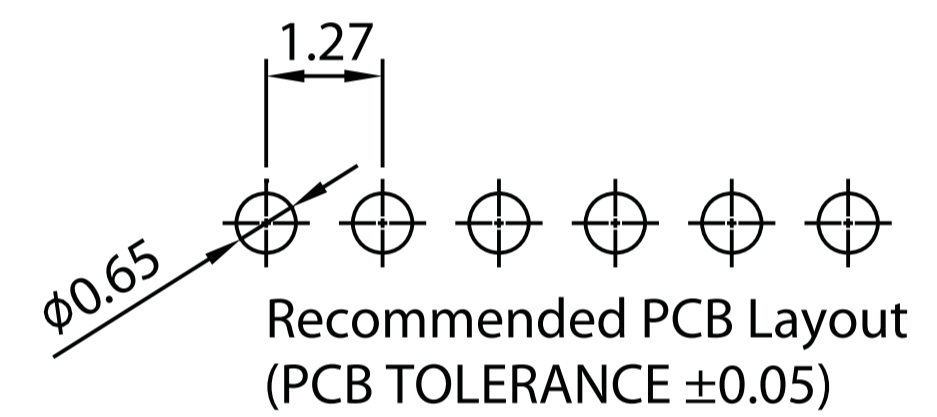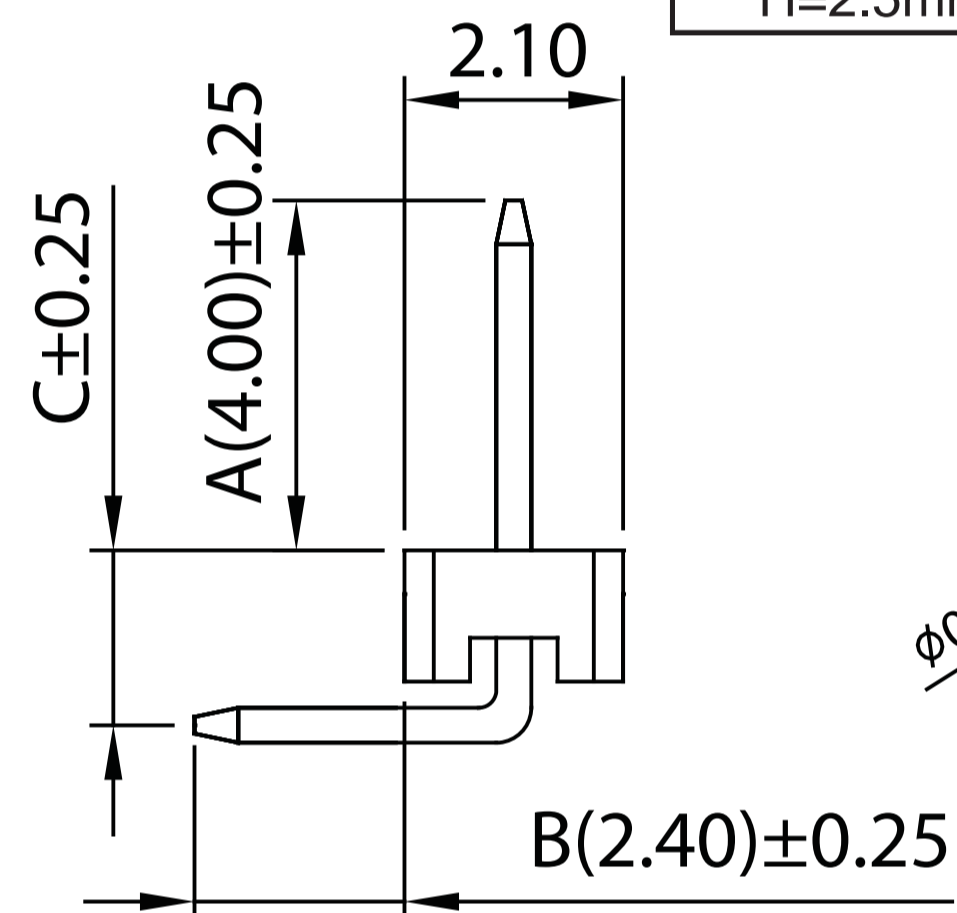

PLLD1.27-xR

Pin Header 1.27mm SQ Pin=0.4mm 2 Row H=1.0/1.5/1.7/2.0/2.5mm Right Angle Type

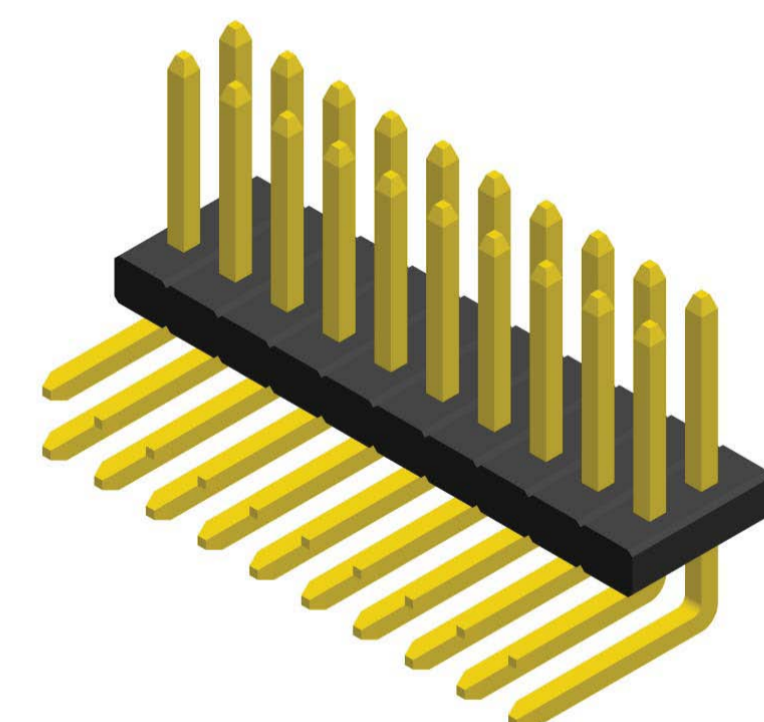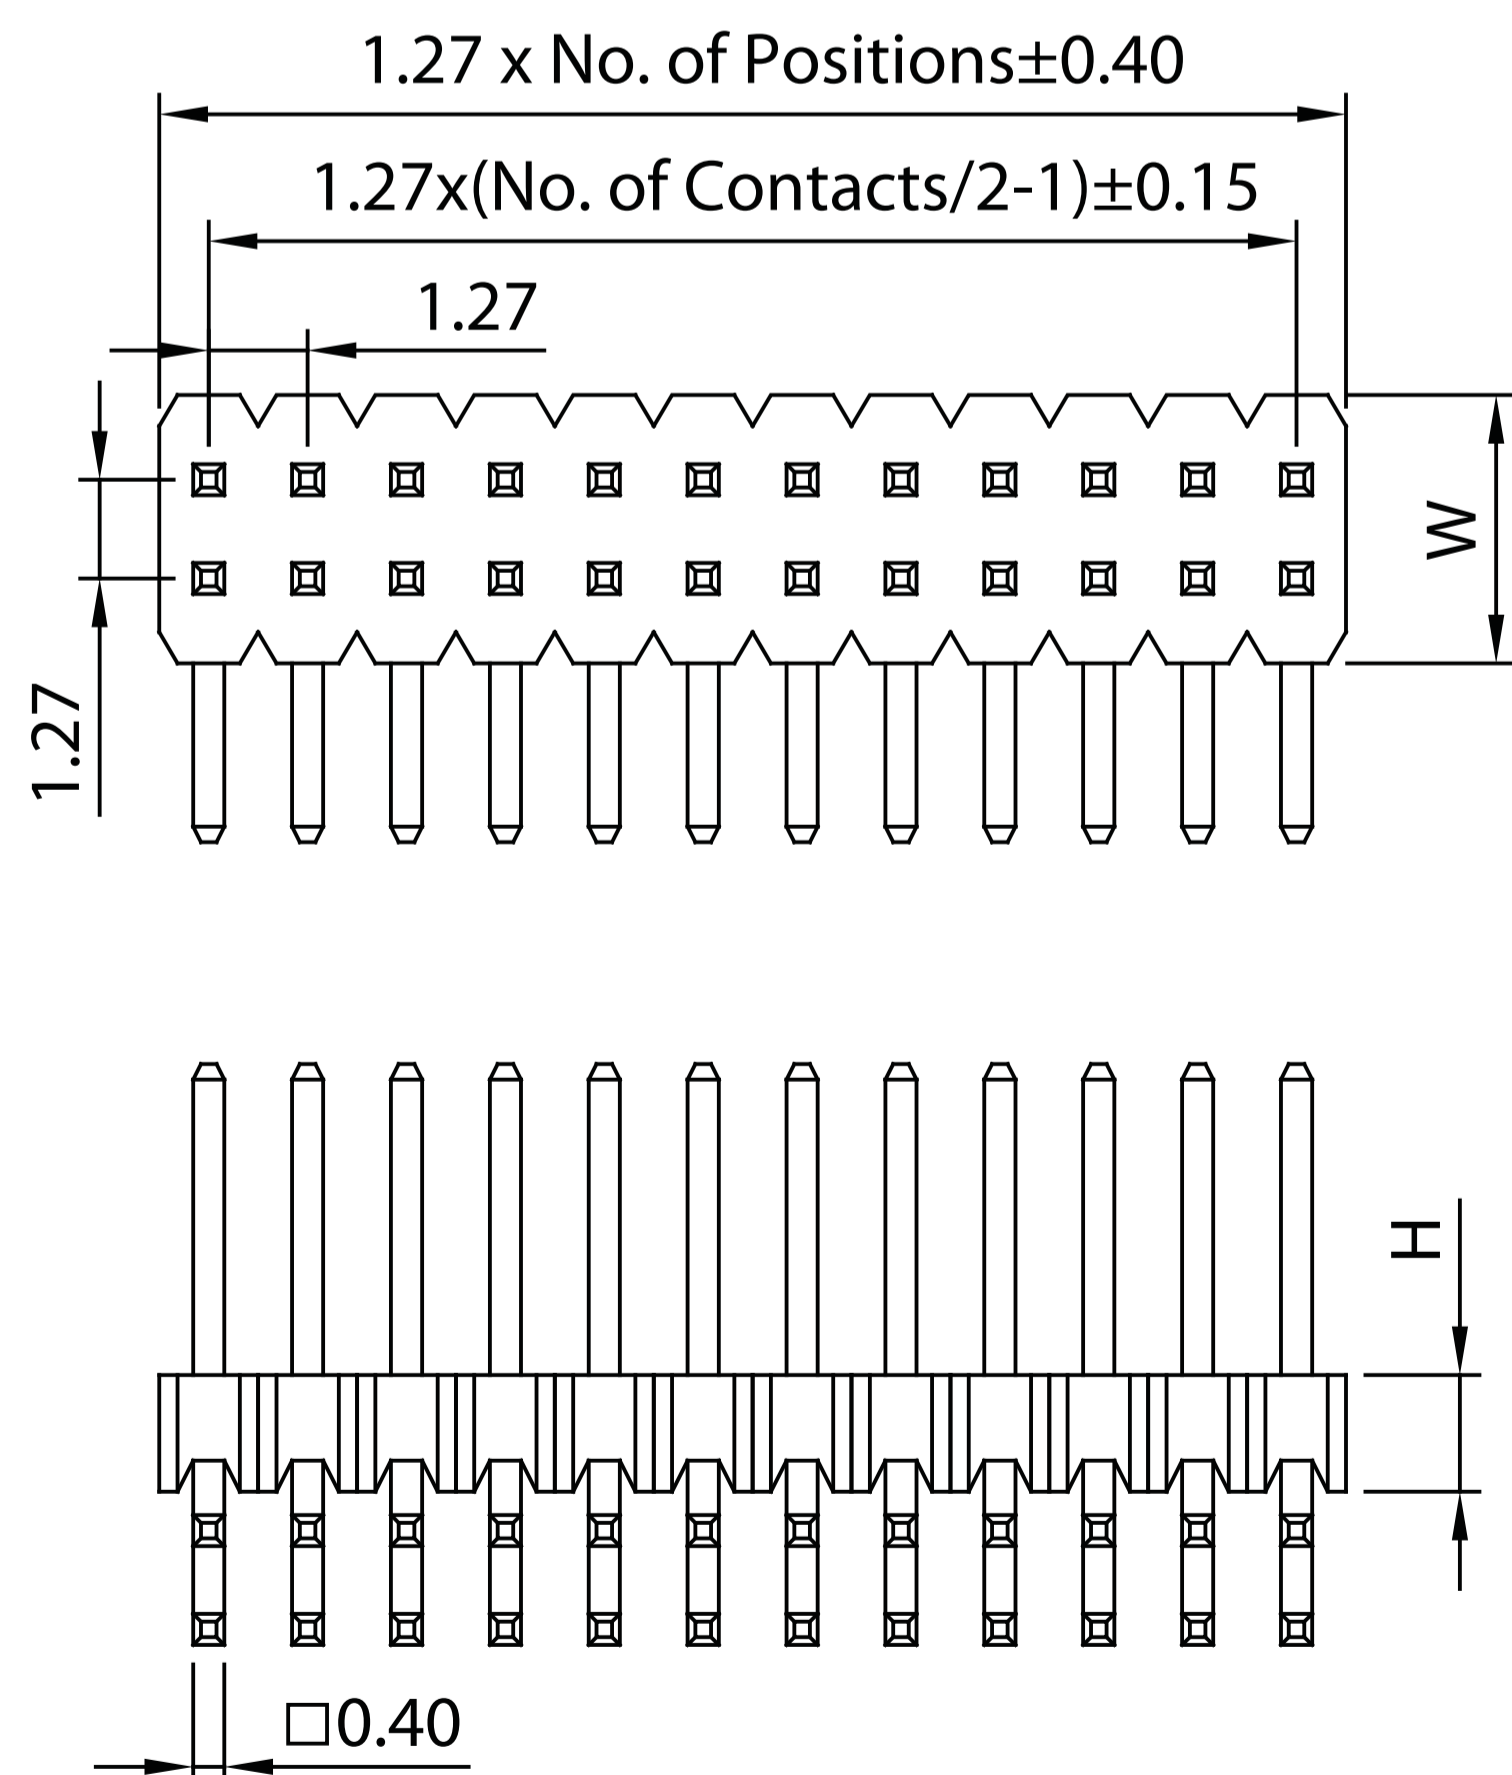

	Dim. C	Dim. W
H=1.0mm	1.50	3.40
H=1.5mm	2.00	3.40
H=1.7mm	2.20	3.00
H=2.0mm	2.50	3.00
H=2.5mm	3.00	3.00

