

**SPECIFICATION**



Current Rate:1 AMP  
 Insulation Resistance:1000M Ω Min.  
 Contact Resistance:20m Ω Max.  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C

**MATERIAL**


Insulator:Polyester,UL 94V-0  
 Standard:Nylon 6T  
 Contact Pin:Copper Alloy  
 Contact Plating:Gold Flash all over

# PLL1.27-xS


Pin Header 1.27mm SQ Pin=0.46mm H=1.7/2.5mm SMT Type

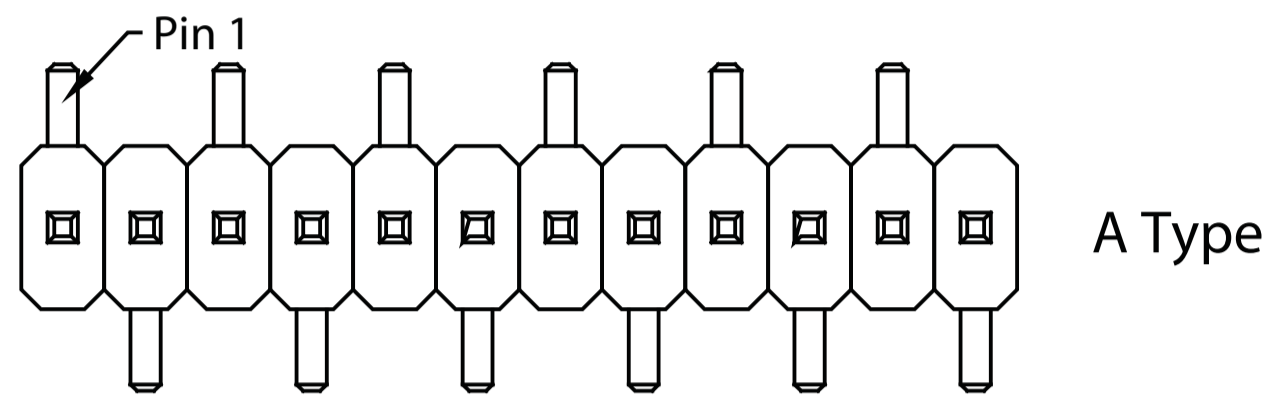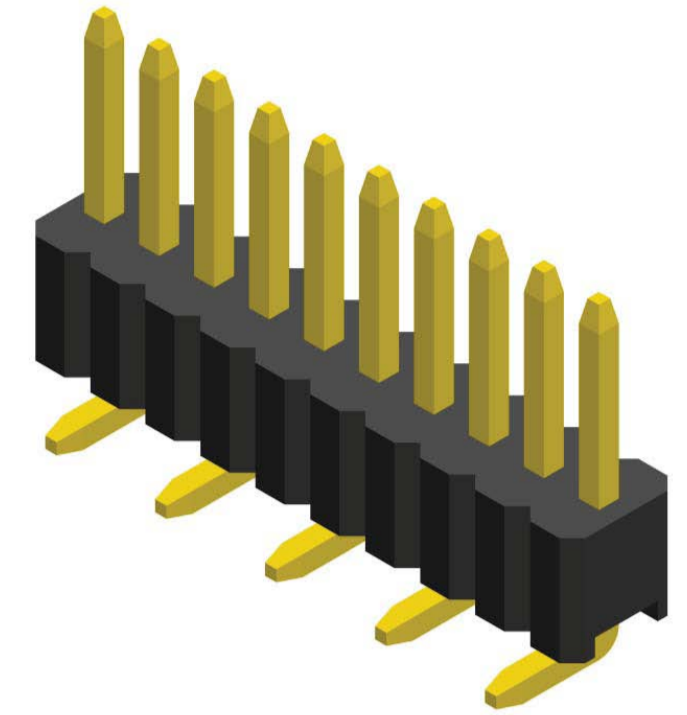


A Type

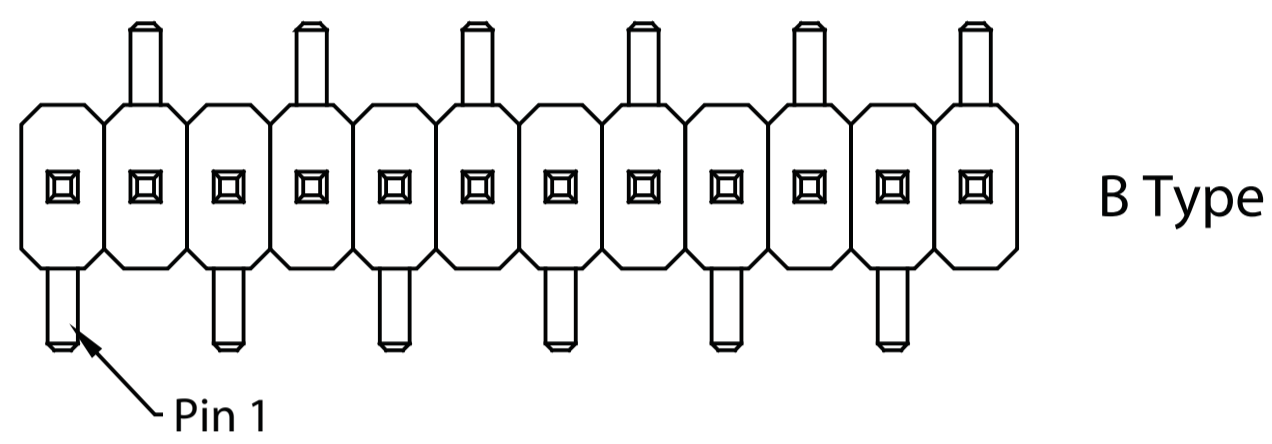


B Type

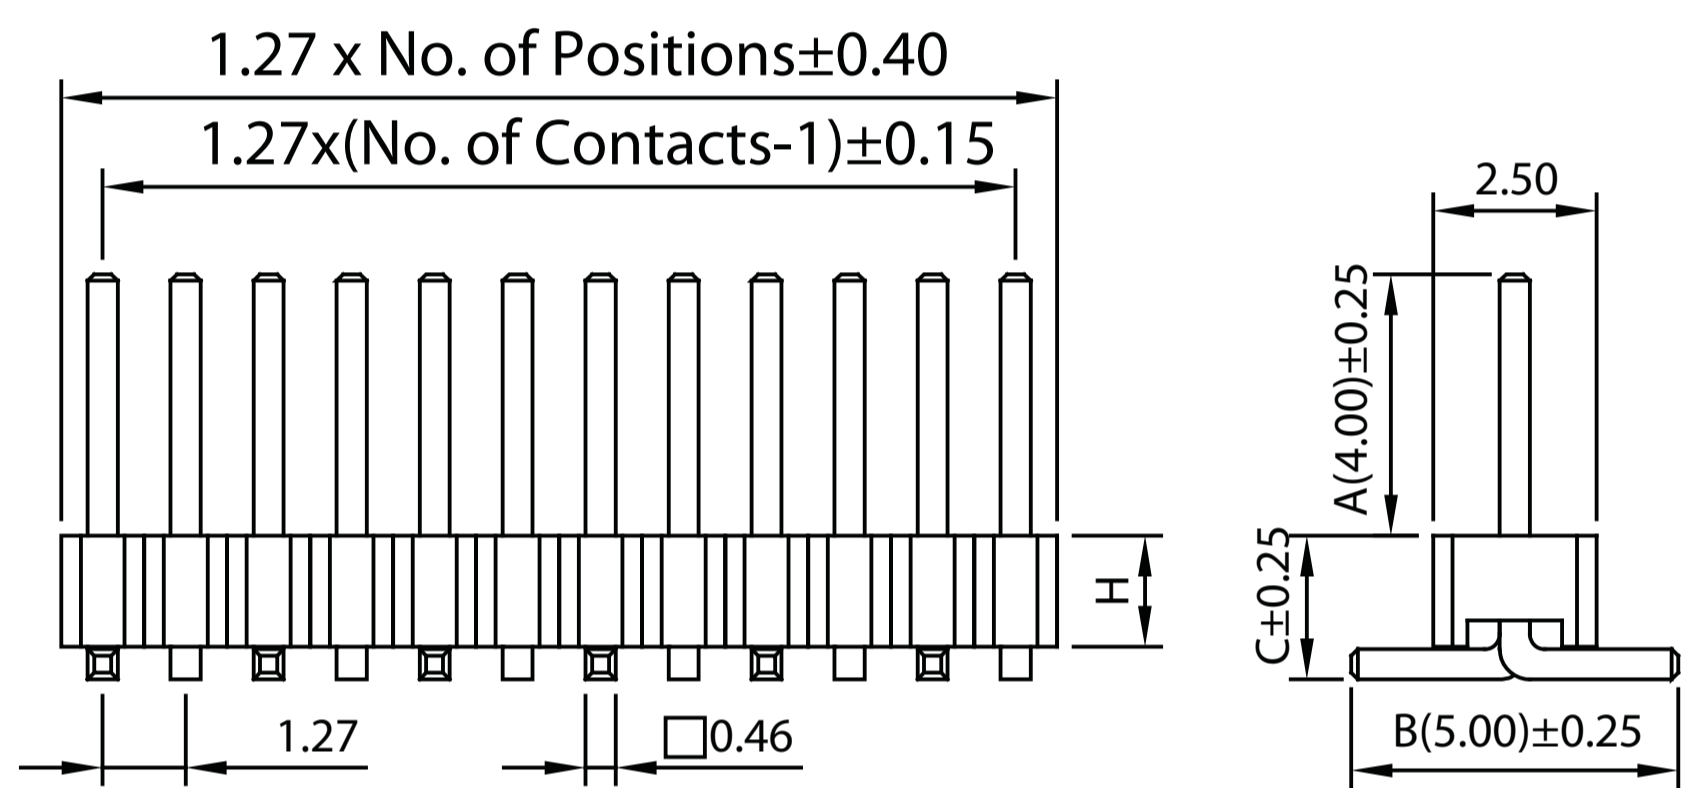

	Dim. C
H=1.7mm	2.2
H=2.5mm	3.0

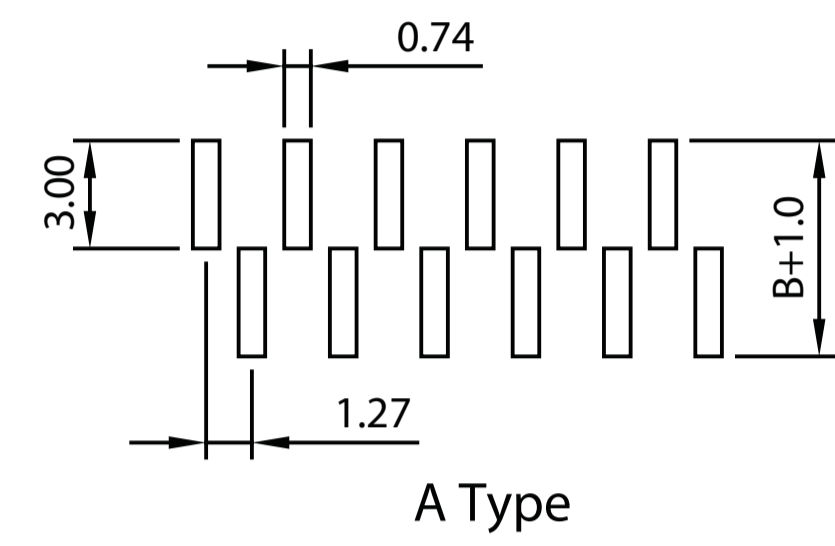

A Type


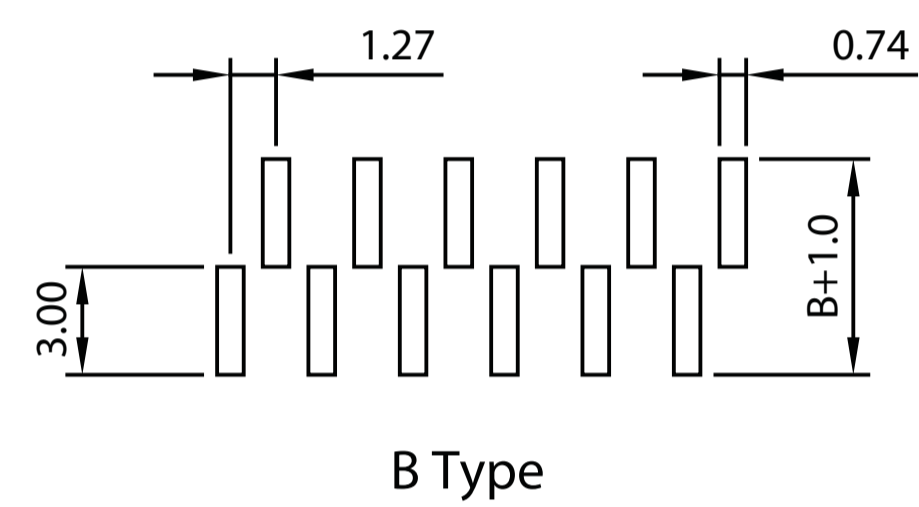


B Type


Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

# PLLH1.27-xS


Pin Header 1.27mm SQ Pin=0.46mm H=1.7/2.5mm Stack SMT Type

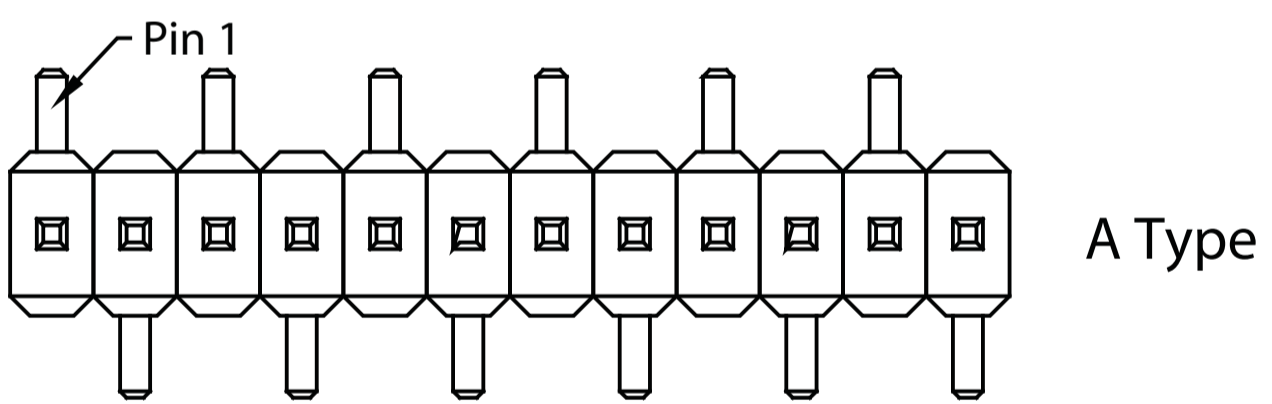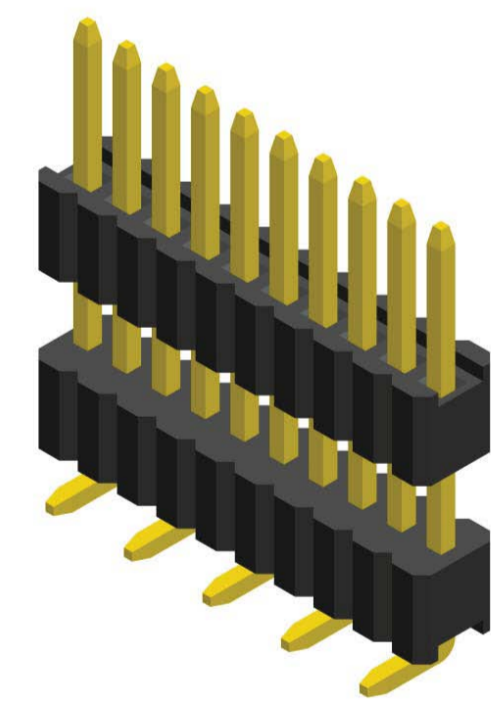


A Type

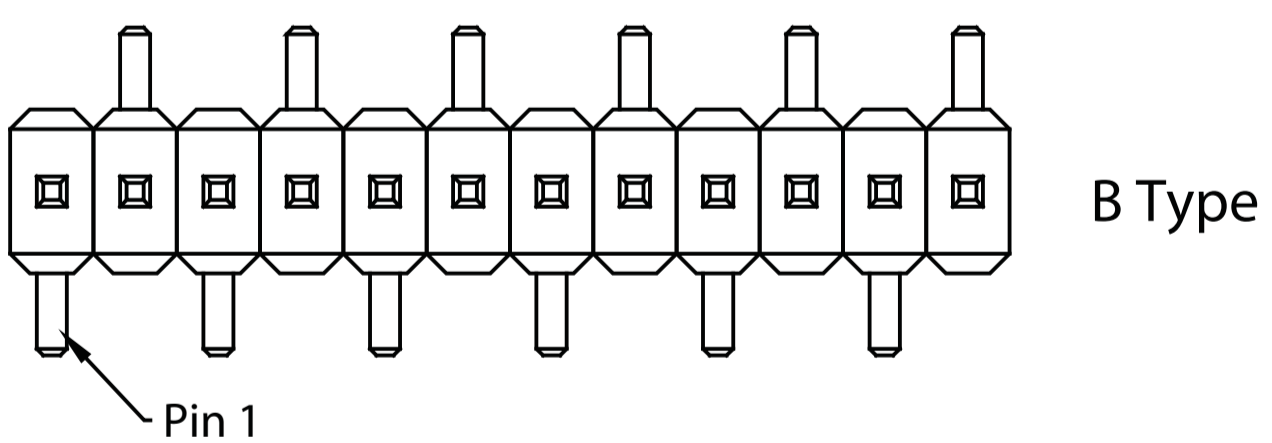


B Type

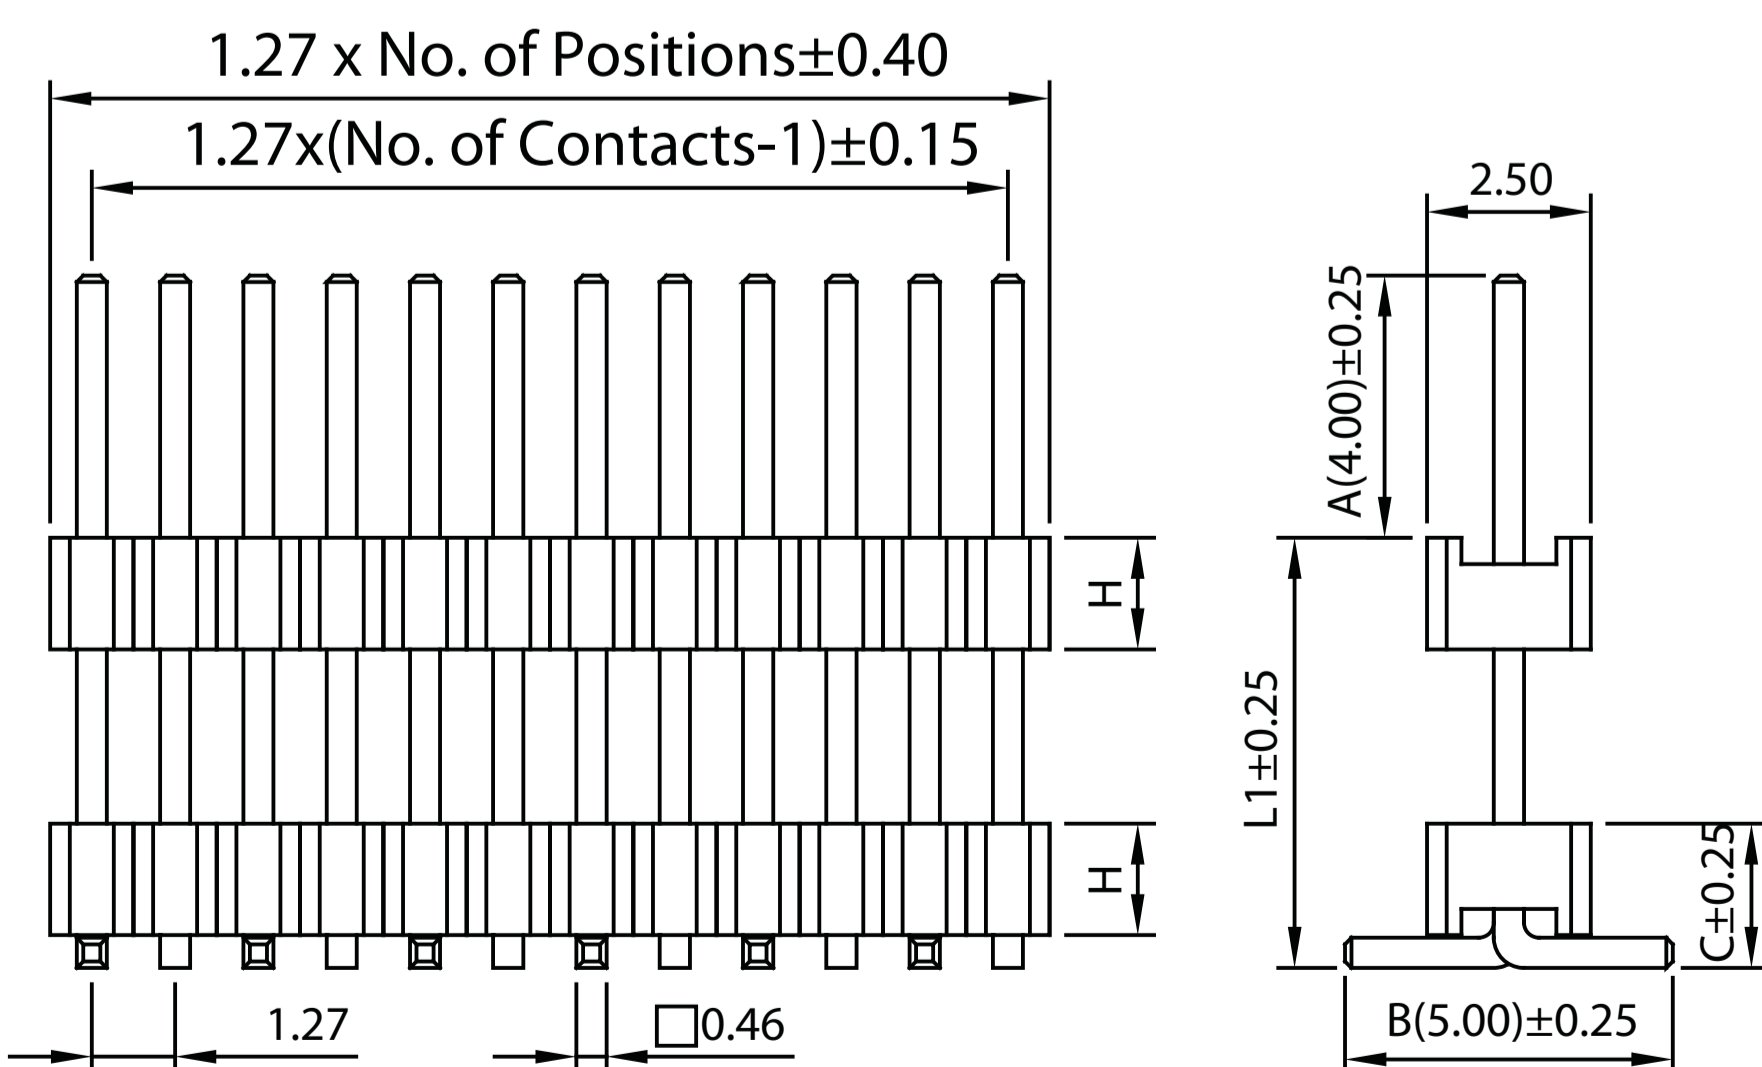

	Dim. C
H=1.7mm	2.2
H=2.5mm	3.0

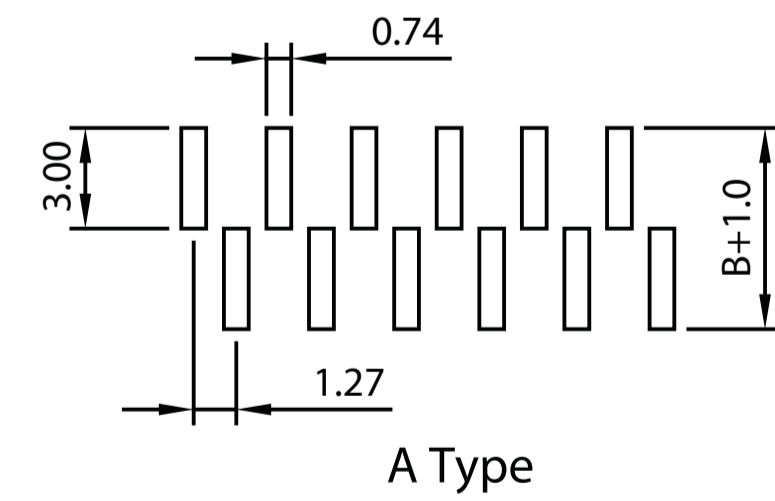

A Type

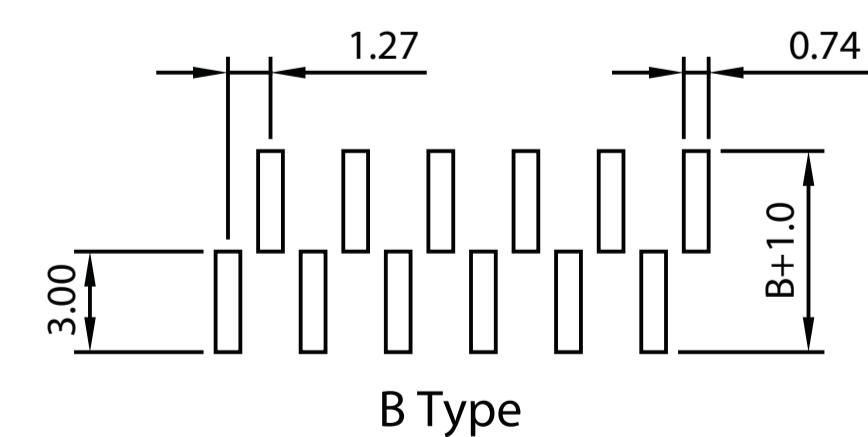

B Type

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)