

SPECIFICATION






Current Rate:1.5 AMP
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:20m Ω Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:Polyester,UL 94V-0
 Standard:Nylon 6T
 Contact Pin:Copper Alloy
 Contact Plating:Gold Flash all over

PBS1.27-x






Female Header 1.27mm 1 Row H=3.4/4.4mm Straight Type

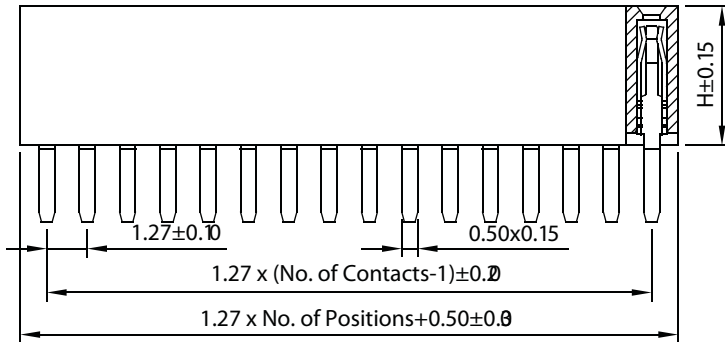

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

PBD1.27-x

Female Header 1.27mm 2 Row H=3.4/4.4mm Straight Type

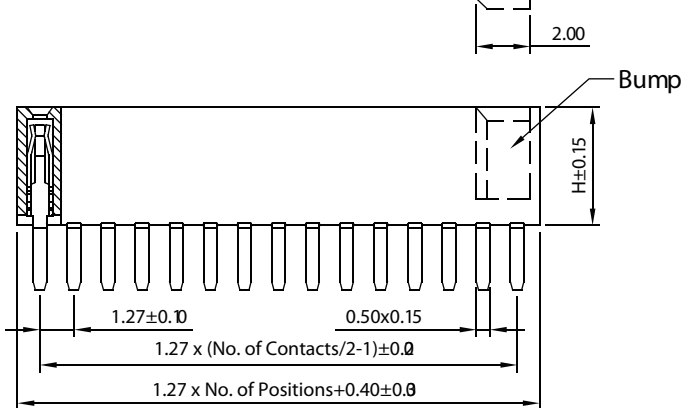

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)