

PCB Connector Series



KLS1-MA-3.96 Pitch=3.96mm TYPE

Electrical Specification:

Rated Voltage: 250V AC/DC
 Rated Current: 7A
 Contact Resistance: 10mΩ max
 Insulation Resistance: 1000MΩ min
 Withstand voltage: 1500V AC/MIN
 Temperature range for usage : -40°C~+105°C

Material:

Housing: PA66 UL94V-2
 Contacts: Phosphor bronze
 Plating: Tin 50u" over 100u" nickel

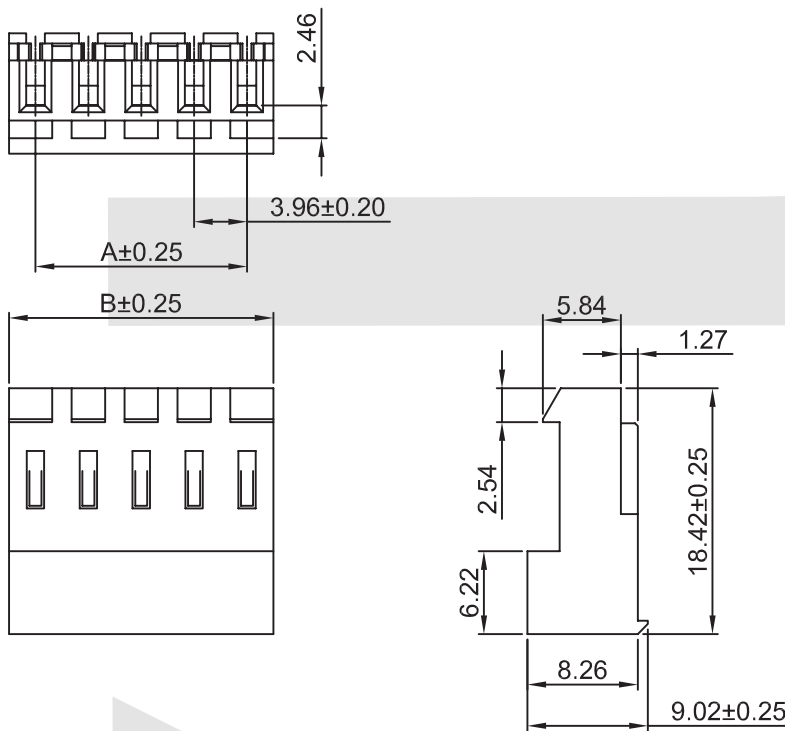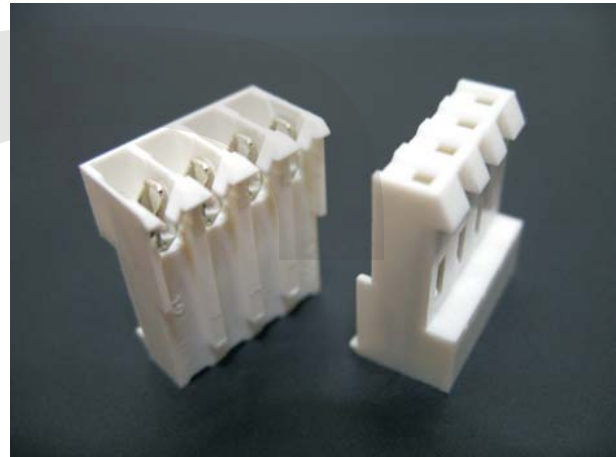

PART NO.	Dimensions	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20
21	79.20	83.16
22	83.16	87.12
23	87.12	91.08
24	91.08	95.04

ORDER INFORMATION

Product NO.: KLS1-MA-3.96-XX-R

Series No. _____
 Pitch: 3.96=3.96mm

O -Orange=18 AWG R -Red=22 AWG
 Y -Yellow=20 AWG W -White=24 AWG
 BL-Blue=26 AWG BK-Black=18 ~ 26 AWG
 PIN Number: 2 ~ 24Pin