


Material: Nylon66 UL 94V-2
 Accept WW420-FT Terminal
 Mate with WW420-F Series housing
 Mate with WW420-V(R)Series header
 Current rating:9A AC,DC
 Voltage rating: 600V AC,DC Min
 Contact resistance: 10m Ω Max
 Insulation resistance: 1,000M Ω Min
 Withstanding voltage: 1,500V AC/Minute
 Temperature range: -25°C to +85°C

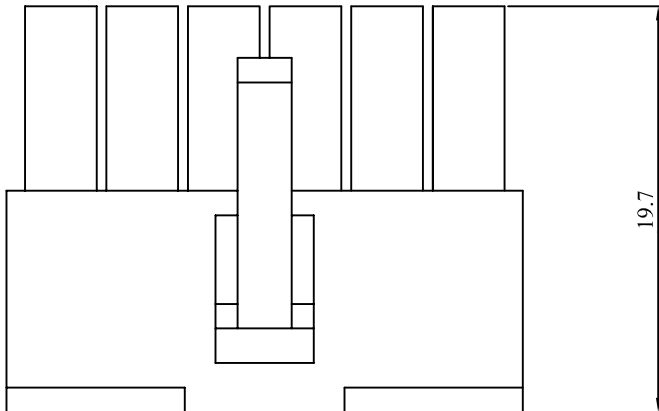

Material Nylon66.UL94V-2

	PATR NO	DIMENSION	
		A	B
2	WW420-M02	5.5	
4	WW420-M04	9.7	4.2
6	WW420-M06	13.9	8.4
8	WW420-M08	18.1	12.6
10	WW420-M10	22.3	16.8
12	WW420-M12	26.5	21.0
14	WW420-M14	30.7	25.2
16	WW420-M16	34.9	29.4
18	WW420-M18	39.1	33.6
20	WW420-M20	43.3	37.8
22	WW420-M22	47.5	42.0
24	WW420-M24	51.7	46.2

Rev	Dexcription/Date	Drawn By: Storm.li	Customer:	Third angle projection 		Units: mm	
△		Checked By: Simmon	Part No.:	WW420-MXX		General Dimension Tolerance	
△		Approved By: Tony	Title:	Mini-Fit Male housing		X.X ±0.10	X.XX ±0.02
SGS Report No.: KA/2004/80788/A-2						X.XXX ±0.01	