
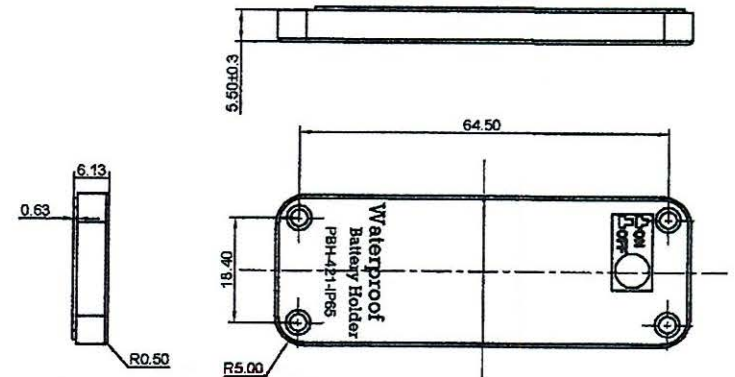


**BOTTOM**

**SPECIFICATION**

- (1) ITEM NO. : PBH-421-IP65-AS150MM
- (2) WIRE: UL1007 AWG 26  
     BLACK & RED: 150MM±5MM  
     STRIP & TIN: 4MM±1MM
- (3) HOLDER MATERIAL: ABS RESIN, BLACK COLOR
- (4) CONTACTS MATERIAL: 0.3MM THICK IRON NICKEL PLATED  
     SPRING MATERIAL: Ø 0.5MM SPRING STEEL NICKEL PLATED
- (5) SWITCH: PB-22E27
- (6) RoHS COMPLIANT

3					
2					
1					
NO.	MODIFICATION	DATE	SCALE	1:1.5	
General Tolerances			 The Third Angle Projection	UNIT	
0 ~ >3	± 0.10	30 ~ >120		± 0.30	MM
3 ~ >6	± 0.10	120 ~ >400		± 0.50	MAT'L
6 ~ >30	± 0.20	Angle: ± 3°			SEE SPEC.
			DATE	OCT. 19. 2019	

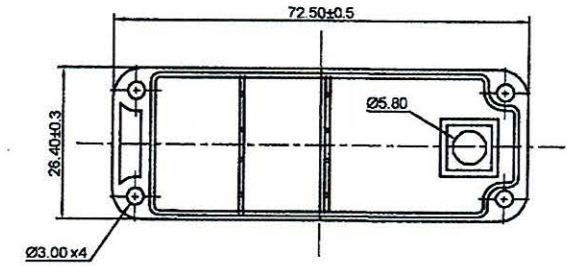

**COVER**

**SHOGYO INTERNATIONAL CORP.**  
**#PBH-421-IP65-AS150MM**  
 BATTERY HOLDER