

**SPECIFICATION**

Current Rate:3 AMP  
 Insulation Resistance:1000M Ω Min.  
 Contact Resistance:20m Ω Max.  
 Dielectric Voltage:1000V AC for one minute  
 Operation Temperature:-40°C to +105°C


Standart height (H) = 2.54

**MATERIAL**

Insulator:Polyester,UL 94V-0  
 Standard:PBT or Nylon 6T  
 Contact Pin:Copper Alloy  
 Contact Plating:Gold Flash all over

**PLS-xxR, PLS-xxR2, PLS-xxR3**

**Pin Header 2.54mm 1 Row H=1.5/1.7/2.54mm Right Angle Type**

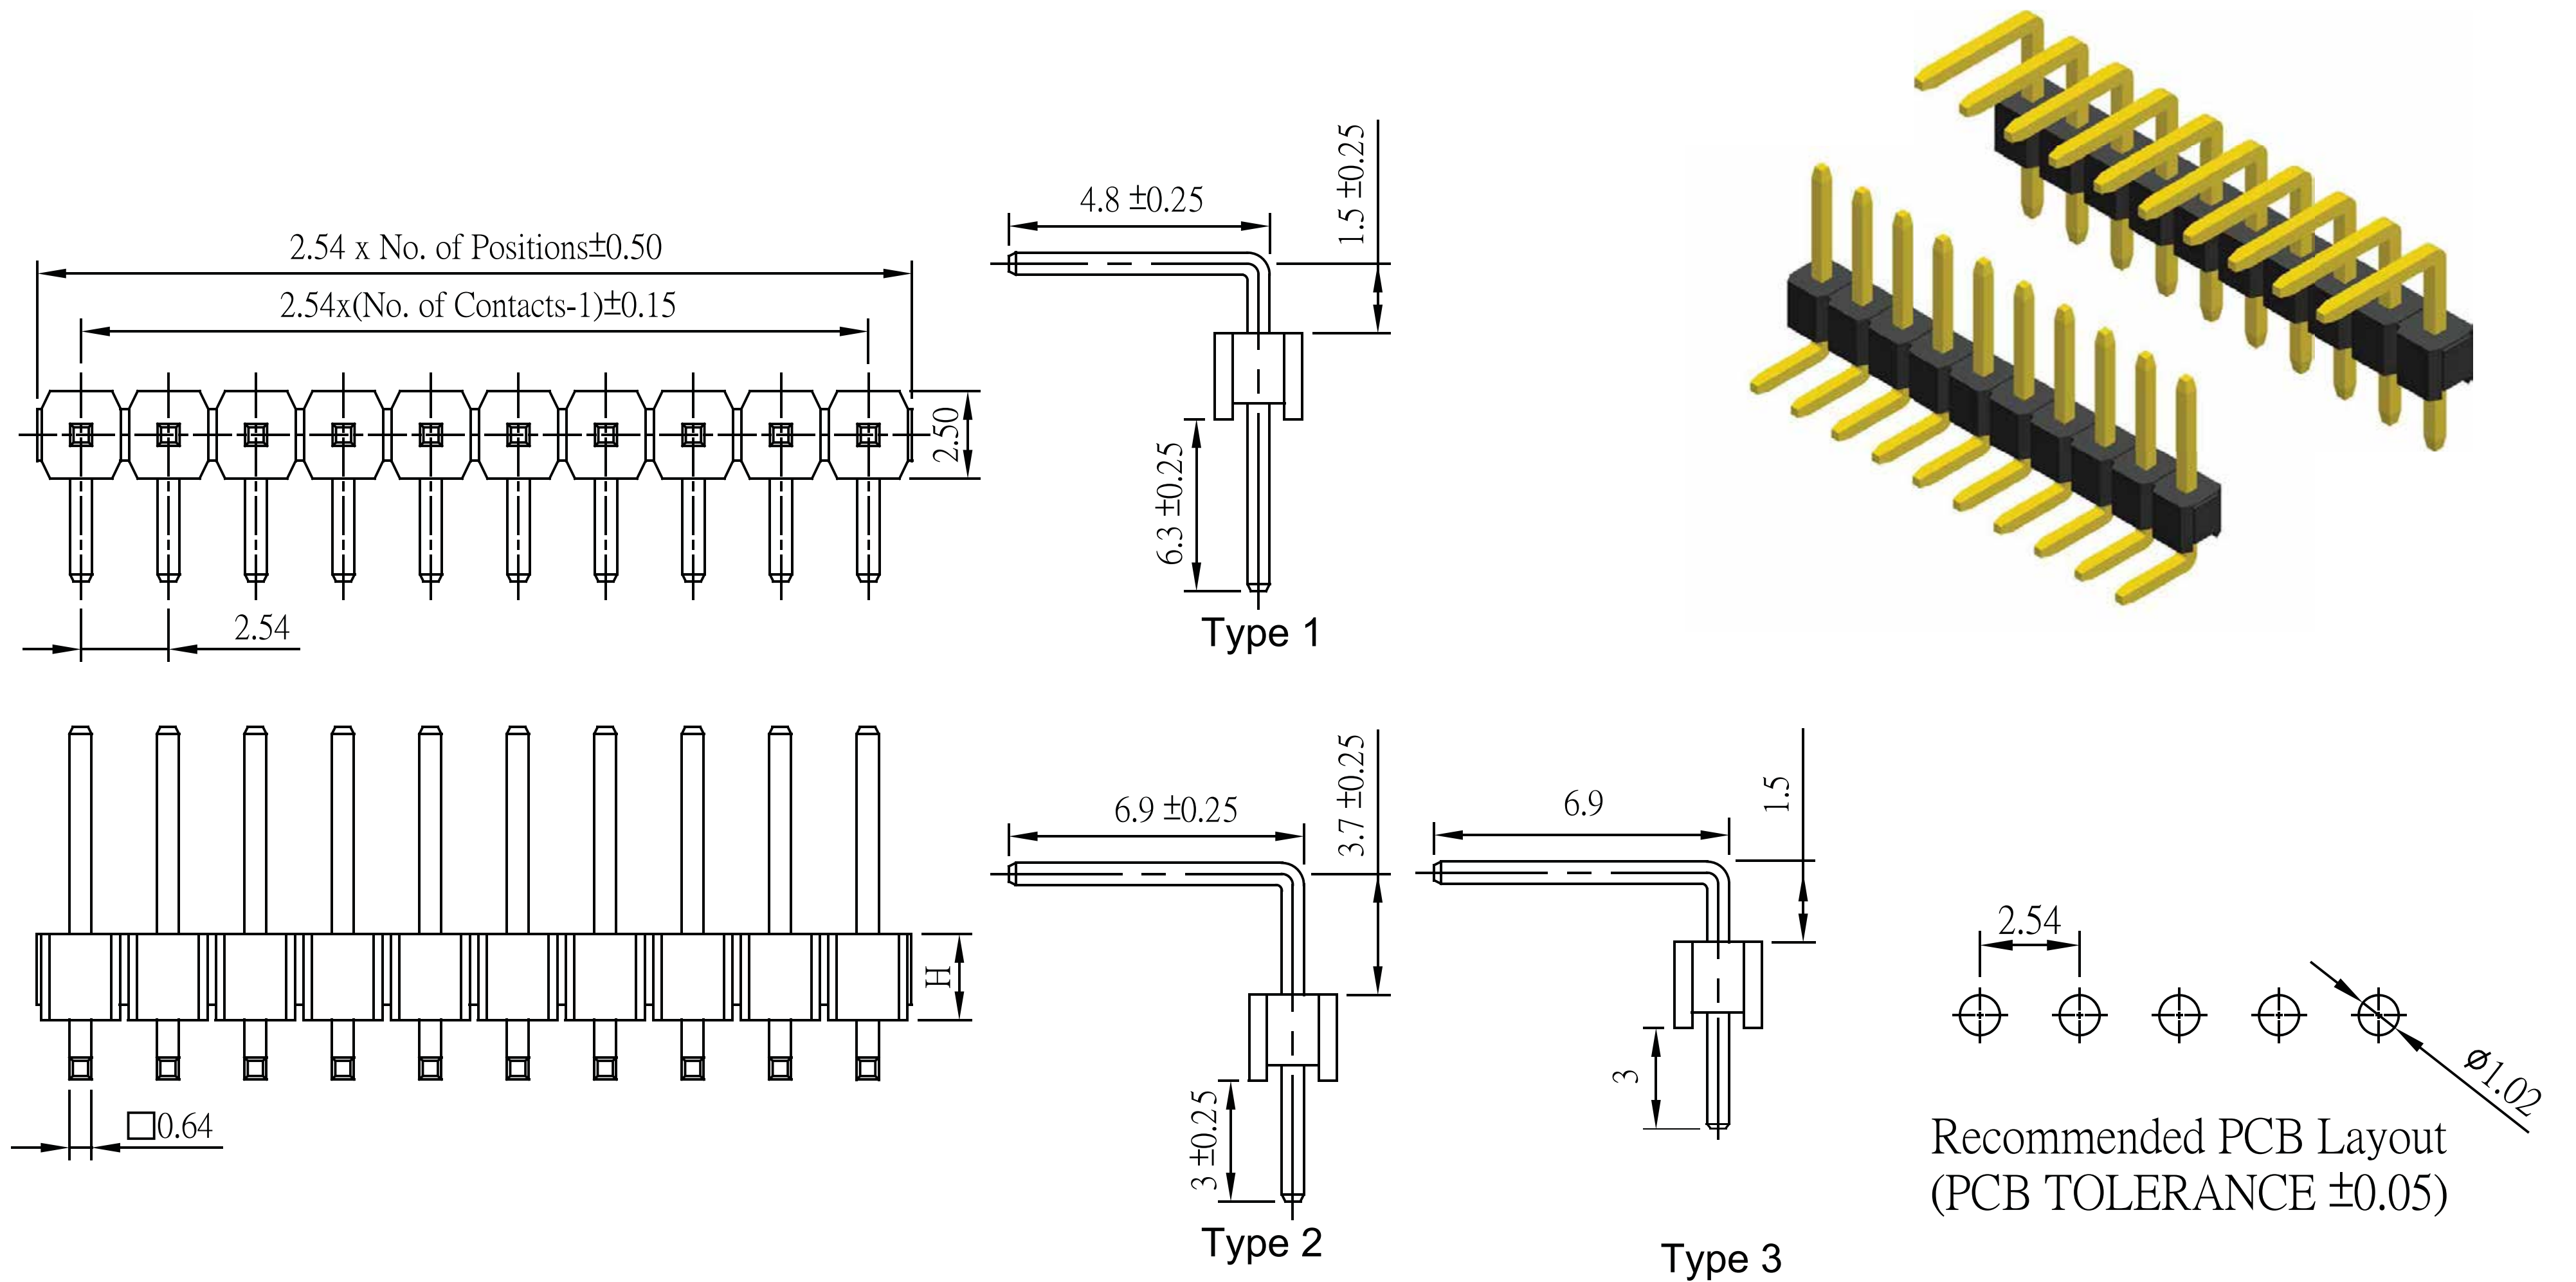

**PLD-xxR, PLD-xxR2**

**Pin Header 2.54mm 2 Row H=1.5/1.7/2.54mm Straight Type**

