SPECIFICATION

Current Rate:3 AMP
Insulation Resistance:1000M Ω Min.
Contact Resistance:20m Ω Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

Standart height (H) = 2.5

MATERIAL

Insulator:Polyester,UL 94V-0
Standard:PBT or Nylon 6T
Contact Pin:Copper Alloy
Contact Plating:Gold Flash all over

PLH-xxR

Pin Header 2.54mm 1 Row H=2.5mm Stack Right Angle Type

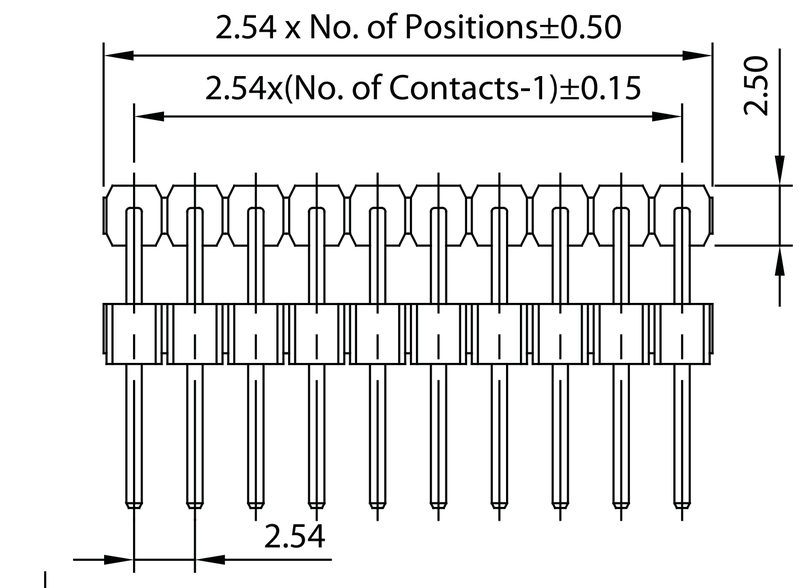

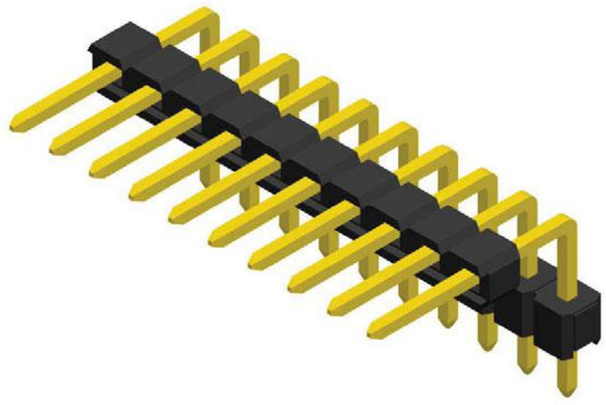

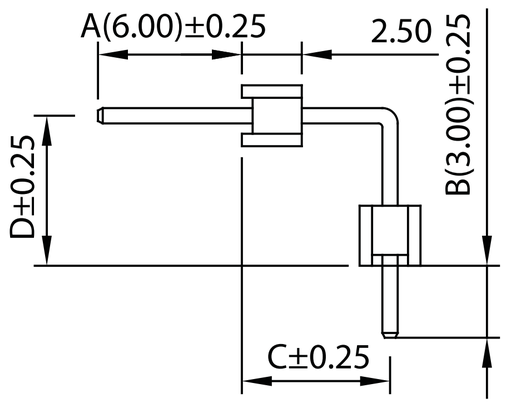

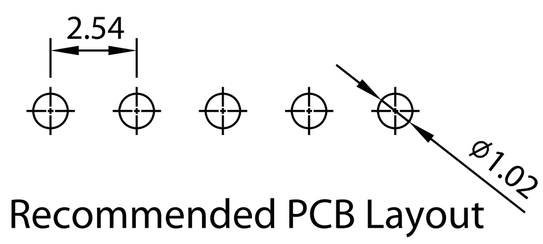

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

PLHD-xxR

Pin Header 2.54mm 2 Row H=2.5mm Stack Right Angle Type

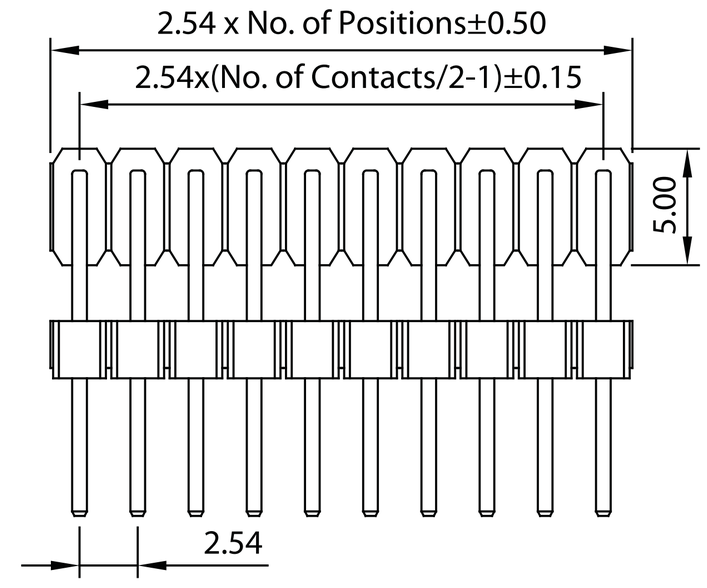

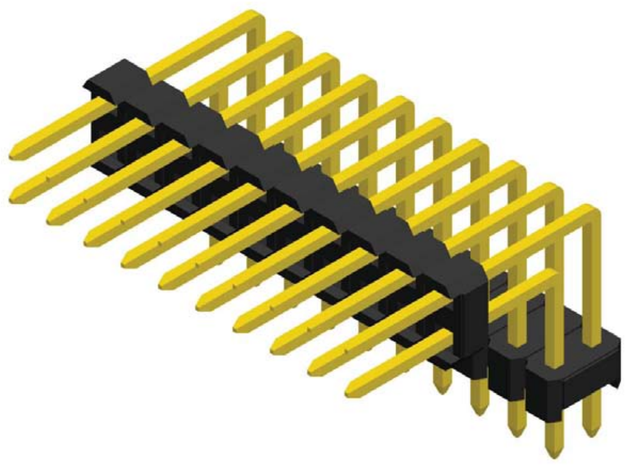

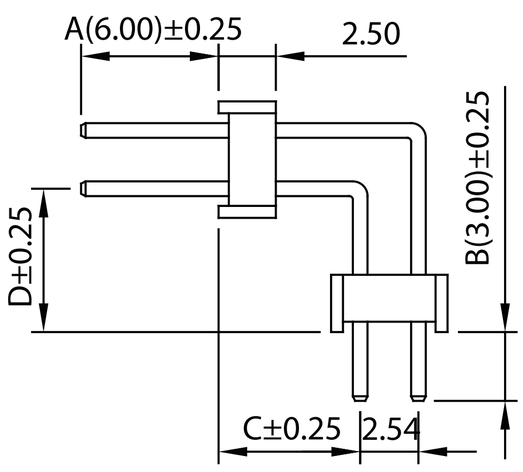

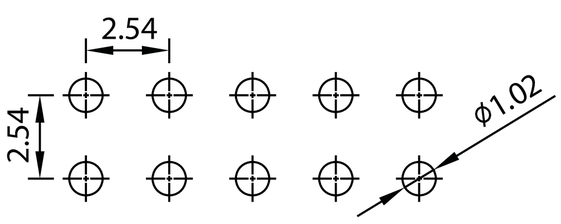

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Radiotech

Tel.: (+7 495) 795-08-05
E-mail: info@rct.ru
Web: www.rct.ru